




Side View

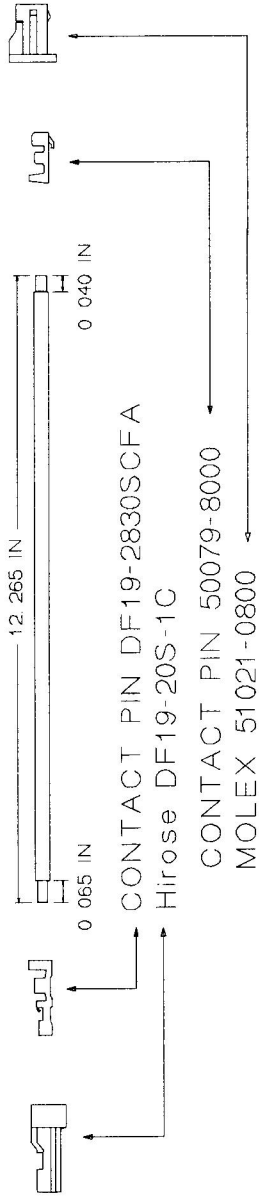

Side View

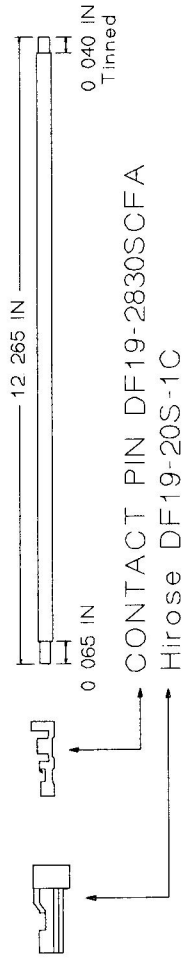

Top View

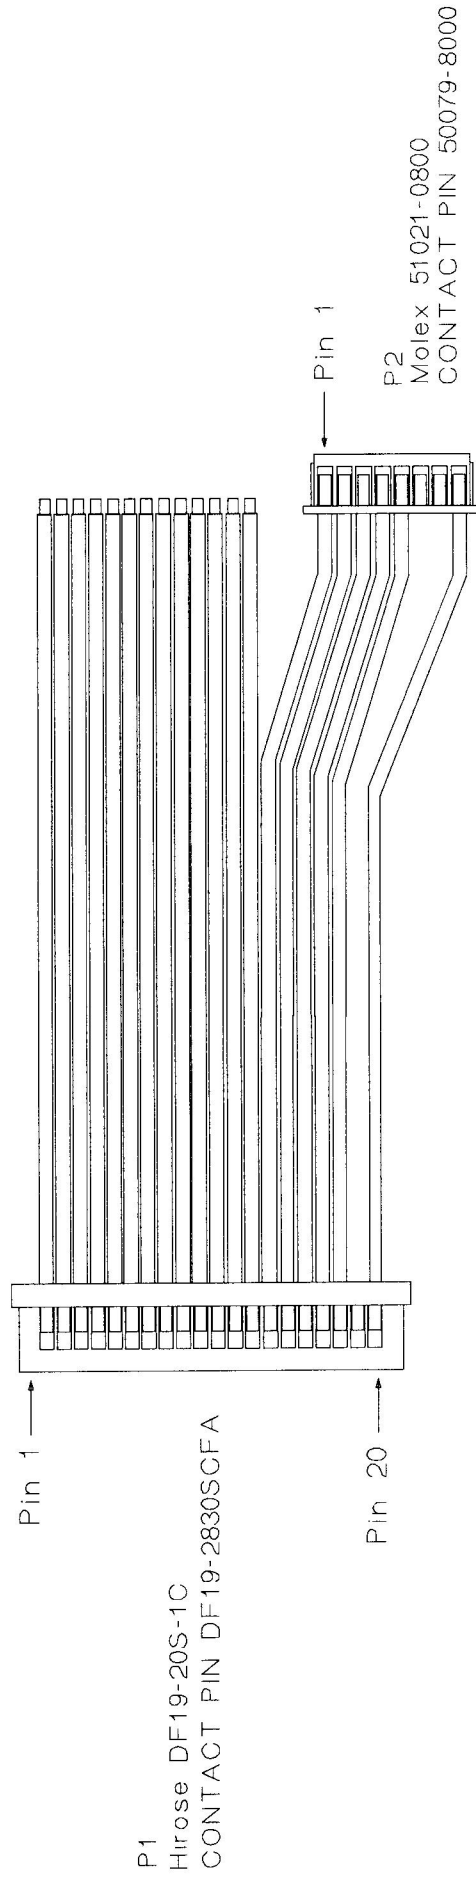

27-A0034

RoHS Compliant Cable Assembly

Applied Concepts Inc. - 06/16/08

SHEET 1 OF 2 REV B

27-A0034 BOM

- 1) Hirose DF19-20S-1C connector
- 6) DF19-2830SCFA Contact pins
- 1) Molex 51021-0800 connector
- 6) Molex 50079-8000 Contact pins
- 1) Yellow 28 AWG Stranded wire, Length = 12.265 IN
- 8) Black 28 AWG Stranded wire, Length = 12.265 IN
- 2) Red 28 AWG Stranded wire, Length = 12.265 IN
- 3) White 28 AWG Stranded wire, Length = 12.265 IN
- 3) Green 28 AWG Stranded wire, Length = 12.265 IN
- 3) Orange 28 AWG Stranded wire, Length = 12.265 IN

Note(s):

Pin 20 of P1: Yellow 28 AWG stranded wire
Pins 3,4,13,14,15,16,17,18 of P1: Black 28 AWG stranded wire
Pins 1,2 of P1: Red 28 AWG stranded wire
Pins 5,8,11 of P1: White 28 AWG stranded wire
Pins 6,9,12 of P1: Green 28 AWG stranded wire
Pins 7,10 of P1: Orange 28 AWG stranded wire
Connect Pin 20 of P1 to Pin 8 of P2
Connect Pins 14,15,16,17,18 of P1 to Pins 5,4,3,2,1 of P2 consecutively

27-A0034

RoHS Compliant Cable Assembly

Applied Concepts Inc. - 06/16/08

SHEET 2 OF 2 REV B