


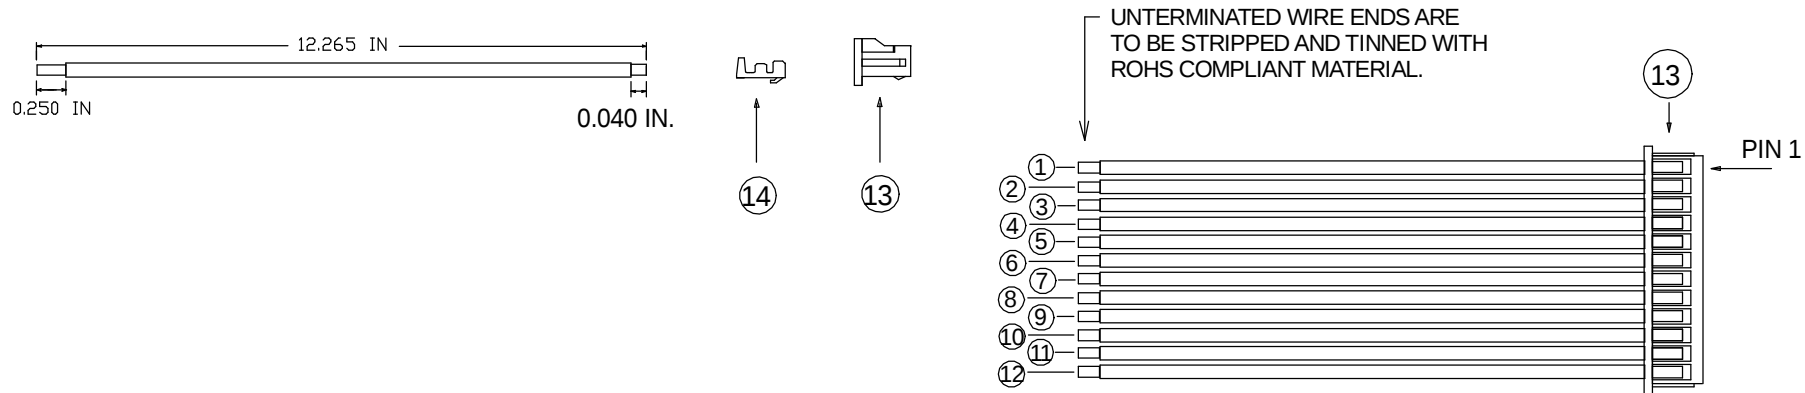

BOM

ITEM NO.	QTY	P/N	DESCRIPTION
1	1		WIRE, 26AWG STRANDED, UL1061 80C/300V, LENGTH = 12.265 IN., COLOR = RED
2	1		WIRE, 26AWG STRANDED, UL1061 80C/300V, LENGTH = 12.265 IN., COLOR = RED
3	1		WIRE, 26AWG STRANDED, UL1061 80C/300V, LENGTH = 12.265 IN., COLOR = RED
4	1		WIRE, 26AWG STRANDED, UL1061 80C/300V, LENGTH = 12.265 IN., COLOR = BLACK
5	1		WIRE, 26AWG STRANDED, UL1061 80C/300V, LENGTH = 12.265 IN., COLOR = BLACK
6	1		WIRE, 26AWG STRANDED, UL1061 80C/300V, LENGTH = 12.265 IN., COLOR = BLACK
7	1		WIRE, 26AWG STRANDED, UL1061 80C/300V, LENGTH = 12.265 IN., COLOR = YELLOW
8	1		WIRE, 26AWG STRANDED, UL1061 80C/300V, LENGTH = 12.265 IN., COLOR = BLUE
9	1		WIRE, 26AWG STRANDED, UL1061 80C/300V, LENGTH = 12.265 IN., COLOR = GRAY
10	1		WIRE, 26AWG STRANDED, UL1061 80C/300V, LENGTH = 12.265 IN., COLOR = BLUE
11	1		WIRE, 26AWG STRANDED, UL1061 80C/300V, LENGTH = 12.265 IN., COLOR = GRAY
12	1		WIRE, 26AWG STRANDED, UL1061 80C/300V, LENGTH = 12.265 IN., COLOR = YELLOW
13	1	MOLEX 51021-1200	CONNECTOR
14	14	MOLEX 50079-8000	CONTACT PIN

SHEET 1 OF 1, 01/10/14

Cable Assembly, RoHS Compliant
Label Instructions, SD-0550

APPLIED CONCEPTS INC

27-R0040