


FROM	TERM.	WIRE COLOR	TO	TERM.
P1-1	50079-8000	RED	P2-1	CI14T011PE0
P1-2	50079-8000	RED	P2-2	CI14T011PE0
P1-6	50079-8000	BLACK	P2-4	CI14T011PE0
P1-7	50079-8000	BLACK	P2-5	CI14T011PE0
P1-8	50079-8000	BLACK	P2-6	CI14T011PE0
P1-9	50079-8000	BLACK	P2-7	CI14T011PE0
P1-10	50079-8000	BLACK	P2-8	CI14T011PE0

This connector interfaces with the LED Driver output connector

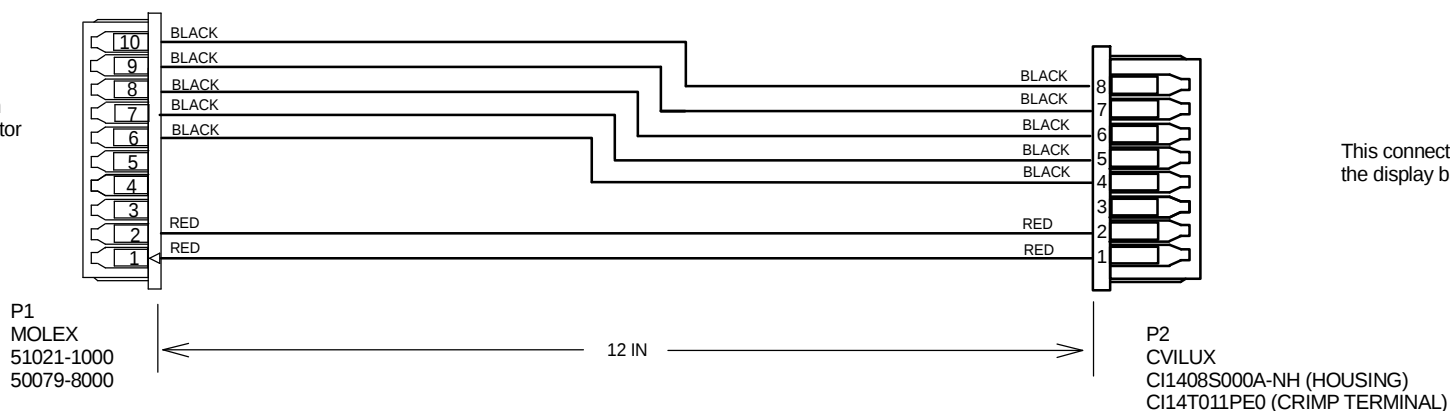

This connector interfaces with the display backlight connector

BOM REF.	QTY	MANUFACTURER	P/N	DESCRIPTION
P1	1	MOLEX	51021-1000	CONNECTOR HOUSING, 10 CIRCUIT
P1	7	MOLEX	50079-8000	CONTACT SOCKET (NOT SHOWN)
P2	1	CVILUX	CI1408S000A-NH	CONNECTOR HOUSING, 8 CIRCUIT
P2	7	CVILUX	CI14T011PE0	CRIMP TERMINAL, 28 - 32 AWG (NOT SHOWN)
WIRE	AR	ALPHA WIRE OR EQUIVALENT	1852	WIRE, 28 (7/36) AWG, PVC 105C, MAX OD OF INSULATION = 0.037 INCHES

Cable Assembly, Output, RoHS Compliant
Connects ACI-E040550-2189 Driver to
AUO G170EG01 V1 17.0" Display, X-3705

LABEL INSTRUCTIONS

DRAWING NOT TO SCALE

SHEET 1 OF 1, 12/18/13

SD-0550

APPLIED CONCEPTS, INC.

27-R0137