


FROM	TERM.	WIRE COLOR	TO	TERM.
P1-1	50079-8000	RED	P3-1	CI14T011PE0
P1-6	50079-8000	BLACK	P3-4	CI14T011PE0
P1-7	50079-8000	BLACK	P3-5	CI14T011PE0
P1-8	50079-8000	BLACK	P3-6	CI14T011PE0
P1-9	50079-8000	BLACK	P3-7	CI14T011PE0
P1-10	50079-8000	BLACK	P3-8	CI14T011PE0
P2-6	50079-8000	BLACK	P3-2	CI14T011PE0
P2-7	50079-8000	BLACK	P3-3	CI14T011PE0

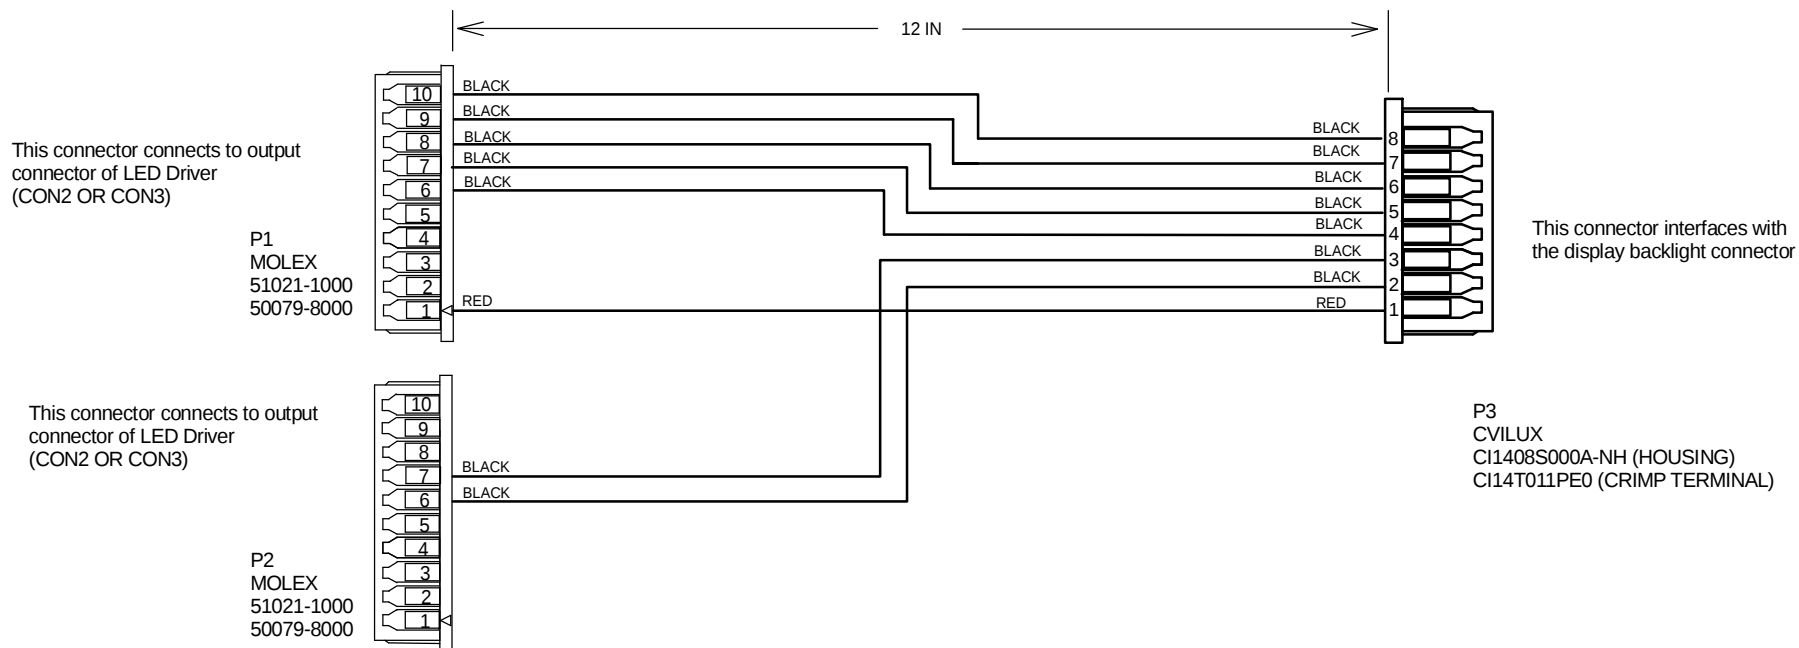

BOM

REF.	QTY	MANUFACTURER	P/N	DESCRIPTION
P1, P2	2	MOLEX	51021-1000	CONNECTOR HOUSING, 10 CIRCUIT
P1, P2	8	MOLEX	50079-8000	CONTACT SOCKET (NOT SHOWN)
P3	1	CVILUX	CI1408S000A-NH	CONNECTOR HOUSING, 8 CIRCUIT
P3	8	CVILUX	CI14T011PE0	CRIMP TERMINAL, 28 - 32 AWG (NOT SHOWN)
WIRE	AR	ALPHA WIRE OR EQUIVALENT	1852	WIRE, 28 (7/36) AWG, PVC 105C, MAX OD OF INSULATION = 0.037 INCHES

Cable Assembly, Output, RoHS Compliant
Connects ACI-E040840-2246 Driver to
AUO G240HW01 V0 24.0" Display, X-3731

LABEL INSTRUCTIONS

SD-0550

DRAWING NOT TO SCALE

APPLIED CONCEPTS, INC.

SHEET 1 OF 1, 12/18/13

27-R0140