



FROM	TERM.	TO	TERM.	WIRE COLOR
P1-1	SSH-003T-P0.2-H	P3-1	50079-8000	RED
P1-2	SSH-003T-P0.2-H	P2-1	50079-8000	BLACK
P1-3	SSH-003T-P0.2-H	P3-2	50079-8000	RED
P1-4	SSH-003T-P0.2-H	P2-2	50079-8000	BLACK

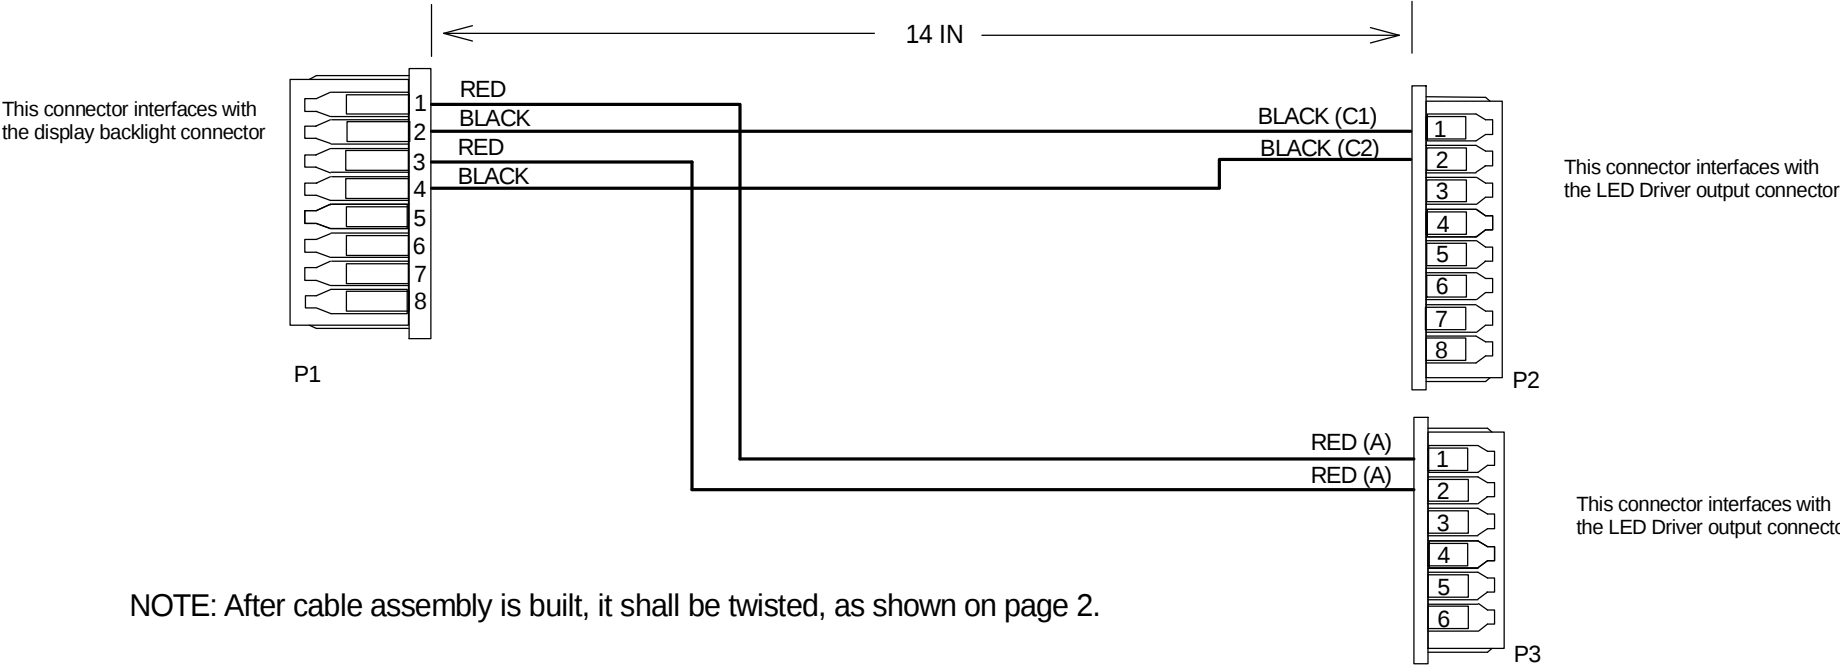

NOTE: After cable assembly is built, it shall be twisted, as shown on page 2.

BOM				
REF.	QTY	MANUFACTURER	P/N	DESCRIPTION
P1	1	JST	SHR-08V-S	CONNECTOR HOUSING, 8 CIRCUIT
P1	4	JST	SSH-003T-P0.2-H	CONTACT SOCKET (NOT SHOWN)
P2	1	MOLEX	51021-0800	CONNECTOR HOUSING, 8 CIRCUIT
P3	1	MOLEX	51021-0600	CONNECTOR HOUSING, 6 CIRCUIT
P2, P3	4	MOLEX	50079-8000	CONTACT SOCKET (NOT SHOWN)
WIRE, RED	AR	ALPHA WIRE OR EQUIVALENT	2842/7 RED	WIRE, RED, 28 (7/36) AWG, 105C
WIRE, BLACK	AR	ALPHA WIRE OR EQUIVALENT	2842/7 BLACK	WIRE, BLACK, 28 (7/36) AWG, 105C

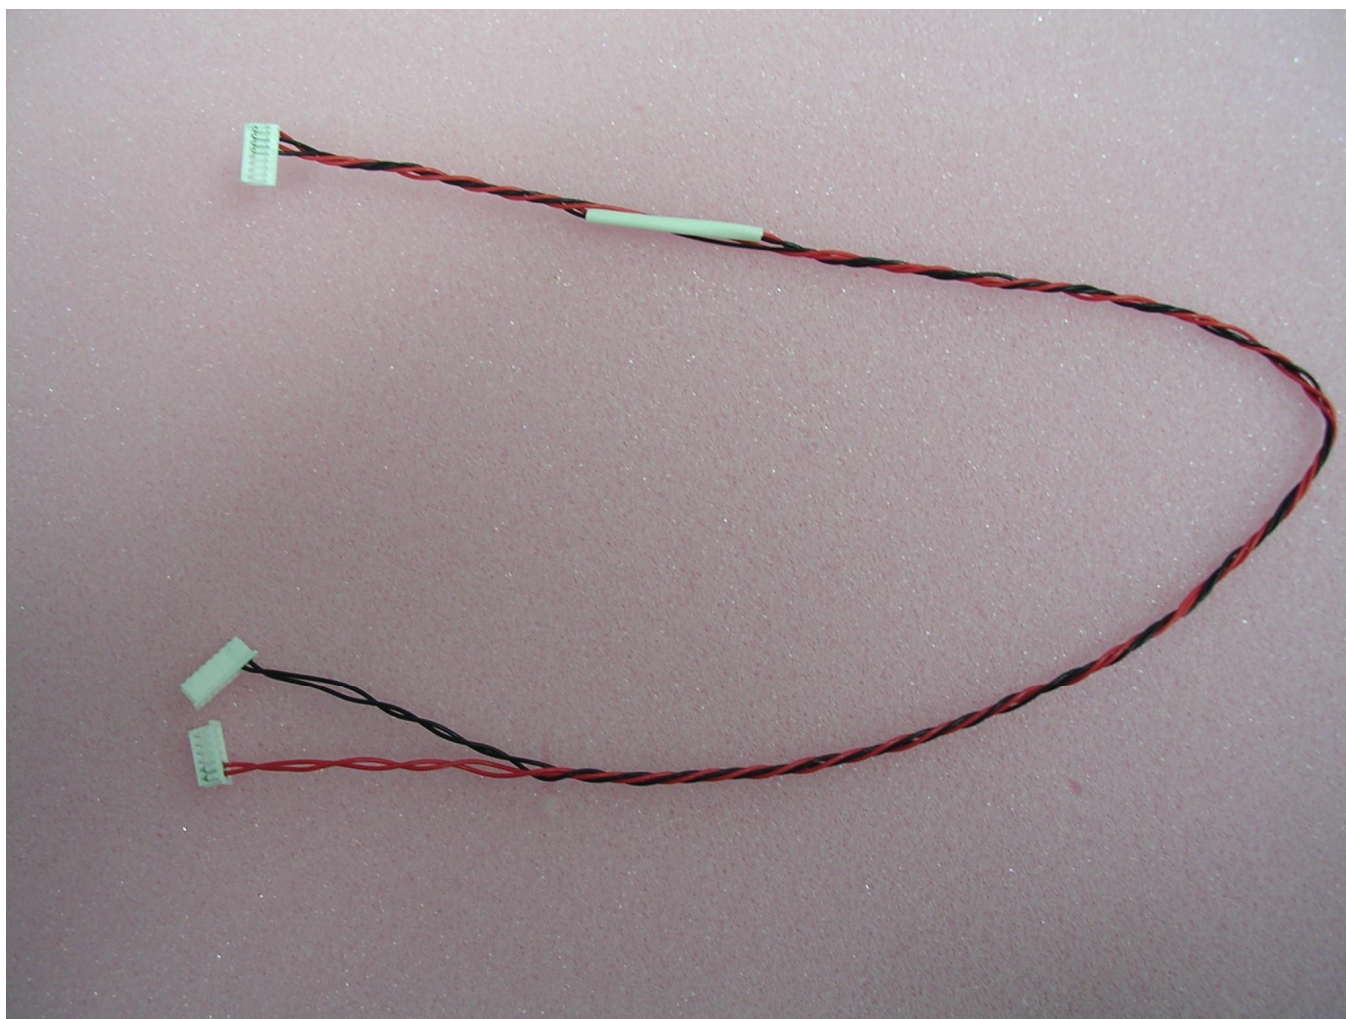

NOTE: After cable assembly is built, it shall be twisted, as shown in this photo.

LABEL INSTRUCTIONS	DRAWING NOT TO SCALE
SD-0550	APPLIED CONCEPTS, INC.

SHEET 2 OF 2, 08/28/14
Cable Assembly, RoHS Compliant, used with Common Anode I-Lite
27-R0205