

I-DRIVE 5, 19.2 WATT LED DRIVER (60V, One to Eight Channels)

GENERAL DESCRIPTION

The ACI-E060320-2271 represents the 5th generation of I-Drive technology used for powering LED backlights.

Operating as a true constant current source and capable of driving up to 8 parallel banks of series connected LEDs with a forward voltage drop up to 60V. This driver provides a complete integrated solution that is regulated over an input range of +10V to +18V.

Please refer to Table 1 on page 3, for the maximum output current per channel, based on the number of channels connected.

Simple to connect and operate, this driver solution is capable of providing precise control to support dimming applications with a minimum of 3000:1.

This unit features enable and intensity control inputs, and is designed to work with the Digital View LCD Controller and Button Board (See page 3 for more information).

MECHANICAL/ENVIRONMENTAL

Weight = 35.7 grams

Altitude = 35,000 ft max.

Humidity < 95% non-condensing

Size (L x W x H) = 3.25 IN x 2.00 IN x 0.47 IN


PCB thickness = 0.062 IN

Mounting Holes = 0.128 IN diameter (X2)

Input Power & Control Connector = CON1

LED Output Connectors = CON2 and CON3

RoHS Compliant

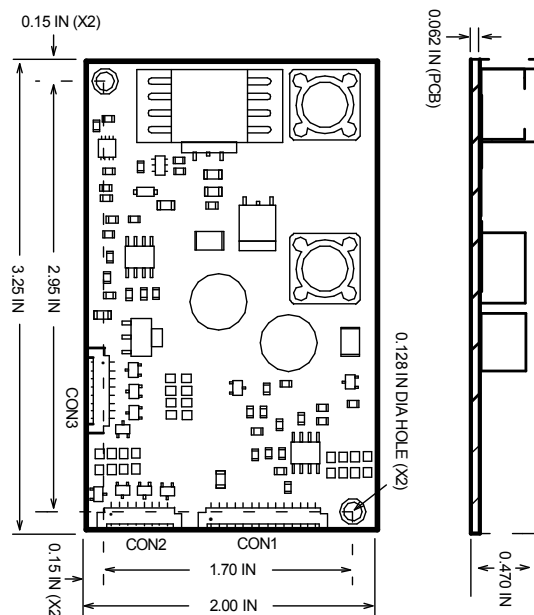

INPUT CONNECTOR

CON1
MOLEX 53261-1471

PIN# FUNCTION

1	+10 to +18V (PWR)
2	+10 to +18V (PWR)
3	+10 to +18V (PWR)
4	+10 to +18V (PWR)
5	GND (PWR)
6	GND (PWR)
7	GND (PWR)
8	GND (PWR)
9	ENABLE
10	ICNTL
11	TBD
12	TBD
13	+5VDC REF OUT
14	GND (SIGNAL)

OUTPUT CONNECTOR

CON2
MOLEX 53261-0871

PIN# FUNCTION

1	+ LED (ANODE)
2	+ LED (ANODE)
3	+ LED (ANODE)
4	+ LED (ANODE)
5	- LED (CATHODE 1) Master*
6	- LED (CATHODE 2)
7	- LED (CATHODE 3)
8	- LED (CATHODE 4)

*The Master Channel must always be used.

OUTPUT CONNECTOR

CON3
MOLEX 53261-0871

PIN# FUNCTION

1	+ LED (ANODE)
2	+ LED (ANODE)
3	+ LED (ANODE)
4	+ LED (ANODE)
5	- LED (CATHODE 5)
6	- LED (CATHODE 6)
7	- LED (CATHODE 7)
8	- LED (CATHODE 8)

PRODUCT DATA SHEET

02/18/13

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
Vin	Supply Voltage (Referenced to Ground)	-0.7 to 20	Vdc
Vip	Voltage applied to any Input Pin (Referenced to Ground)	-0.7 to 5.7	Vdc
Iop	Current sourced or sinked from any Output Control Pin	+/- 10	mAdc
Pin	Input Power (DC Input Voltage x DC Input Current)	26.4	W
Top	Operating Temperature (Still air ambient around Driver)	-30 to +85	°C
Tstg	Storage Temperature	-40 to +105	°C

*Maximum Ratings are those values beyond which damage to the driver may occur.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
Vin	Supply Voltage (Referenced to Ground)	10.0	18.0	Vdc
Vf	Series Connected Cumulative LED Forward-Drop Voltage	**Vin + 1	60	Vdc
Icctl	LED Intensity Control Voltage	0.1	4.6	Vdc

**Vin must be less than the minimum Forward-Drop Voltage (Vf).

ELECTRICAL CHARACTERISTICS

Vin = +12V, Vf = 60V, # of Channels = 8, Icctl = +0.1V, Enable = +5V unless otherwise specified.

Symbol	Parameter	Test Conditions	Min	Nom	Max	Unit
OCV	Open Circuit Voltage	No Load	65	72	79	Vdc
Iout	Output Current per Channel		35	40	45	mAdc
Iadj	Nominal Output Current Adjust Range	Icctl(Pin 10)= +4.6V to +0.1V	0		40	mAdc
ENoff	Enable Control, Unit Off				0.5	Vdc
ENon	Enable Control, Unit ON		2.0			Vdc
+5Vref	+5V Output Reference Voltage	1K Ohm Load to Ground (Pin 13)	4.75	5.0	5.25	Vdc
Iin	Input Current Draw			1.9		Adc
Iind	Input Current Draw (Disabled)	Enable (Pin 9) = 0V			0.06	Adc
Eff	Electrical Efficiency			87		%

397 Route 281 – P.O. Box 1175
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

PRODUCT DATA SHEET


02/18/13

Number of Channels Connected	1	2	3	4	5	6	7	8
Maximum Output Current per Channel (mA)	320	160	106.7	80	64	53.3	45.7	40

Table 1 - Maximum Output Current per Channel, based on the number of channels connected

Pin 5 of CON2 is the Master Channel and must always be used.

BRIGHTNESS CURVE

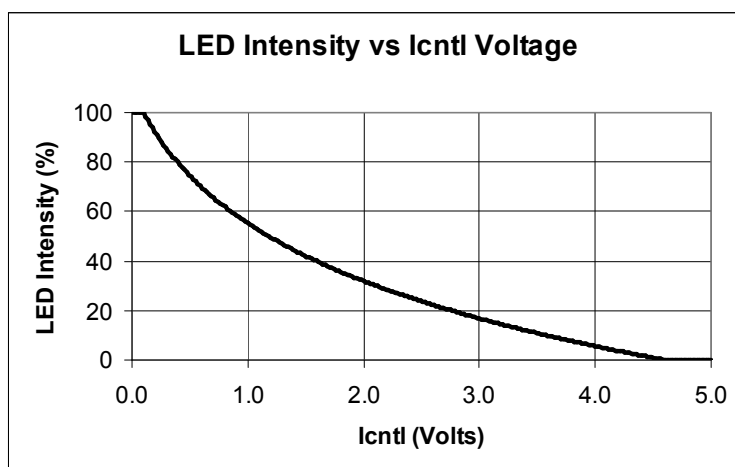

NOTE: The intensity response curve is designed to be compatible with the Digital View LCD Controller and Button Board.

Digital View LCD Controllers and Jumper Settings

LCD Controller		Jumper Settings
Model	P/N	
ALR-1400		(JB2 = 2-3) (JB3 = 1-2) (JP2 = 1-2)
ALR-1920		(JB2 = 2-3) (JB3 = 1-2) (JB5 = 1-2)
DVS-1600		(JB1 = 2-3) (JB2 = 2-3) (JB3 = 1-2) (JB5 = 1-2)
SP-1600		(JB2 = 2-3) (JB3 = 1-2) (JP3 = 1-2)
SVH-1920		(JB2 = 2-3) (JB3 = 1-2) (JP3 = 1-2)
SVX-1920	41721003X-3 or up	(JB1 = 1-2) (JB2 = 2-3) (JB3 = 1-2) (JB5 = 1-2)