


CONNECTOR RUN LIST:

FROM	TO
P1-1	P2-1
P1-2	P2-2
P1-3	P2-3
P1-8	P2-6
P1-9	P2-7
P1-10	P2-8
P1-11	P2-9
P1-12	P2-10

NOTES:
1. IF USING 80C RATED WIRE PROVIDES
A COST SAVINGS, THEN PLEASE ALSO
QUOTE USING 80C RATED WIRE.

This connector connects
to Led Driver Output

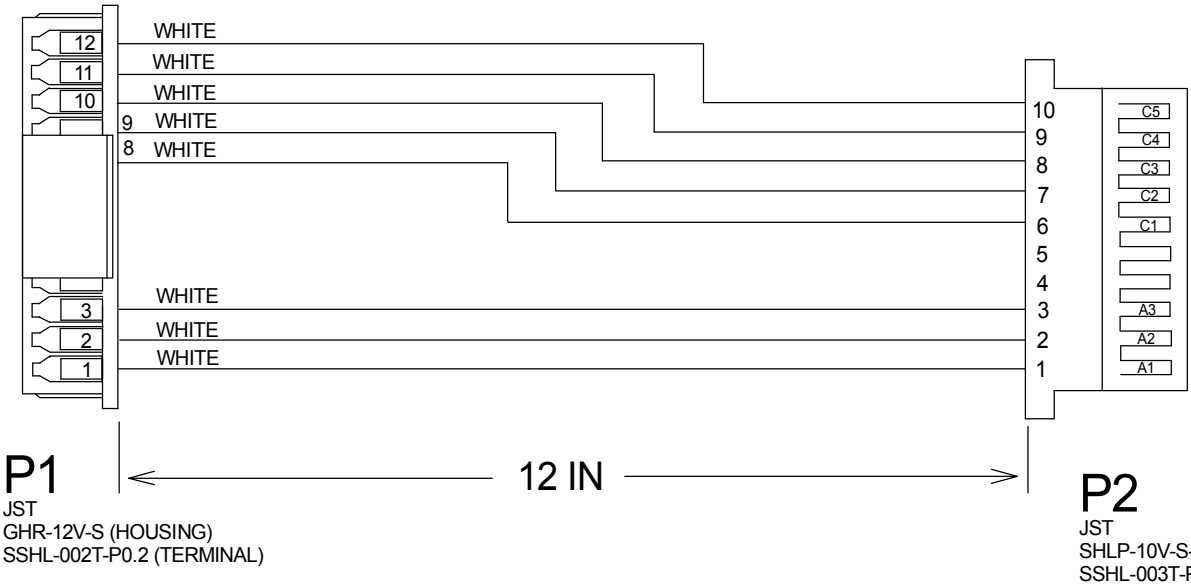

BOM				
REF.	QTY	MANUFACTURER	P/N	DESCRIPTION
P1	1	JST	GHR-12V-S	CONNECTOR HOUSING, 12 CIRCUIT
P1	8	JST	SSHL-002T-P0.2	CONTACT SOCKET (NOT SHOWN)
P2	1	JST	SHLP-10V-S-B	CONNECTOR HOUSING, 10 CIRCUIT
P2	8	JST	SSHL-003T-P0.2H	CONTACT SOCKET (NOT SHOWN)
WIRE	AR	ALPHA WIRE OR EQUIVALENT	2842/7 WHITE	WIRE, WHITE, 28 (7/36) AWG, 105C (NOTE 1)

Cable Assembly, Output, RoHS Compliant
X-4134 Connects ACI-L040550-2617 to
NLT NL12880BC20-07F 12.1"

LABEL INSTRUCTIONS

DRAWING NOT TO SCALE

SHEET 1 OF 1, 02/27/15

SD-0550

APPLIED CONCEPTS, INC.

27-R0218