

LCD Specification

LCD Group

LQ235D1LW03 LCD Module

Product Specification

July 2013

Normally Black HD1080 Module featuring
an LVDS interface, long-life LED backlight,
symmetrical 176° viewing angle,
extended temperature operation,
shock and vibration resistance;
450 nits brightness, and 5000:1 contrast.

Full Specifications Listing.

PREPARED BY: DATE

APPROVED BY: DATE

SHARP

DISPLAY DEVICE BUSINESS GROUP
SHARP CORPORATION
SPECIFICATION

SPEC No. LD-T130001B

FILE No.

ISSUE: July. 3, 2013

PAGE :27 pages

Development Department II
Display Device Unit V
Display Device Business Division

DEVICE SPECIFICATION FOR

TFT-LCD Module

MODEL No. LQ235D1LW03

CUSTOMER' S APPROVAL

BY _____

PRESENTED

BY


M. Watanabe

Unit Deputy General Manager
Development Department II
Display Device Unit V
Display Device Business Division
SHARP CORPORATION

RECORDS OF REVISION

LQ235D1LW03

[illegible]

1. Application

This specification applies to the color 23.5" TFT-LCD module LQ235D1LW03.

* This specification is proprietary products of SHARP CORPORATION ("SHARP") and includes materials protected under copyright of SHARP. Do not reproduce or cause any third party to reproduce them in any form or by any means, electronically or mechanically, for any purpose, in whole or in part, without the express written permission of SHARP

* In case of using the device for applications such as control and safety equipment for transportation (aircraft, trains, automobiles, etc.), rescue and security equipment and various safety related equipment which require higher reliability and safety, take into consideration that appropriate measures such as fail-safe functions and redundant system design should be taken.

* Do not use the device for equipment that requires an extreme level of reliability, such as aerospace applications, telecommunication equipment (trunk lines), nuclear power control equipment and medical or other equipment for life support.

* SHARP assumes no responsibility for any damage resulting from the use of the device which does not comply with the instructions and the precautions specified in this specification.

* Contact and consult with a SHARP sales representative for any questions about this device.

2. Overview

This module is a color active matrix LCD panel incorporating amorphous silicon TFT (Thin Film Transistor).

It is composed of a color TFT-LCD panel, driver ICs, control circuit and edge-lite LED backlight system etc.

Graphics and texts can be displayed on a 1920×RGB×1080 dots panel with about 16 million color by using LVDS RGB (at the case of 8bits) (Low Voltage Differential Signaling) interface, +12V of DC supply voltages.

And in order to improve the response time of LCD, this module applies the Over Shoot driving (O/S driving) technology for the control circuit. In the O/S driving technology, signals are being applied to the Liquid Crystal according to a pre-fixed process as an image signal of the present frame when a difference is found between image signal of the previous frame and that of the current frame after comparing them.

With this technology, image signals can be set so that liquid crystal response completes within one frame. As a result, motion blur reduces and clearer display performance can be realized

This LCD module also adopts Frame Rate Enhanced Driving method.

With combination of these technologies, motion blur can be reduced and clearer display performance can be realized.

3. Mechanical Specifications

Parameter	Specifications	Unit
Display size	59.809 (Diagonal)	cm
	23.547 (Diagonal)	inch
Active area	521.28(H) x 293.22 (V)	mm
Pixel Format	1920(H) x 1080 (V)	pixel
	(1pixel = R + G + B dot)	
Pixel pitch	0.0905(H) x 0.2715 (V)	mm
Pixel configuration	R,G,B vertical stripe	
Display mode	Normally Black	
Outline Dimensions *1	554.8(W)×319(H)×10.3(D) (*1) Excluded Control PWB	mm
Mass	2.8Kg	
Surface treatment	Anti Glare Hard Coat 3H Haze 2.0%	

(*1)Outline dimensions are shown in Fig.3

4. Input Terminals

4-1. TFT Panel Driving

CN1 (Interface signals and +12V DC power supply)

Using connector : FI-RNE51SZ-HF (Japan Aviation Electronics Ind., Ltd.)

Mating connector : FI-RE51HL, FI-RE51CL (Japan Aviation Electronics Ind., Ltd.)

Mating LVDS transmitter : THC63LVD1023 or equivalent device

No	Signal	Note	Remark
1	GND	GND	
2	SDA	[Note 1]	Slave address : B4 / Pull up (3.3[V])
3	SCL	[Note 1]	Slave address : B4 / Pull up (3.3[V])
4	(GSP_out)	(Frame sync signal output)	High pulse output / frame [Note 4]
5	(R/W)	(Read/write enable for TCON ROM) (Low : Disenable, High : Enable)	
6	Reserved	Non-connection (default : OPEN)	OPEN
7	SELLVDS	Select LVDS data order [Note2]	Pull down (GND) [Note 3]
8	Reserved	Non-connection (default : OPEN)	OPEN
9	2D/3D	2D/3D mode selection (Low : 2D, High : 3D)	Pull down (GND) [Note 3]
10	Reserved	Non-connection (default : OPEN)	Pull down (GND) [Note 3]
11	GND	GND	
12	AIN0-	Aport (-)LVDS CH0 differential data input	
13	AIN0+	Aport (+)LVDS CH0 differential data input	
14	AIN1-	Aport (-)LVDS CH1 differential data input	
15	AIN1+	Aport (+)LVDS CH1 differential data input	
16	AIN2-	Aport (-)LVDS CH2 differential data input	
17	AIN2+	Aport (+)LVDS CH2 differential data input	
18	GND		
19	ACK-	Aport LVDS Clock signal(-)	
20	ACK+	Aport LVDS Clock signal(+)	
21	GND		
22	AIN3-	Aport (-)LVDS CH3 differential data input	
23	AIN3+	Aport (+)LVDS CH3 differential data input	
24	AIN4-	Aport (-)LVDS CH4 differential data input	
25	AIN4+	Aport (+)LVDS CH4 differential data input	
26	GND		
27	GND		
28	BIN0-	Bport (-)LVDS CH0 differential data input	
29	BIN0+	Bport (+)LVDS CH0 differential data input	
30	BIN1-	Bport (-)LVDS CH1 differential data input	
31	BIN1+	Bport (+)LVDS CH1 differential data input	
32	BIN2-	Bport (-)LVDS CH2 differential data input	
33	BIN2+	Bport (+)LVDS CH2 differential data input	
34	GND		
35	BCK-	Bport LVDS Clock signal(-)	
36	BCK+	Bport LVDS Clock signal(+)	
37	GND		
38	BIN3-	Bport (-)LVDS CH3 differential data input	
39	BIN3+	Bport (+)LVDS CH3 differential data input	
40	BIN4-	Bport (-)LVDS CH4 differential data input	
41	BIN4+	Bport (+)LVDS CH4 differential data input	
42	GND		
43	GND		
44	GND		
45	GND		
46	GND		
47	Reserved(VCC)	Connected to VCC(+12V) on CPWB	
48	VCC	+12V Power Supply	
49	VCC	+12V Power Supply	

50	VCC	+12V Power Supply	
51	VCC	+12V Power Supply	

CN2 (Interface signals)

Using connector : FI-RNE41SZ-HF (Japan Aviation Electronics Ind., Ltd.)


Mating connector : FI-RE41HL, FI-RE41CL (Japan Aviation Electronics Ind., Ltd.)

No	Signal	Note	Remark
1	Reserved (VCC)	+12V Power Supply	
2	Reserved (VCC)	+12V Power Supply	
3	Reserved (VCC)	+12V Power Supply	
4	Reserved (VCC)	+12V Power Supply	
5	Reserved	Non-connection (default : OPEN)	
6	OS	Over Shoot driving (Low : OFF, High or open : ON) (default : High)	Pull up (3.3[V])
7	Reserved	Non-connection (default : OPEN)	
8	Reserved	Non-connection (default : OPEN)	
9	GND		
10	CIN0-	Cport (-)LVDS CH0 differential data input	
11	CIN0+	Cport (+)LVDS CH0 differential data input	
12	CIN1-	Cport (-)LVDS CH1 differential data input	
13	CIN1+	Cport (+)LVDS CH1 differential data input	
14	CIN2-	Cport (-)LVDS CH2 differential data input	
15	CIN2+	Cport (+)LVDS CH2 differential data input	
16	GND		
17	CCK-	Cport LVDS Clock signal(-)	
18	CCK+	Cport LVDS Clock signal(+)	
19	GND		
20	CIN3-	Cport (-)LVDS CH3 differential data input	
21	CIN3+	Cport (+)LVDS CH3 differential data input	
22	CIN4-	Cport (-)LVDS CH4 differential data input	
23	CIN4+	Cport (+)LVDS CH4 differential data input	
24	GND		
25	GND		
26	DIN0-	Dport (-)LVDS CH0 differential data input	
27	DIN0+	Dport (+)LVDS CH0 differential data input	
28	DIN1-	Dport (-)LVDS CH1 differential data input	
29	DIN1+	Dport (+)LVDS CH1 differential data input	
30	DIN2-	Dport (-)LVDS CH2 differential data input	
31	DIN2+	Dport (+)LVDS CH2 differential data input	
32	GND		
33	DCK-	Dport LVDS Clock signal(-)	
34	DCK+	Dport LVDS Clock signal(+)	
35	GND		
36	DIN3-	Dport (-)LVDS CH3 differential data input	
37	DIN3+	Dport (+)LVDS CH3 differential data input	
38	DIN4-	Dport (-)LVDS CH4 differential data input	
39	DIN4+	Dport (+)LVDS CH4 differential data input	
40	GND		
41	GND		

[Note] GND of a liquid crystal panel drive part has connected with a module chassis.

[Note 1] Slave address "B4" is allocated for internal use for TCON board.

The equivalent circuit figure of the terminal


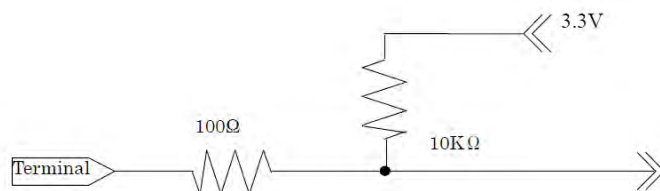


[Note 2] SELLVDS ORDER

SELLVDS		
DATA	L(GND) or Open [VESA , NS]	H(3.3V) [JEIDA]
TA0	R0(LSB)	R4
TA1	R1	R5
TA2	R2	R6
TA3	R3	R7
TA4	R4	R8
TA5	R5	R9(MSB)
TA6	G0(LSB)	G4
TB0	G1	G5
TB1	G2	G6
TB2	G3	G7
TB3	G4	G8
TB4	G5	G9(MSB)
TB5	B0(LSB)	B4
TB6	B1	B5
TC0	B2	B6
TC1	B3	B7
TC2	B4	B8
TC3	B5	B9(MSB)
TC4	N/A	N/A
TC5	N/A	N/A
TC6	DE(*)	DE(*)
TD0	R6	R2
TD1	R7	R3
TD2	G6	G2
TD3	G7	G3
TD4	B6	B2
TD5	B7	B3
TD6	N/A	N/A
TE0	R8	R0(LSB)
TE1	R9(MSB)	R1
TE2	G8	G0(LSB)
TE3	G9(MSB)	G1
TE4	B8	B0(LSB)
TE5	B9(MSB)	B1
TE6	N/A	N/A


N/A: Not Available

(*)Since the display position is prescribed by the rise of DE(Display Enable)signal, please do not fix DE signal during operation at "High".

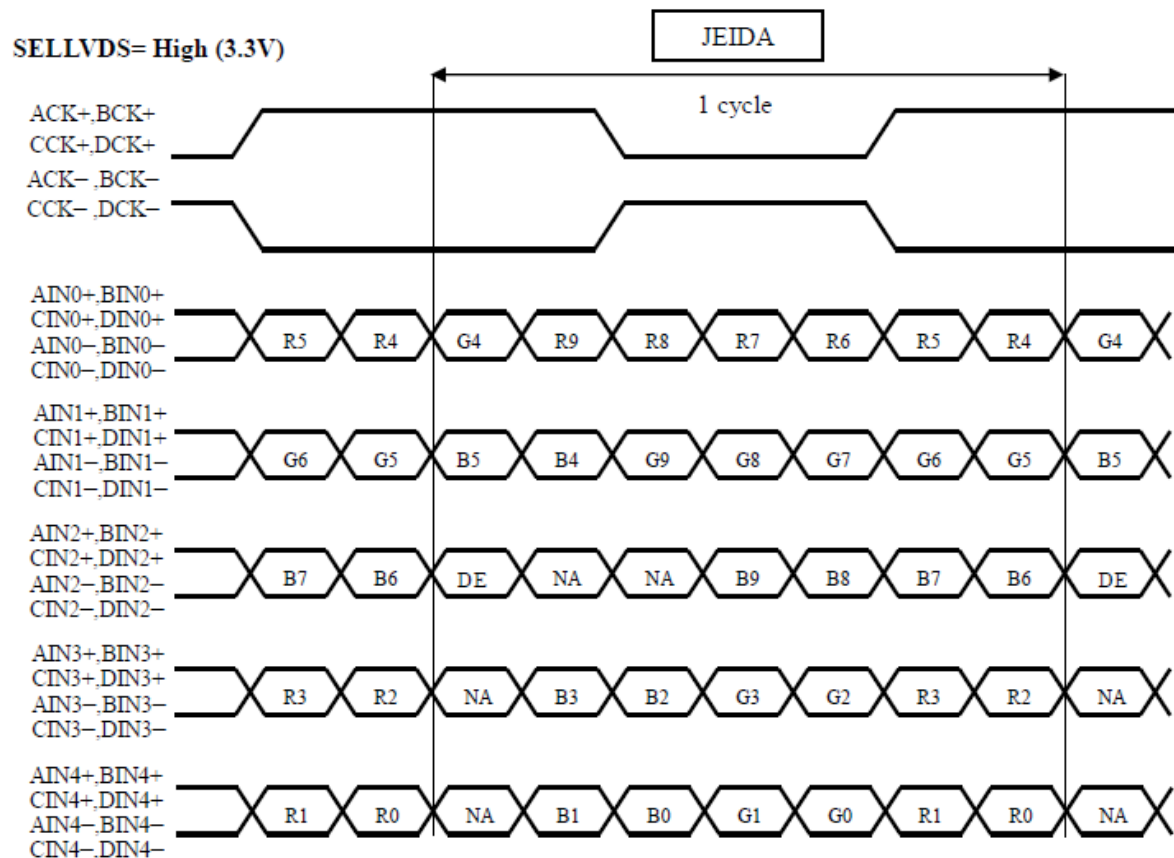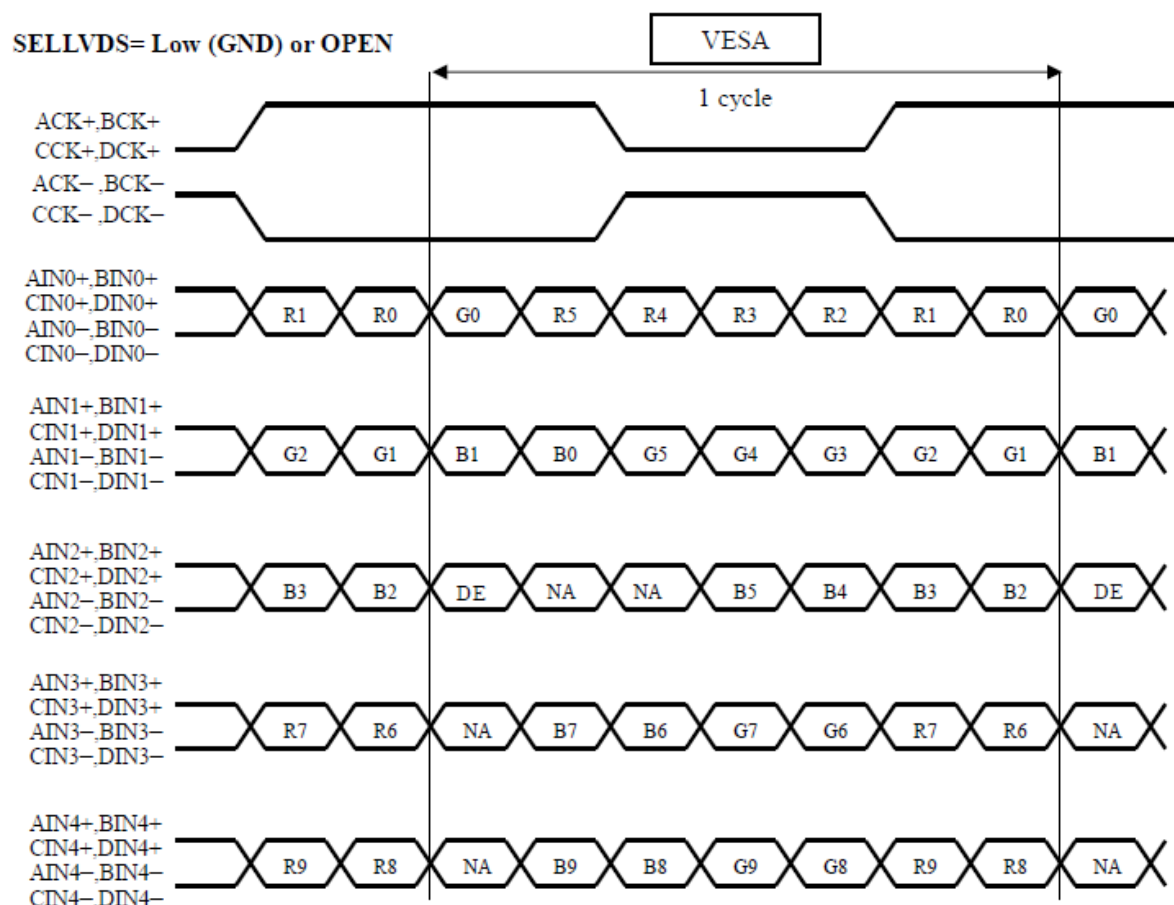

DE: Display Enable, N/A: Not Available (Fixed Low)

[Note 3] The equivalent circuit figure of the terminal

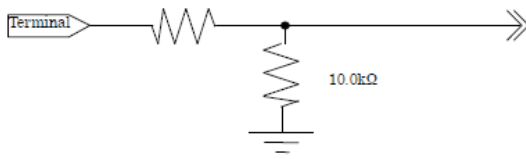

[Note 4] Optional output signal for goggle / backlight control.

4-2. Interface block diagram

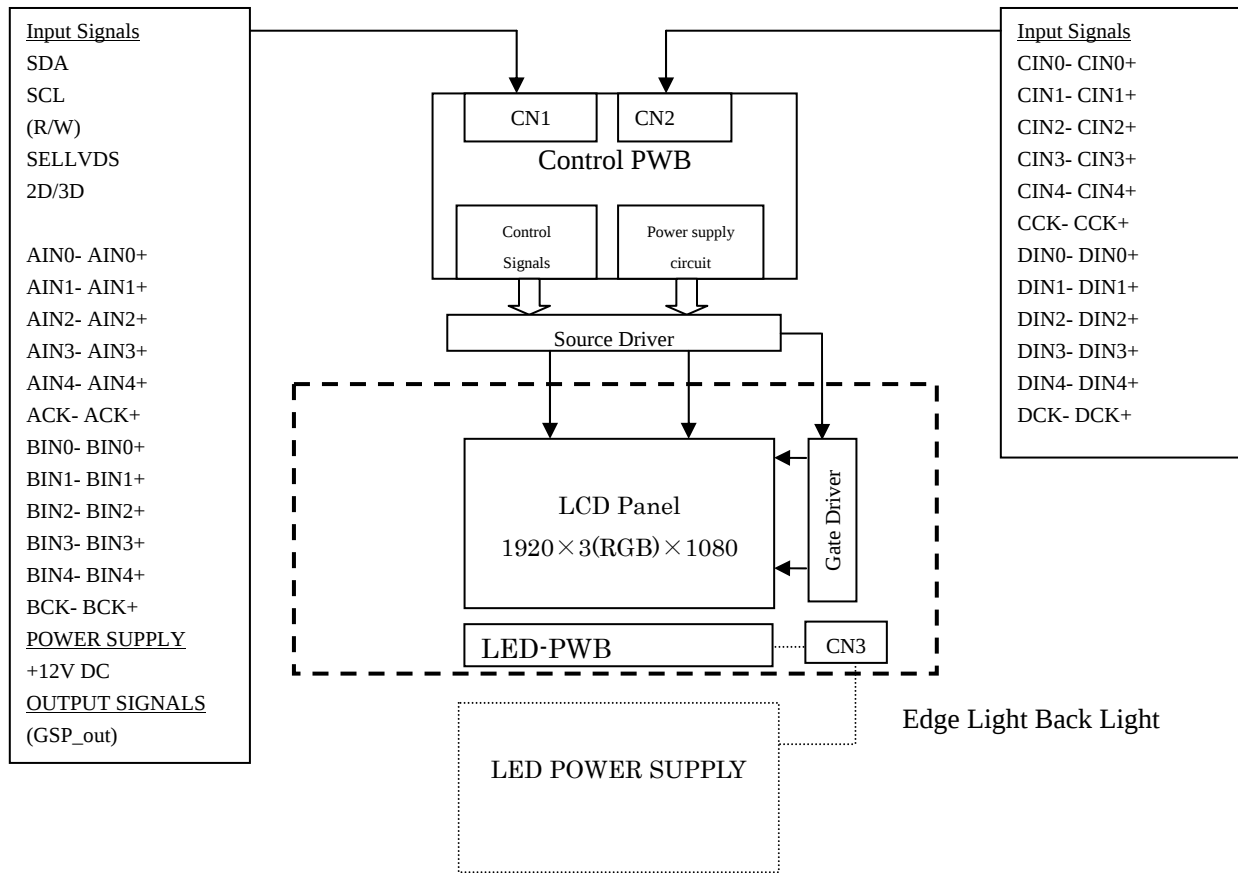


Fig.4-1 block diagram

4-3. Backlight driving

CN3 (DC power supply)

Using connector : CI1405M1HRL-NH (CviLux Corp.)

Mating connector : CI1405S0000-NH (CviLux Corp.)

Pin No.	Symbol	Function	Remark
1	PIN_1	LED Anode 1 terminal	
2	PIN_2	LED Cathode 1 terminal	
3	PIN_3	LED Cathode 2 terminal	
4	PIN_4	LED Cathode 3 terminal	
5	PIN_5	LED Cathode 4 terminal	

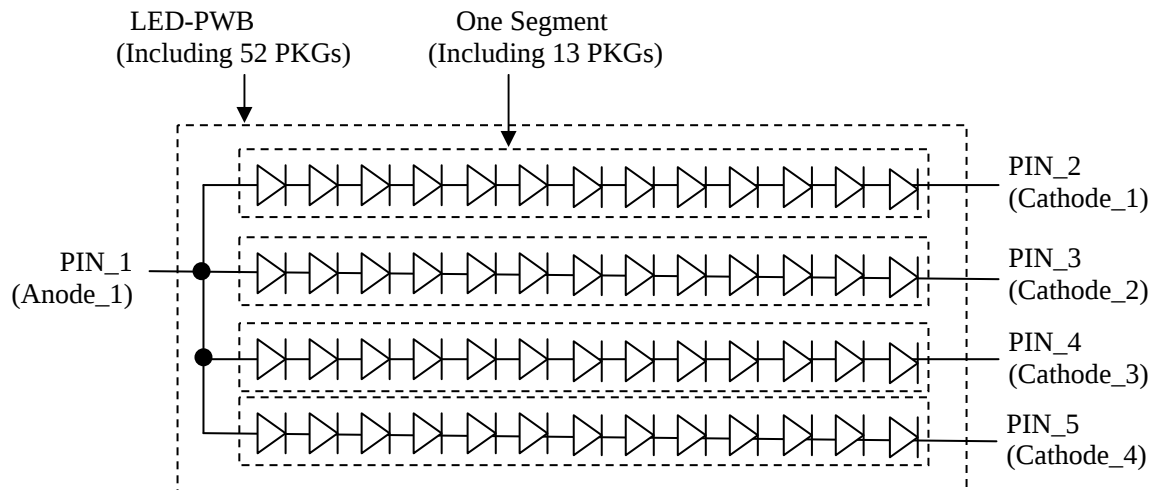


Fig.4-2 Equivalent Circuit of LED PWB

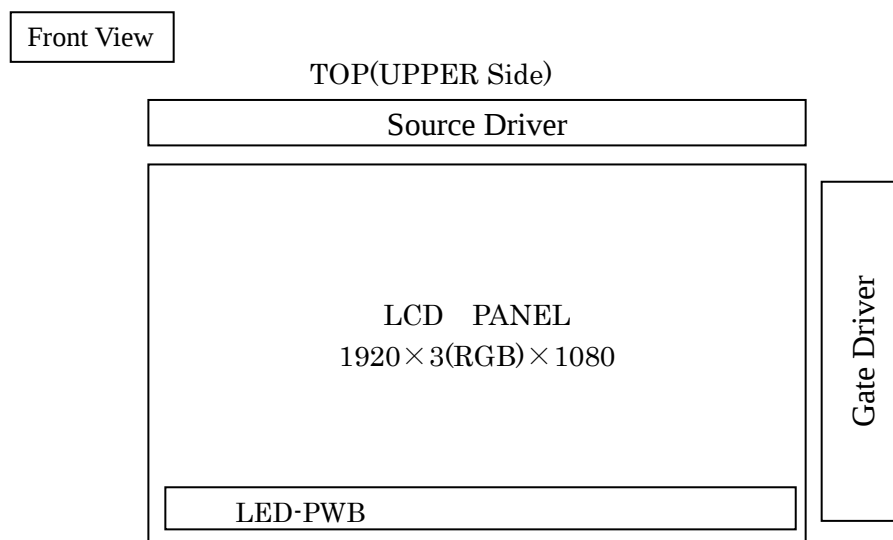


Fig.4-3 Layout of LED-PWB

4.4 The back light system characteristics

The back light system is side-edge type with LED.

The characteristics of LCD are shown in the following table. The value mentioned below is at the case of one LED.

Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
Life time	T _{LED}	30,000	40,000	-	Hour	

【Note】

LED life time is defined as the time when brightness becomes 50% of the original value in the continuous operation under the Ta=25°C (I_{LED} =120mA).

5. Absolute Maximum Ratings

Parameter	Symbol	Condition	Ratings	Unit	Remark
Input Voltage (for Control PWB)	V1	Ta=25°C	-0.3~+3.6	V	【Note 1】
12V supply voltage (for Control PWB)	VCC	Ta=25°C	0~+14.0	V	
Reverse voltage for LED-PWB	V _{LED}	Ta=25°C	3.8	V	【Note 3】
Forward Current for LED-PWB	I _{LED}	Ta=25°C	300	mA	【Note 4】
Storage temperature	Tstg	-	-25~+60	°C	【Note 2】
Operational Temperature (Ambient)	Tsf		0~+50	°C	

[Note 1] SDA, SCL, R/W, SELLVDS, 2D/3D

[Note 2] Humidity 95%RH Max.(Ta≤40°C)

Maximum wet-bulb temperature at 39 °C or less. (Ta>40°C)

No condensation.

[Note 3] Each LED 1 piece.

[Note 4] LED current (I_{LED}) is the value of each Segment.

6. Electrical Characteristics

6-1. Control circuit driving

GND=0V

Parameter		Symbol	Min.	Typ.	Max.	Unit	Remark
+12V Supply Voltage	Supply Voltage	VCC	11.4	12.0	12.6	V	【Note1】
	Current dissipation	ICC1		0.6	1.2	A	120Hz 【Note2】
		ICC2		0.7	1.4	A	240Hz 【Note2】
Input voltage for LVDS Signal		V _L	0	—	2.4	V	
Permissible input ripple voltage		VRP		-	100	mVp-p	VCC=+12V
Differential input threshold voltage	High	V _{TH}			100	mV	V _{CM} = +1.2V
	Low	V _{TL}	100			mV	
Input Low Voltage		V _{IL}	0		0.8	V	【Note3】
Input High Voltage		V _{IH}	2.0		3.3	V	
Terminal Register		RT		100		Ω	Differential Input

【Note】V_{CM}: Common mode voltage of LVDS driver.

【Note】About the relation between data input and back light lighting, please base on the above-mentioned input sequence. When back light is switched on before panel operation or after a panel operation stop, it may not display normally. But this phenomenon is not based on change of an incoming signal, and does not give damage to a liquid crystal display.

【Note1】

Input voltage sequences

50us < t₁ ≤ 20ms

30ms < t₂

500ms < t₃

0 < t₄

t₅ ≥ 1s

t₆ > 0

t₇ ≥ 1s

30ms < t₈ △ 1



Dip conditions for supply voltage

a) 9.1V ≤ V_{CC} ≤ 10.8V

t_d ≤ 10ms

b) V_{CC} < 9.1V

Dip conditions for supply voltage is based on input voltage sequence.

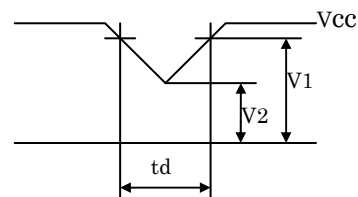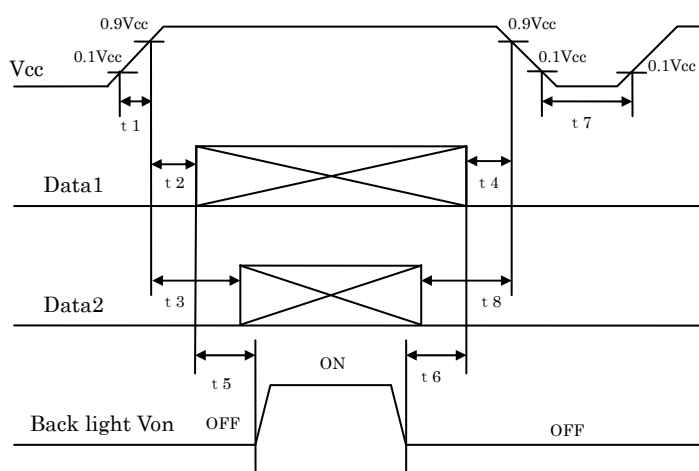

V1:10.8V

V2:9.1V


* Data1: ACK±, AIN0±, AIN1±, AIN2±, AIN3±, AIN4±, BCK±, BIN0±, BIN1±, BIN2±, BIN3±, BIN4±, CCK±, CIN0±, CIN1±, CIN2±, CIN3±, CIN4±, DCK±, DIN0±, DIN1±, DIN2±, DIN3±, DIN4±

* V_{CM} Voltage pursues the sequence mentioned above

* Data2: SDA, SCL, R/W, SELLVDS, 2D/3D

Due to ROM loading, I2C(SDA/SCL) and 2D/3D pin function can start to work after 500ms from power on (0.9VCC). 2D/3D pin can be switched to 3D after 500ms from power on (0.9VCC).


[Note 2] Typical current situation: 1024 gray-bar patterns. (Vcc = +12.0V)
The explanation of RGB gray scale is seen in section 8.

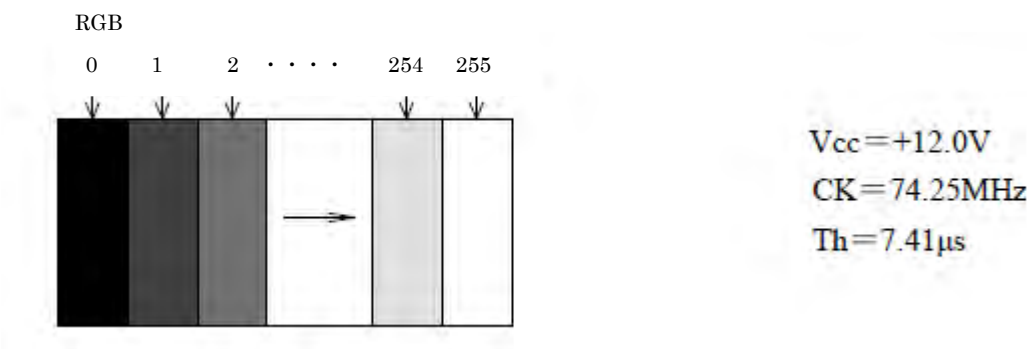

【Note 3】 : SCL, SDA.

【Note 4】 : GSP_out stable time at 2D/3D low to high.

	Symbol	Min.	Typ.	Max.	unit	Remark
2D/3Dinput-GSP_out Stable time	Tgsp_out	100	-	800	ms	Ta=25℃

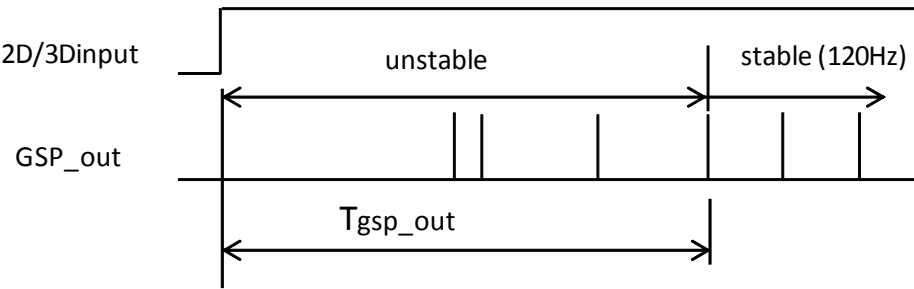

6-2. LED driving for back light

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
LED Current	I_{LED}		120	130	mA	[Note 1]
LED Voltage	V_{LED}		42.9	45.5	V	[Note 2]
LED Current(PWM)	$I_{LED(PWM)}$		260	270	mA	[Note3]
LED Current (PWM) duty	D_{LED}			38	%	[Note4]

[Note1] PIN1-PIN5 (CN3)

LED current (I_{LED}) is the value of each Segment.

*Please decrease LED heat enough when the LED current is increased more than TYP value.

[Note2] $T_a = 25^{\circ}\text{C}$, Measurement after 1h has passed since power supply was turned on.

*The products are sensitive to the static electricity and care shall be fully taken when handling the products.

Particularly in case that an over-voltage which exceeds the Absolute Maximum Rating of the products shall be applied, the overflowed energy may cause damages to, or possibly result in destruction of the products. Please take absolutely secured countermeasures against static electricity and surge when handling the products.

【Note 3】 duty : 1/3、 PWM frequency : 120Hz、

【Note4】 LED Current : 260mA 、 PWM frequency : 120Hz、 Operational Temperature : $50^{\circ}\text{C}(\text{max})$

Panel Surface Temperature : $65^{\circ}\text{C}(\text{max})$.


6-3. LVDS

6-3-1.AC characteristics


$V_{cc}=+11.4V \sim +12.6V$, $T_a=0^{\circ}C \sim +50^{\circ}C$

Parameter	Symbol	Min.	Typ.	Max.	Unit
Input Data Position 0 ($t_{RCIP}=13.48ns$)	t_{RIP1}	-0.25	0.0	+0.25	ns
Input Data Position 1 ($t_{RCIP}=13.48ns$)	t_{RIP0}	$t_{RCIP}/7-0.25$	$t_{RCIP}/7$	$t_{RCIP}/7+0.25$	ns
Input Data Position 2 ($t_{RCIP}=13.48ns$)	t_{RIP6}	$2 t_{RCIP}/7-0.25$	$2 t_{RCIP}/7$	$2 t_{RCIP}/7+0.25$	ns
Input Data Position 3 ($t_{RCIP}=13.48ns$)	t_{RIP5}	$3 t_{RCIP}/7-0.25$	$3 t_{RCIP}/7$	$3 t_{RCIP}/7+0.25$	ns
Input Data Position 4 ($t_{RCIP}=13.48ns$)	t_{RIP4}	$4 t_{RCIP}/7-0.25$	$4 t_{RCIP}/7$	$4 t_{RCIP}/7+0.25$	ns
Input Data Position 5 ($t_{RCIP}=13.48ns$)	t_{RIP3}	$5 t_{RCIP}/7-0.25$	$5 t_{RCIP}/7$	$5 t_{RCIP}/7+0.25$	ns
Input Data Position 6 ($t_{RCIP}=13.48ns$)	t_{RIP2}	$6 t_{RCIP}/7-0.25$	$6 t_{RCIP}/7$	$6 t_{RCIP}/7+0.25$	ns
Phase Lock Loop Set	t_{RPLL}			10	ms
Input Clock Period	t_{RCIP}		13.48		ns

Timing characteristics of input LVDS

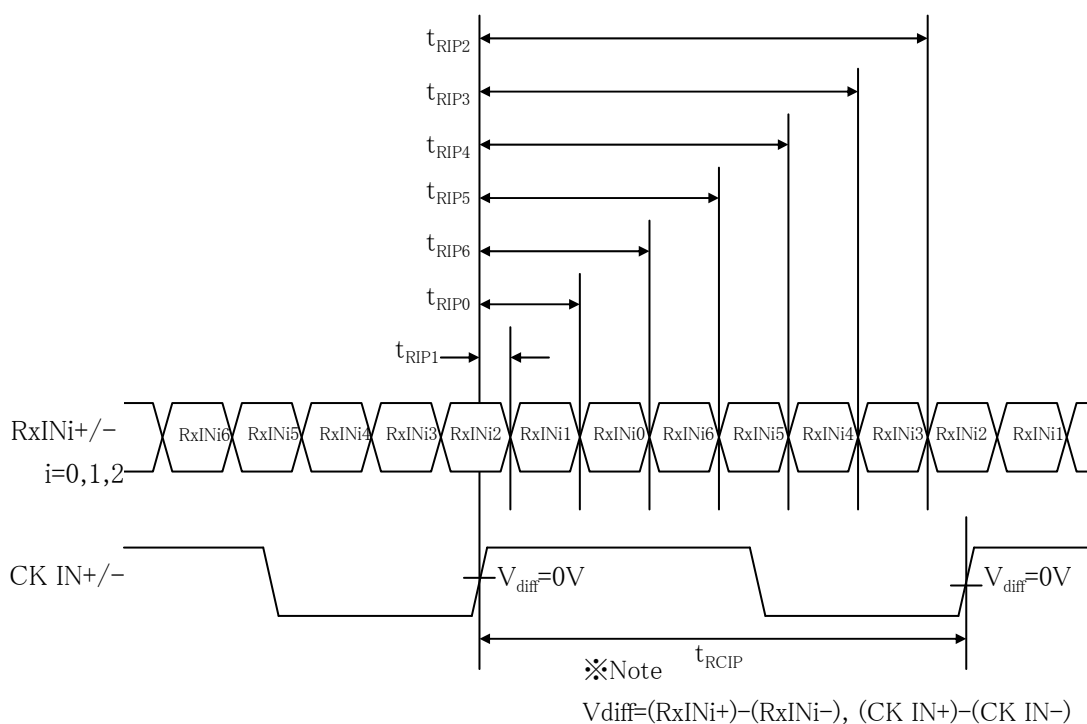

LVDS Phased Locked Loop of set up timing

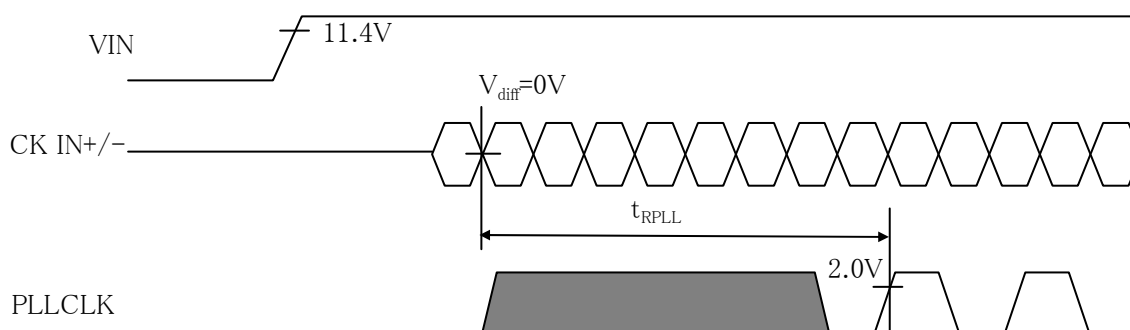

7. Timing characteristics of input signals

Timing diagrams of input signal are shown in Fig.7-1

Parameter		Symbol	Min.	Typ.	Max.	Unit	Remark
Clock	Frequency	1/Tc	60	74.25	80	MHz	
Data enable signal	Horizontal period	TH	515	550	825	CLK	
			6.94	7.41	11.1	μs	
	Horizontal period (High)	THd	480	480	480	CLK	
	Vertical period	TV	1102	1125	1400	Line	
			96.5	120	122.5	Hz	
	Vertical period (High)	TVd	1080	1080	1080	Line	

[Note]-When vertical period is very long, flicker and etc. may occur.

-Please turn off the module after it shows the black screen.

-Please make sure that length of vertical period should become of an integral multiple of horizontal length of period. Otherwise, the screen may not display properly.



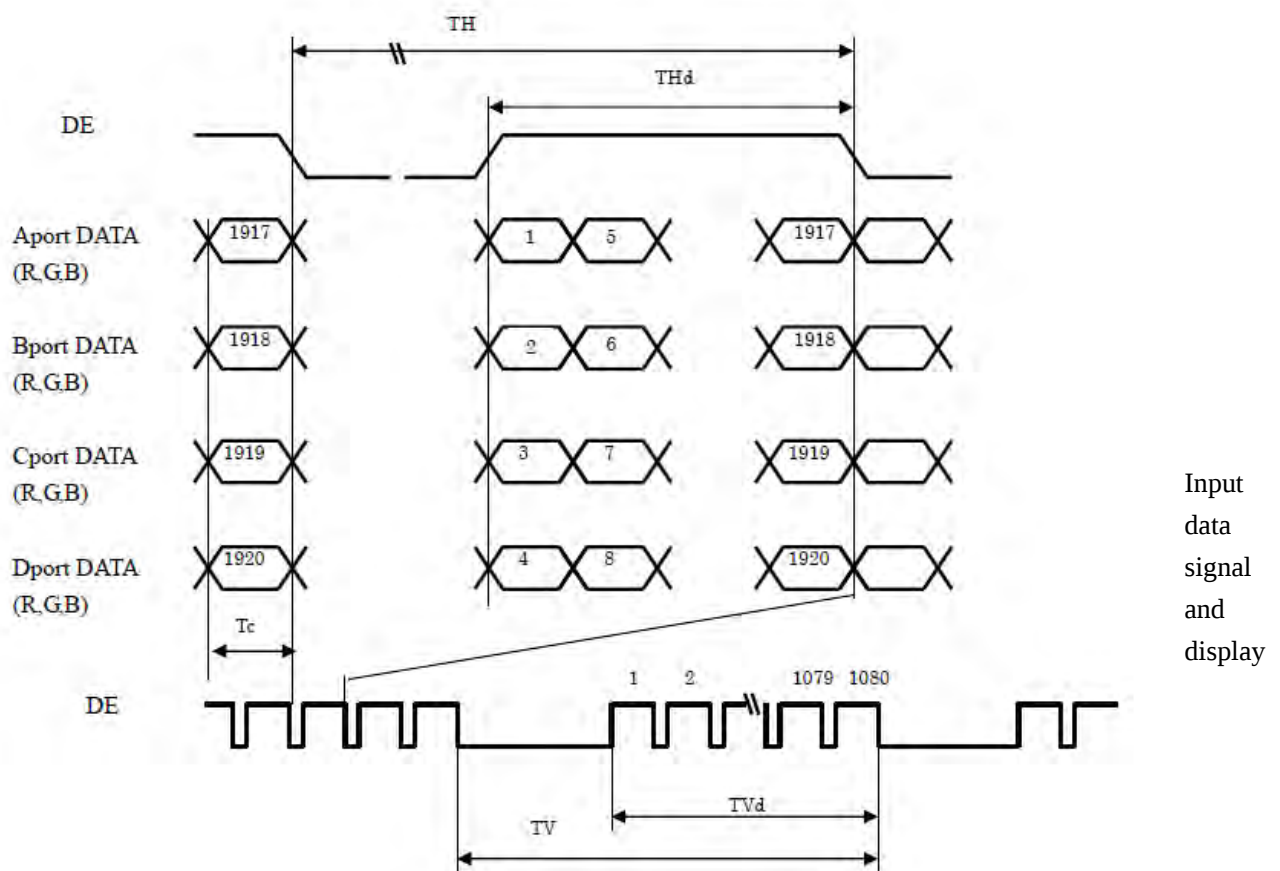


Fig.7-1 Timing characteristics of input signals

position on the screen

R	G	B	R	G	B	R	G	B	R	G	B
(1,1)			(1,2)			(1,3)			(1,4)		

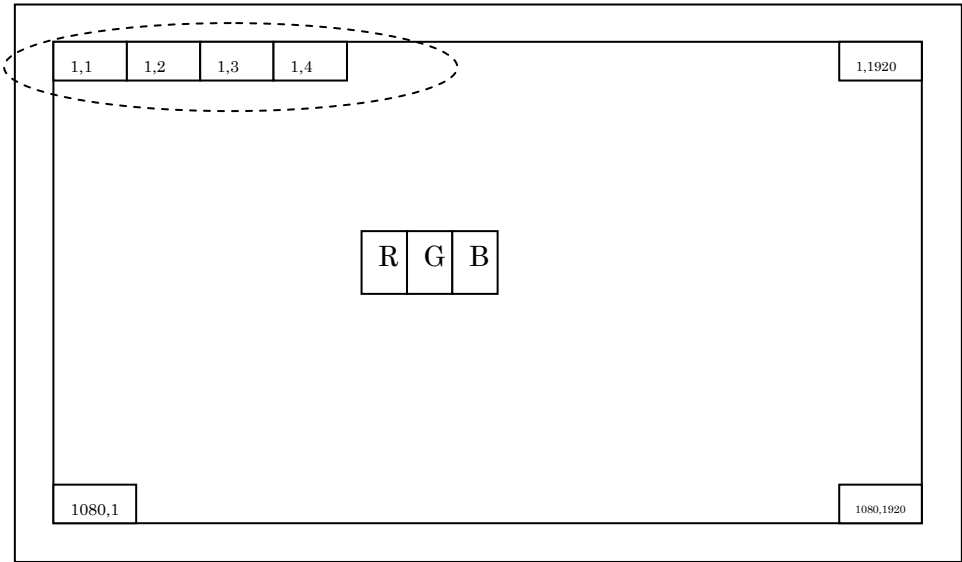

Display position of Dat (V,H)

8. Input Signal, Basic Display Colors and Gray Scale of Each Color (at the case of 8bits)

	Color & Gray scale	Data signal																											
		Gray Scale	R0	R1	R2	R3	R4	R5	R6	R7	G0	G1	G2	G3	G4	G5	G6	G7	B0	B1	B2	B3	B4	B5	B6	B7			
Basic Color	Black	—	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
	Blue	—	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	X	X	1	1	1	1	1	1			
	Green	—	0	0	0	0	0	0	0	0	X	X	1	1	1	1	1	1	0	0	0	0	0	0	0	0			
	Cyan	—	0	0	0	0	0	0	0	0	X	X	1	1	1	1	1	1	X	X	1	1	1	1	1	1			
	Red	—	X	X	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
	Magenta	—	X	X	1	1	1	1	1	1	0	0	0	0	0	0	0	0	X	X	1	1	1	1	1	1			
	Yellow	—	X	X	1	1	1	1	1	1	X	X	1	1	1	1	1	1	0	0	0	0	0	0	0	0			
	White	—	X	X	1	1	1	1	1	1	X	X	1	1	1	1	1	1	X	X	1	1	1	1	1	1			
Gray Scale of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
	↑	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
	Darker	2	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
	↑	↓	↓								↓								↓										
	↓	↓	↓								↓								↓										
	Brighter	250	0	1	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
	↓	251	1	1	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
	Red	252	X	X	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Gray Scale of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
	↑	1	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
	Darker	2	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
	↑	↓	↓								↓								↓										
	↓	↓	↓								↓								↓										
	Brighter	250	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	0	0	0	0	0	0	0	0			
	↓	251	0	0	0	0	0	0	0	0	1	1	0	1	1	1	1	1	0	0	0	0	0	0	0	0			
	Green	252	0	0	0	0	0	0	0	0	X	X	1	1	1	1	1	1	0	0	0	0	0	0	0	0			
Gray Scale of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
	↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0			
	Darker	2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0			
	↑	↓	↓								↓								↓										
	↓	↓	↓								↓								↓										
	Brighter	250	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1			
	↓	251	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0	1	1	1	1	1			
	Blue	252	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	X	X	1	1	1	1	1	1			

0 : Low level voltage, 1 : High level voltage.

Each basic color can be displayed in 253 gray scales with 8 bit data signals. According to the combination of total 24 bit data signals, the 16-million-color display can be achieved on the screen. (X: don't care)

9. Optical characteristics

The optical measurement at the time of driving on the following conditions is shown in the following table.

Ta=25℃

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing angle range	Horizontal	θ_{21} θ_{22}	$CR \geq 10$	70	88	—	Deg	【Note1,2】
	Vertical	θ_{11} θ_{12}		70	88	—	Deg	Fig9-1,9-3
Contrast ratio		CR		3000	5000	—		【Note2】 Fig9-2 $\triangle 2$
Response Time (G to G)		τ_{drv}	$\theta = 0^{\circ}$	—	4	—	ms	【Note3,4,5】 Fig9-1,9-2
Chromaticity of white		X		0.261	0.296	0.331	—	ILED=120 mA The value of each bar. 【Note4】 Fig9-1,9-2
		Y		0.294	0.329	0.364	—	
Chromaticity of red		X		0.607	0.637	0.667	—	
		Y		0.324	0.354	0.384	—	
Chromaticity of green		X		0.290	0.320	0.350	—	
		Y		0.596	0.626	0.656	—	
Chromaticity of blue		X		0.120	0.150	0.180	—	
		Y		0.049	0.079	0.109	—	
Luminance uniformity		δ_w		—	1.25	1.43	—	【Note6】 Fig9-2 (All white)
Luminance(DC)			400	450		cd/m ²	【Note4】 Fig9-2	
Luminance(PWM)			250	300		cd/m ²	【Note4】 Fig9-2 【Note7】	

*The measurement shall be executed 30 minutes after lighting at rating.

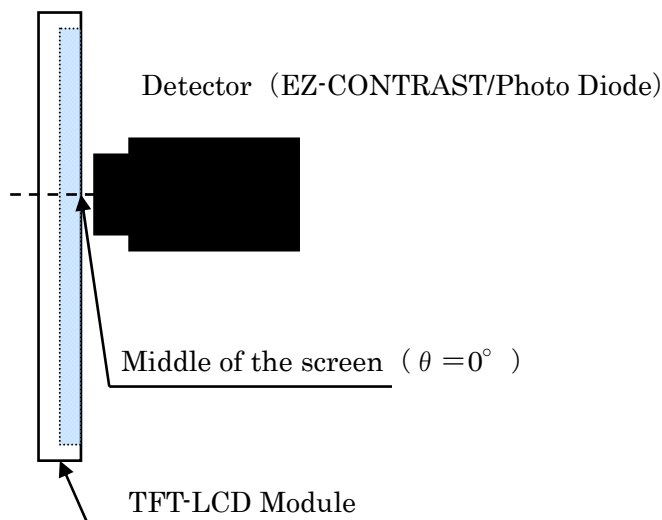


Fig.9-1 Measurement of viewing angle range and Response time.

Viewing angle range: EZ-CONTRAST
(Response time: Photo diode)

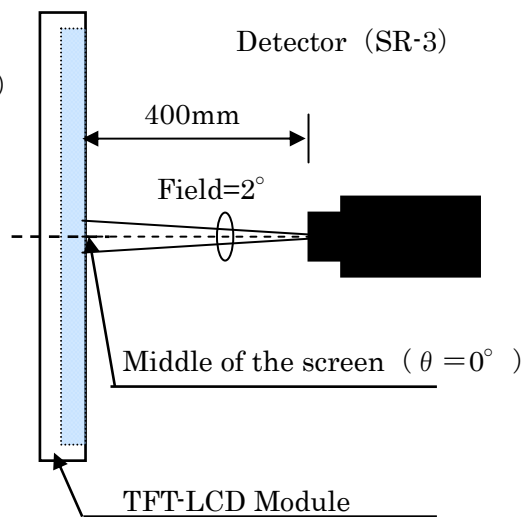


Fig.9-2 Measurement of luminance and chromaticity and Contrast.

【Note 1】 Definitions of viewing angle range

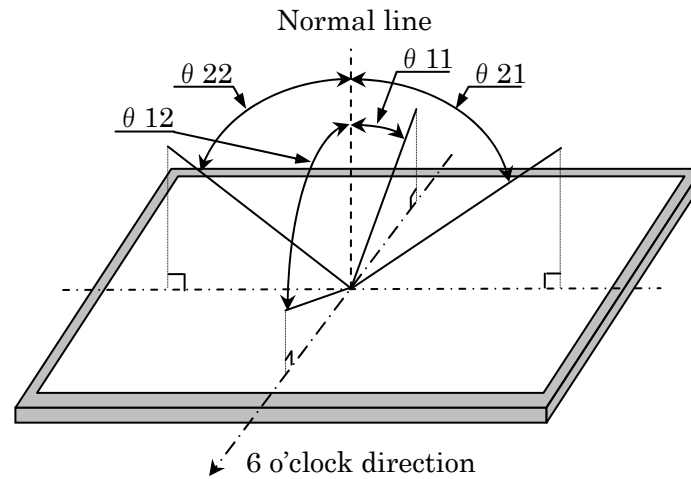


Fig. 9-3 Definitions of viewing angle range

【Note 2】 Definition of contrast ratio :

The contrast ratio is defined as the following.

$$\text{Contrast Ratio (CR)} = \frac{\text{Luminance(brightness) with all pixels white}}{\text{Luminance(brightness) with all pixels black}}$$

【Note 3】 Definition of response time

The response time of (τ_d and τ_r) is defined as the following figure.9-4 and shall be measured by switching the input signal for “any level of gray (0, 64, 128, 192, 255)” and “any level of (0, 64, 128, 192, 255)”.

	0	64	128	192	255
0		τ_{r0-64}	τ_{r0-128}	τ_{r0-192}	τ_{r0-255}
64	τ_{d64-0}		$\tau_{r64-128}$	$\tau_{r64-192}$	$\tau_{r64-255}$
128	τ_{d128-0}	$\tau_{d128-64}$		$\tau_{r128-192}$	$\tau_{r128-255}$
192	τ_{d192-0}	$\tau_{d192-64}$	$\tau_{d192-128}$		$\tau_{r192-255}$
255	τ_{d255-0}	$\tau_{d255-64}$	$\tau_{d255-128}$	$\tau_{d255-192}$	

$t^*:x-y$...response time from level of gray(x) to level of gray(y)

$$\tau_r = \Sigma(\tau_{r:x-y})/10 \quad \tau_d = \Sigma(\tau_{d:x-y})/10 \quad \tau_{drv} = (\tau_r + \tau_d)/2$$

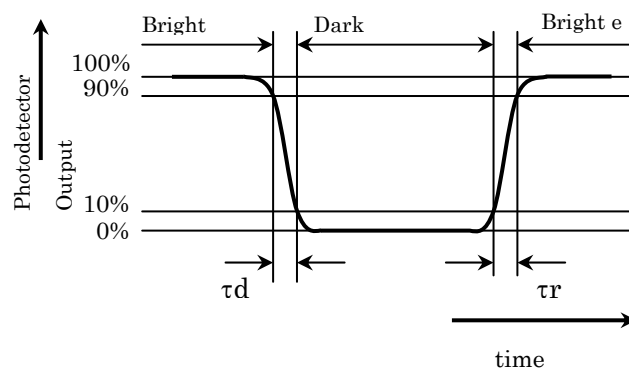


Fig. 9-4 Definitions of response time


【Note 4】 This shall be measured at center of the screen.

【Note 5】 This value is valid when O/S driving is used at typical input time value.

【Note 6】 Definition of Luminance uniformity ;

Luminance uniformity is defined as the following with nine measurements.(P0~P8)

$$\delta_w = \frac{\text{maximum Luminance of nine points(brightness)}}{\text{minimum Luminance of nine points(brightness)}}$$

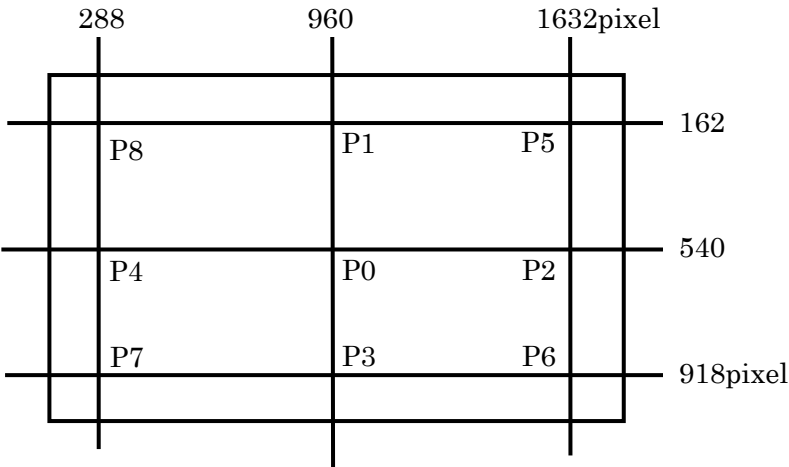

【Note 7】 LED Current : 260mA、 duty : 1/3、 PWM frequency : 120Hz、 LED Voltage : 42.9V

10. Handling Precautions of the module

- a) Be sure to turn off the power supply when inserting or disconnecting the cable.
- b) Voltage difference generated by this switching, ΔV_{LED} , may affect a sound output, etc. when the power supply is shared between the LED PWB and its surrounding circuit. So, separate the power supply of the LED PWB with the one of its surrounding circuit.
- c) Be sure to design the cabinet so that the module can be installed without any extra stress such as warp or twist.
- d) Since the front polarizer is easily damaged, pay attention not to scratch it.
- e) Since long contact with water may cause discoloration or spots, wipe off water drop immediately.
- f) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- g) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface. Handle with care.
- h) Since CMOS LSI is used in this module, take care of static electricity and take the human earth into consideration when handling.
- i) The module has some printed circuit boards (PCBs) on the back side, take care to keep them from any stress or pressure when handling or installing the module; otherwise some of electronic parts on the PCBs may be damaged.
- j) Observe all other precautionary requirements in handling components.
- k) When some pressure is added onto the module from rear side constantly, it causes display non-uniformity issue, functional defect, etc... So, please avoid such design.
- l) When giving a touch to the panel at power on supply, it may cause some kinds of degradation. In that case, once turn off the power supply, and turn on after several seconds again, and that is disappear.
- m) When handling LCD modules and assembling them into cabinets, please be noted that long-term storage in the environment of oxidization or deoxidization gas and the use of such materials as reagent, solvent, adhesive, resin, etc. which generate these gasses, may cause corrosion and discoloration of the LCD modules.
- n) This LCD module is designed to prevent dust from entering into it. However, there would be a possibility to have a bad effect on display performance in case of having dust inside of LCD module. Therefore, please ensure to design your product to keep dust away around LCD module.
- o) Make sure that the LCD module is operated within specified temperature and humidity.
Measures against dust, water, vibration, and heat dissipation structure, etc. are required at the cabinet or equipment side.
Avoid combination of background and image with large different luminance.
Please consider the design and operating environment.
- p) Ultra-violet ray filter is necessary in outdoor environment.
- q) Operation for 24 hours a day is NOT recommended.
- r) When the module is turned on, you might hear cracking noises coming from the module until it warms up. Similarly, this phenomenon might occur when the module is turned off until it cools down.
This phenomenon occurs by a large amount of heat generation due to a big module.
Therefore, it is not a defect.
- s) Image retention may occur if same fixed pattern is displayed for a long time.
In some cases, it may not disappear. It is recommended to use moving picture periodically.
After long-term static display, periodical power-off or screen saver is needed. For screen saver, moving picture or black pattern is strongly recommended.

1 1. Packing

11-1. Packing form

- a) Piling number of cartons : 3 Maximum
- b) Packing quantity in one carton : 8 pcs
- c) Carton outer size : 671 mm(W)× 374 mm(D)× 421 mm(H) Typ.
- d) Total mass of one carton filled with full modules(8 pcs) : 25 kg Typ.
- e) Country of origin / area : China

*Packing Form is shown in Fig.11-1

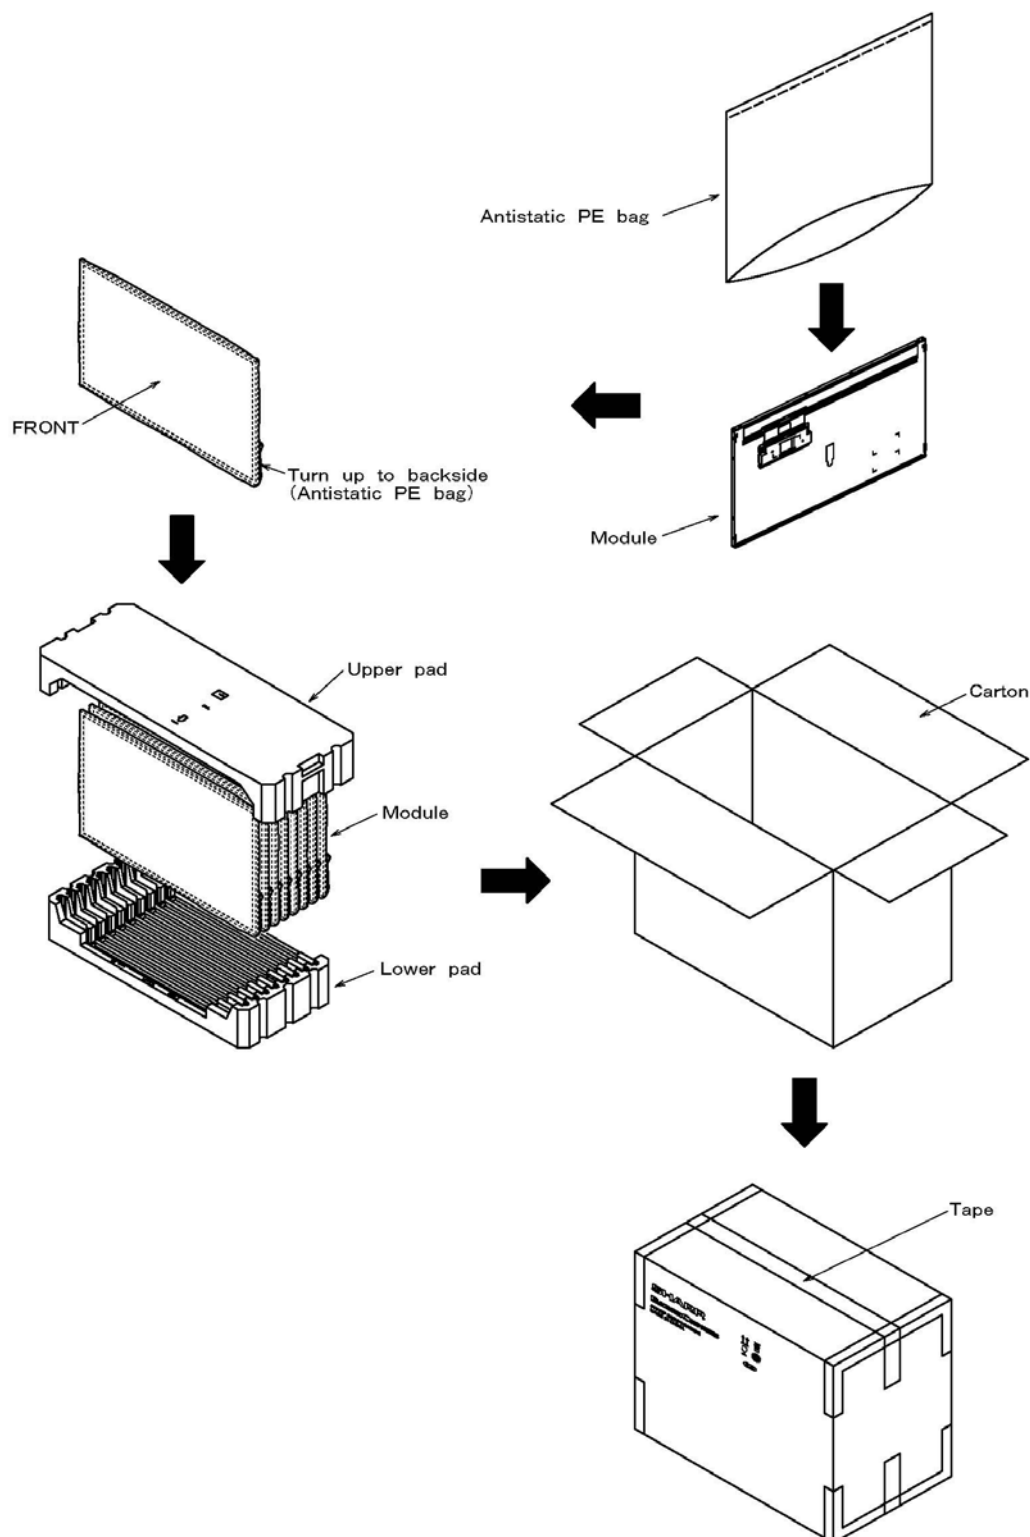


Fig.11-1 Packing form

11-2. How to take out the EPS Upper pad



Both hands are inserted in the concave portion of the right-and-left side central part of EPS Upper pad.



Insert to the back of concave portion, and pinches and raises the lower part of concave portion.

(Refer to the following figure.)



(side view)



Pinched and raised state.

1 2. Reliability test item


No.	Test item	Condition
1	High temperature storage test	Ta =60 °C 240h
2	Low temperature storage test	Ta =-25 °C 240h
3	High temperature and high humidity operation test	Ta=40°C ; 90%RH 240h (No condensation)
4	High temperature operation test	Ta=50°C 240h
5	Low temperature operation test	Ta= 0°C 240h
6	Vibration test* (non-operation)	Frequency: 10~57Hz/Vibration width (one side): 0.075mm : 58~500Hz/Acceleration: 9.8 m/s ² Sweep time: 11 minutes Test period: 3 hours (1h for each direction of X, Y, Z)
7	Shock test* (non-operation)	Maximum acceleration: 294m/s ² Pulse width:11ms, sinusoidal half wave Direction: +/-X, Y, Z once for each direction.
8	ESD	At the following conditions, it is a thing without incorrect operation and destruction. (1)Non-operation: Contact electric discharge +/-10kV Non-contact electric discharge +/-20kV (2)Operation Contact electric discharge +/-8kV Non-contact electric discharge +/-15kV Conditions: 150Pf, 330ohm

【Result evaluation criteria】


Under the display quality test condition with the normal operation state, there shall be no change, which may affect a practical display function

13. Others

13-1. Serial No. Label

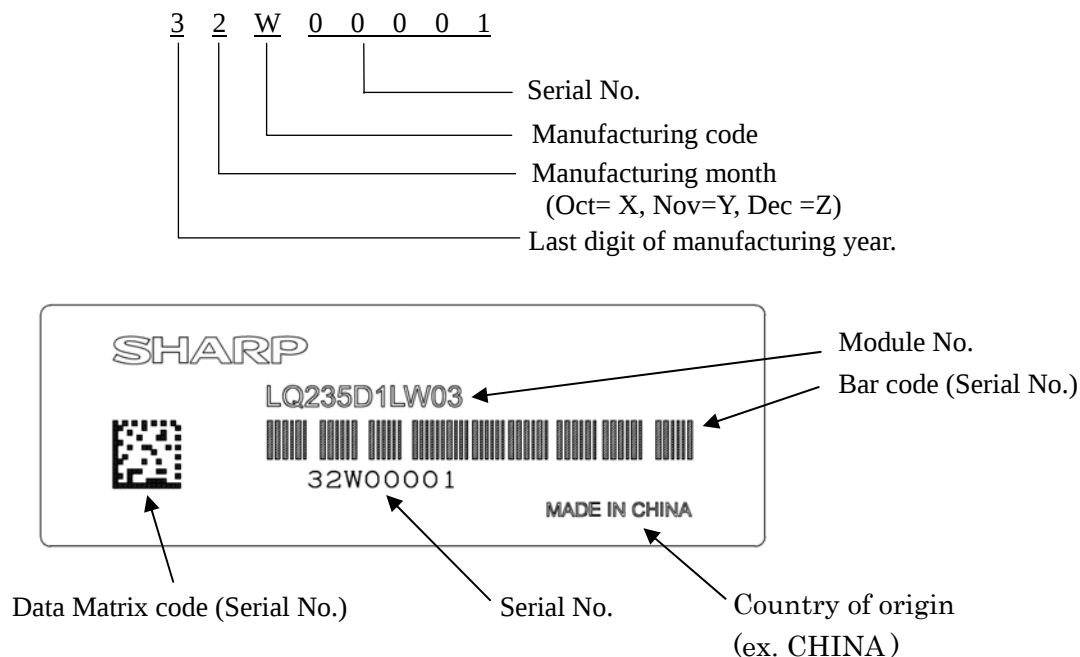

13-2. Carton Label

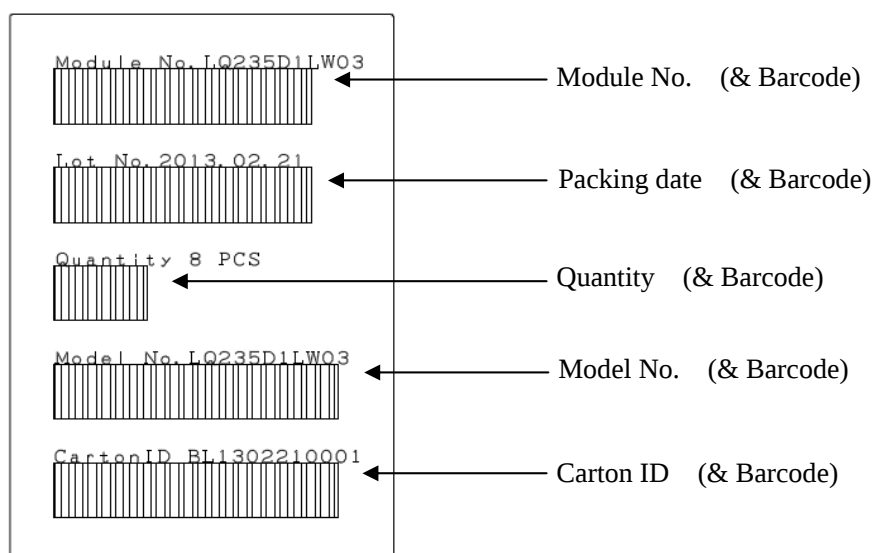

13-3. The chemical ozone depleting substance is not used.

13-4. If any problem occurs in relation to the description of this specification, it shall be resolved through discussion with spirit of cooperation.

The figure left below (cardboard box recycling symbol mark) is written to the packing box.

And, the figure right below is written to the packing box of the settlement for the RoHS restriction.

※ R.C. (RoHS Compliance) means it suits the RoHS directive.

This LCD module is compliant with RoHS Directive.



Cardboard box •
Recycling symbol mark



Mark for RoHS directive

1 4 . Range of storage temperature and humidity environmental condition

Temperature 0°C to 40°C

Relative humidity 90% and below

Reference condition

 :20°C to 35°C 85%RH or less(summer)

 : 5°C to 15°C 85%RH or less(winter)

- the total storage time (40°C,90%RH) : 240h or less

Direct sunlight

Please keep it in the state of wrapping or the darkroom so that direct sunshine should not strike directly into the product.

Ambient atmosphere

Please do not keep it in the place with the danger of the generation of the causticity gas and the volatile solvent.

Dewy condensation prevention

- Please do not put the wrapping box directly on the floor, and keep it on palette or rack to avoid dewy condensation.

Moreover, please put it in a constant direction correctly to improve ventilation under the palette.

- Please separate from the wall in the storage warehouse and keep it.
- Please pay attention that ventilation is improved, and set up the ventilator etc. in the warehouse.
- Please manage so that there is no rapid temperature change more than natural environment.

Storage period

Please keep within one year under the above-mentioned storage condition.

LCD Specification

LCD Group



NORTH AMERICA

Sharp Microelectronics of the Americas
5700 NW Pacific Rim Blvd.
Camas, WA 98607, U.S.A.
Phone: (1) 360-834-2500
Fax: (1) 360-834-8903
www.sharpsma.com

TAIWAN

Sharp Electronic Components
(Taiwan) Corporation
8F-A, No. 16, Sec. 4, Nanking E. Rd.
Taipei, Taiwan, Republic of China
Phone: (886) 2-2577-7341
Fax: (886) 2-2577-7326/2-2577-7328

CHINA

Sharp Microelectronics of China
(Shanghai) Co., Ltd.
28 Xin Jin Qiao Road King Tower 16F
Pudong Shanghai, 201206 P.R. China
Phone: (86) 21-5854-7710/21-5834-6056
Fax: (86) 21-5854-4340/21-5834-6057
Head Office:
No. 360, Bashen Road,
Xin Development Bldg. 22
Waigaoqiao Free Trade Zone Shanghai
200131 P.R. China
Email: smc@china.global.sharp.co.jp

EUROPE

SHARP Devices Europe GmbH:
Landsberger Straße 398
Munich 81241
Germany
Phone: +49-89-5468-420
Fax: +49-89-5468-4250

www.sharpsde.com

SINGAPORE

Sharp Electronics (Singapore) PTE., Ltd.
438A, Alexandra Road, #05-01/02
Alexandra Technopark,
Singapore 119967
Phone: (65) 271-3566
Fax: (65) 271-3855

KOREA

Sharp Electronic Components
(Korea) Corporation
RM 501 Geosung B/D, 541
Dohwa-dong, Mapo-ku
Seoul 121-701, Korea
Phone: (82) 2-711-5813 ~ 8
Fax: (82) 2-711-5819

JAPAN

Sharp Corporation
Electronic Components & Devices
22-22 Nagaïke-cho, Abeno-Ku
Osaka 545-8522, Japan
Phone: (81) 6-6621-1221
Fax: (81) 6117-725300/6117-725301
www.sharp-world.com

HONG KONG

Sharp-Roxy (Hong Kong) Ltd.
3rd Business Division,
17/F, Admiralty Centre, Tower 1
18 Harcourt Road, Hong Kong
Phone: (852) 28229311
Fax: (852) 28660779
www.sharp.com.hk
Shenzhen Representative Office:
Room 13B1, Tower C,
Electronics Science & Technology Building
Shen Nan Zhong Road
Shenzhen, P.R. China
Phone: (86) 755-3273731
Fax: (86) 755-3273735

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Suggested applications (if any) are for standard use; See Important Restrictions for limitations on special applications. See Limited Warranty for SHARP's product warranty. The Limited Warranty is in lieu, and exclusive of, all other warranties, express or implied. ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR USE AND FITNESS FOR A PARTICULAR PURPOSE, ARE SPECIFICALLY EXCLUDED. In no event will SHARP be liable, or responsible in any way, for any incidental or consequential economic or property damage.