


FROM	TERM.	WIRE COLOR	TO	TERM.
P1-1	50079-8000	RED	P2-4	CI14T011PE0
P1-2	50079-8000	RED	P2-5	CI14T011PE0
P1-5	50079-8000	BLACK	P2-1	CI14T011PE0
P1-6	50079-8000	BLACK	P2-2	CI14T011PE0
P1-7	50079-8000	BLACK	P2-7	CI14T011PE0
P1-8	50079-8000	BLACK	P2-8	CI14T011PE0

This connector connects to output
connector of LED Driver

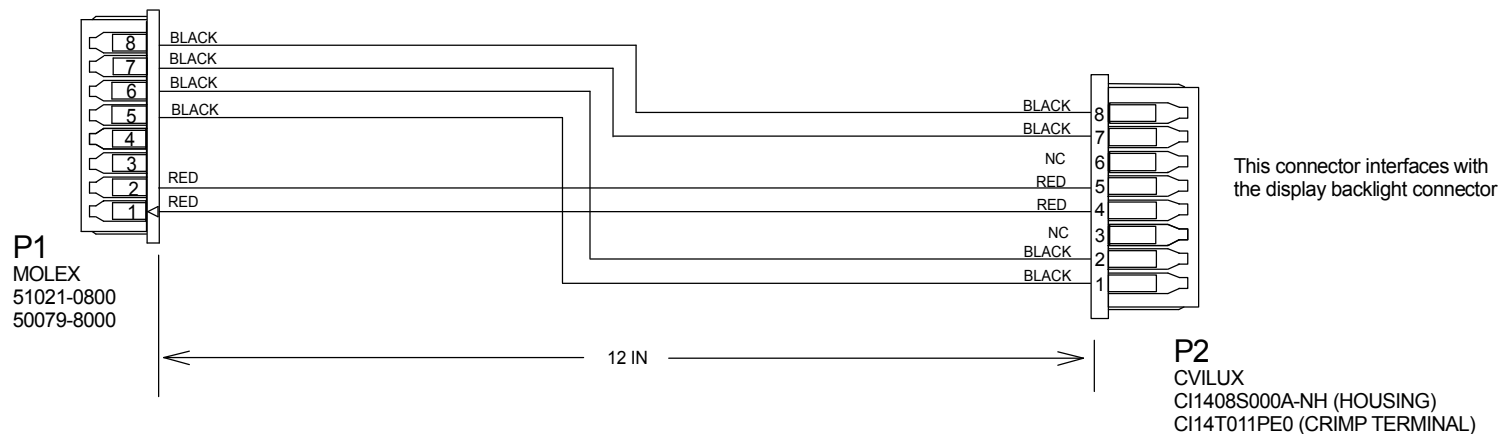

BOM				
REF.	QTY	MANUFACTURER	P/N	DESCRIPTION
P1	1	MOLEX	51021-0800	CONNECTOR HOUSING, 8 CIRCUIT
P1	6	MOLEX	50079-8000	CONTACT SOCKET (NOT SHOWN)
P2	1	CVILUX	C1408S000A-NH	CONNECTOR HOUSING, 8 CIRCUIT
P2	6	CVILUX	CI14T011PE0	CRIMP TERMINAL, 28 - 32 AWG (NOT SHOWN)
WIRE	AR	ALPHA WIRE OR EQUIVALENT	1852	WIRE, 28 (7/36) AWG, PVC 105C, MAX OD OF INSULATION = 0.037 INCHES

Cable Assembly, Output, RoHS Compliant
Connects ACI-2730 Driver to
InnoLux M315DJJ-K30 31.5" (X-4244A)

LABELING INSTRUCTIONS

DRAWING NOT TO SCALE

SHEET 1 OF 1, 01/26/16

SD-0550

APPLIED CONCEPTS, INC.

27-R0243