


REF.	LOC.	TERM.	WIRE COLOR
W1	P1-1	SPH-002T-P0.5L	RED
W2	P1-1	SPH-002T-P0.5L	RED
W3	P1-2	SPH-002T-P0.5L	BLACK
W4	P1-2	SPH-002T-P0.5L	BLACK
W5	P1-5	SPH-002T-P0.5L	WHITE
W6	P1-5	SPH-002T-P0.5L	WHITE

EXPOSED WIRE STRANDS TO BE TWISTED AND TINNED (X6)

This connector interfaces with
Customer Driver CN5

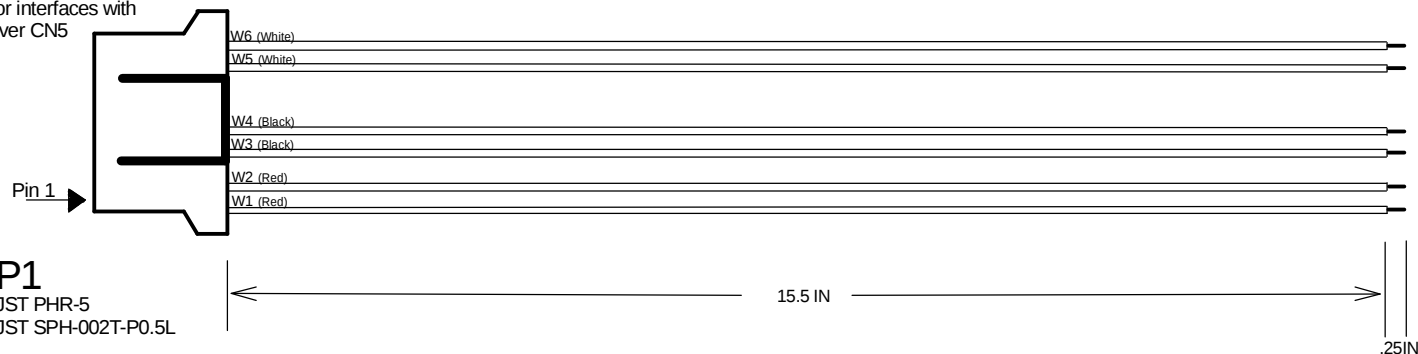

BOM

REF.	QTY	MANUFACTURER	P/N	DESCRIPTION
P1	1	JST	PHR-5	CONNECTOR HOUSING
P1	3	JST	SPH-002T-P0.5L	TERMINAL (NOT SHOWN)
W1	AR	THERMAX	M16878/4-BCB-RED	WIRE, RED, 28 AWG, TEFLON
W2	AR	THERMAX	M16878/4-BCB-RED	WIRE, RED, 28 AWG, TEFLON
W3	AR	THERMAX	M16878/4-BCB-WHITE	WIRE, BLACK, 28 AWG, TEFLON
W4	AR	THERMAX	M16878/4-BCB-WHITE	WIRE, BLACK, 28 AWG, TEFLON
W5	AR	THERMAX	M16878/4-BCB-BLACK	WIRE, WHITE, 28 AWG, TEFLON
W6	AR	THERMAX	M16878/4-BCB-BLACK	WIRE, WHITE, 28 AWG, TEFLON

Cable Assembly, Output, RoHS Compliant

DRAWING NOT TO SCALE

SHEET 1 OF 1, 07/08/16

APPLIED CONCEPTS, INC.

27-R0253