


REVISION	CHANGE DATE	CHANGE DESCRIPTION
A	11/10/2016	Updated Wire Configuration

FROM	TERMINATION	WIRE	TO	TERMINATION
P1-1	50079-8000	RED	P2-2	SXH-001T-P0.6 (BOTH RED WIRES WILL SHARE THIS TERMINATION)
P1-2	50079-8000	RED	P2-2	SXH-001T-P0.6 (BOTH RED WIRES WILL SHARE THIS TERMINATION)
P1-3	50079-8000	BLACK	P2-1	SXH-001T-P0.6 (BOTH BLACK WIRES WILL SHARE THIS TERMINATION)
P1-4	50079-8000	BLACK	P2-1	SXH-001T-P0.6 (BOTH BLACK WIRES WILL SHARE THIS TERMINATION)
P1-5	50079-8000	WHITE		FLYING LEADS
P1-6	50079-8000	BLUE		FLYING LEADS
P1-8	50079-8000	YELLOW		FLYING LEADS

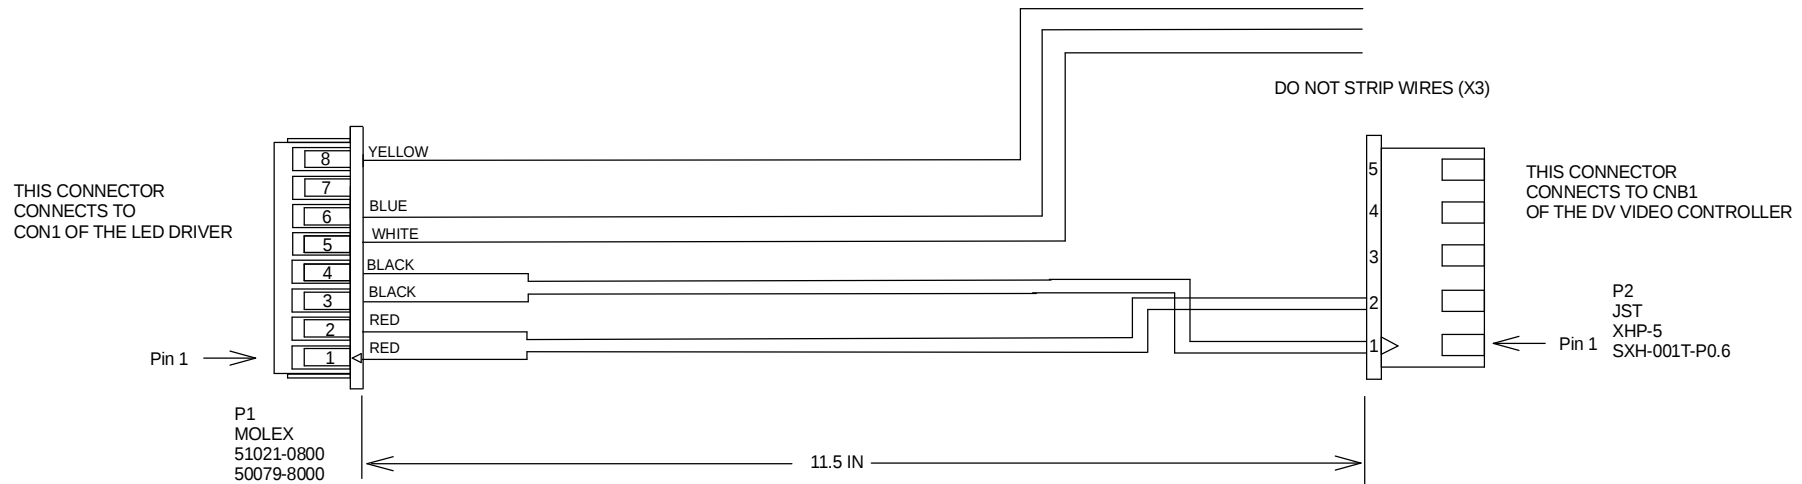

BOM

REF.	QTY	MANUFACTURER	P/N	DESCRIPTION
P1	1	MOLEX	51021-0800	CONNECTOR HOUSING, 8 CIRCUIT
P1	7	MOLEX	50079-8000	CONTACT (NOT SHOWN)
P2	1	JST	XHP-5	CONNECTOR HOUSING, 5 CIRCUIT
P2	4	JST	SXH-001T-P0.6	CONTACT (NOT SHOWN)
WIRE, RED	AR	ALPHA	1853 / 7 - RED	WIRE, 26 (7/34) AWG TC STRANDED, 105C RATED
WIRE, BLACK	AR	ALPHA	1853 / 7 - BLACK	WIRE, 26 (7/34) AWG TC STRANDED, 105C RATED
WIRE, WHITE	AR	ALPHA	1853 / 7 - WHITE	WIRE, 26 (7/34) AWG TC STRANDED, 105C RATED
WIRE, BLUE	AR	ALPHA	1853 / 7 - BLUE	WIRE, 26 (7/34) AWG TC STRANDED, 105C RATED
WIRE, YELLOW	AR	ALPHA	1853 / 7 - YELLOW	WIRE, 26 (7/34) AWG TC STRANDED, 105C RATED

Cable Assembly, RoHS Compliant
This cable assembly interfaces one ID2
with the DV video controller

LABEL INSTRUCTIONS

DRAWING NOT TO SCALE

SHEET 1 OF 1, 11/10/16

SD-0550

APPLIED CONCEPTS, INC.

27-R0256