


FROM	TERM.	TO	TERM.	WIRE COLOR
P1-1	SSH-003T-P0.2-H	P2-1	SSH-003T-P0.2-H	RED
P1-2	SSH-003T-P0.2-H	P2-2	SSH-003T-P0.2-H	BLACK
P1-3	SSH-003T-P0.2-H	P2-3	SSH-003T-P0.2-H	RED
P1-4	SSH-003T-P0.2-H	P2-4	SSH-003T-P0.2-H	BLACK
P1-5	SSH-003T-P0.2-H	P2-5	SSH-003T-P0.2-H	RED
P1-6	SSH-003T-P0.2-H	P2-6	SSH-003T-P0.2-H	BLACK
P1-7	SSH-003T-P0.2-H	P2-7	SSH-003T-P0.2-H	RED
P1-8	SSH-003T-P0.2-H	P2-8	SSH-003T-P0.2-H	BLACK
P1-9	SSH-003T-P0.2-H	P2-9	SSH-003T-P0.2-H	RED
P1-10	SSH-003T-P0.2-H	P2-10	SSH-003T-P0.2-H	BLACK
P1-11	SSH-003T-P0.2-H	P2-11	SSH-003T-P0.2-H	RED
P1-12	SSH-003T-P0.2-H	P2-12	SSH-003T-P0.2-H	BLACK

THIS CONNECTOR
CONNECTS TO THE
BACKLIGHT
DISPLAY

P1
JST SHR-12V-S
SSH-003T-P0.2-H

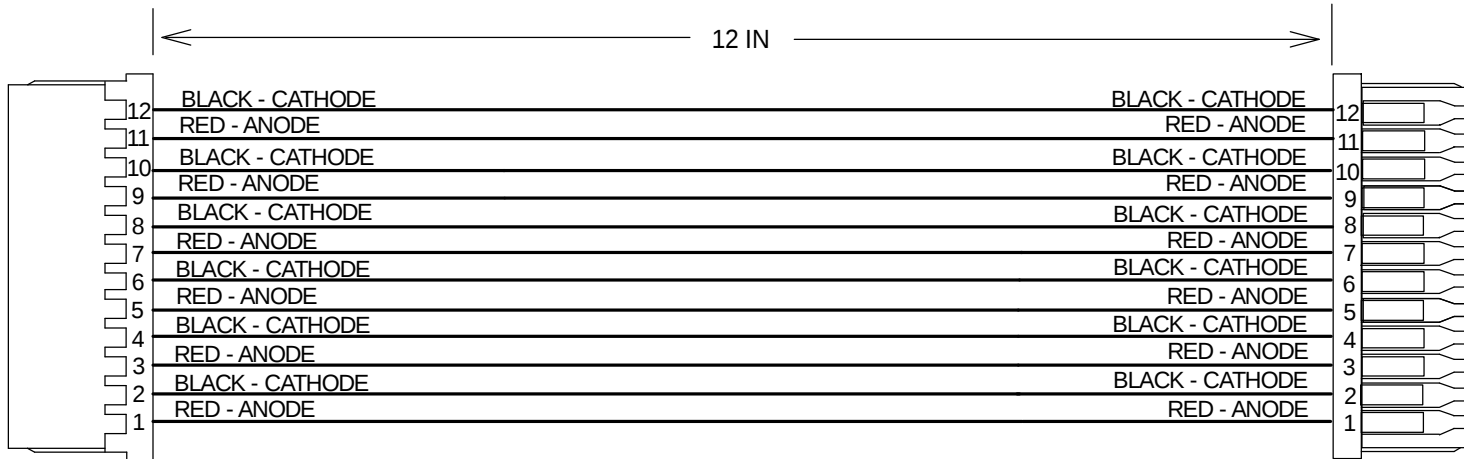

THIS CONNECTOR
CONNECTS TO
NLT DROP-IN LED
DRIVER

P2
JSTSHR-12V-S
SSH-003T-P0.2-H

BOM

REF.	QTY	MANUFACTURER	P/N	DESCRIPTION
P1	1	JST	SHR-12V-S, -B	CONNECTOR HOUSING, 12 CIRCUIT
P1	12	JST	SSH-003T-P0.2-H	CONTACT SOCKET (NOT SHOWN)
P2	1	JST	SHR-12V-S, -B	CONNECTOR HOUSING, 12 CIRCUIT
P3	12	JST	SSH-003T-P0.2-H	CONTACT SOCKET (NOT SHOWN)
WIRE, RED	AR	ALPHA WIRE OR EQUIVALENT	2842/7 RED	WIRE, RED, 28 (7/36) AWG, 105C
WIRE, BLACK	AR	ALPHA WIRE OR EQUIVALENT	2842/7 BLACK	WIRE, BLACK, 28 (7/36) AWG, 105C

SHEET 1 OF 1, 09/09/16

Cable Assembly, RoHS Compliant, used with
NLT Drop-In, 12 Position to 12 Position

LABEL INSTRUCTIONS

DRAWING NOT TO SCALE

SD-0550

APPLIED CONCEPTS, INC.

27-R0267