



397 Route 281
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

ACI-3118

PRODUCT DATA SHEET

03/16/2021

I-DRIVE 3, 15.0 WATT LED DRIVER (Single Channel 120V, 0-125mA)

GENERAL DESCRIPTION

The ACI-3118 represents the 3rd generation of I-Drive technology used for powering LED backlights.

Operating as a true constant current source capable of driving series connected LEDs with a forward drop of up to 120V, and operates over an input voltage range of +9V to +18V.

Simple to connect and operate, this driver solution is capable of providing precise control to support dimming applications with a minimum of 3000:1.

This unit features enable and intensity control inputs, and is designed to work with the Digital View LCD Controller and Button Board (See page 3 for more information).

MECHANICAL/ENVIRONMENTAL

Weight = 20.5 grams

Altitude = 35,000 ft max.

Humidity < 95% non-condensing

Size (L x W x H) = 2.35 IN x 1.43 IN x 0.385 IN

PCB thickness = 0.062 IN


Mounting Holes = 0.128 IN diameter (X2)

Input Power & Control Connector = CON1

LED Output Connector = CON2

PCB Conformally Coated with Humiseal 1B73

RoHS Compliant

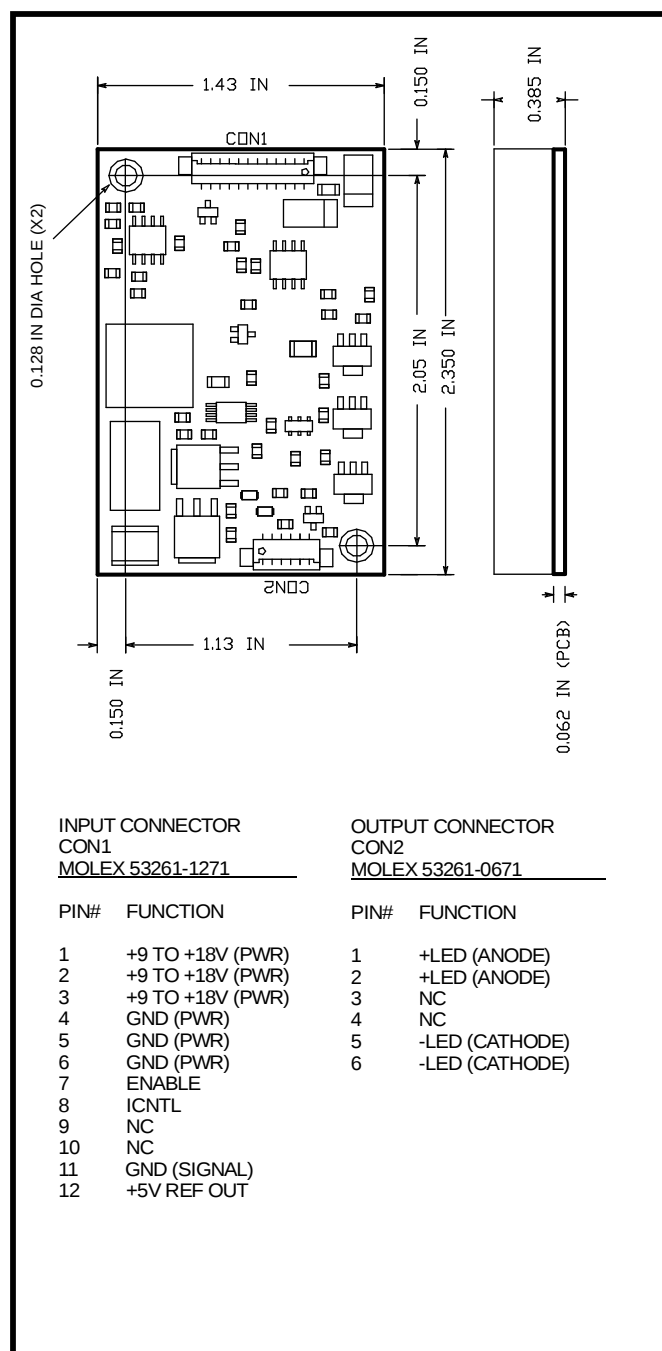

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
Vin	Supply Voltage (Referenced to Ground)	-0.7 to 20	Vdc
Vip	Voltage applied to any Input Pin (Referenced to Ground)	-0.7 to 5.7	Vdc
Iop	Current sourced or sinked from any Output Control Pin	+/- 10	mAdc
Pin	Input Power (DC Input Voltage x DC Input Current)	19.0	W
Top	Operating Temperature (Still air ambient around Driver)	-30 to +70	°C
Tstg	Storage Temperature	-40 to +105	°C

*Maximum Ratings are those values beyond which damage to the driver may occur


RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
Vin	Supply Voltage (Referenced to Ground)	9.0	18.0	Vdc
Vf	Series Connected Cumulative LED Forward-Drop Voltage	36	120	Vdc
Icctl	LED Intensity Control Voltage	0.1	4.6	Vdc

ELECTRICAL CHARACTERISTICS

Vin = +12V, Vf = 120Vdc, Icctl = +0.1V, Enable = +5V unless otherwise specified

Symbol	Parameter	Test Conditions	Min	Nom	Max	Unit
OCV	Open Circuit Voltage	No Load	133	140	147	Vdc
Iout	Output Current		119	125	131	mAdc
Iadj	Nominal Output Current Adjust Range	Icctl(Pin 8)= +4.6V to +0.1V	0		125	mAdc
ENoff	Enable Control, Unit Off				0.5	Vdc
ENon	Enable Control, Unit ON		2.0			Vdc
+5Vref	+5V Output Reference Voltage	1K Ohm Load to Ground (Pin 12)	4.75	5.0	5.25	Vdc
Iin	Input Current Draw			1.4		Adc
Iind	Input Current Draw (Disabled)	Enable (Pin 7) = 0V			0.06	Adc
Eff	Electrical Efficiency		87			%

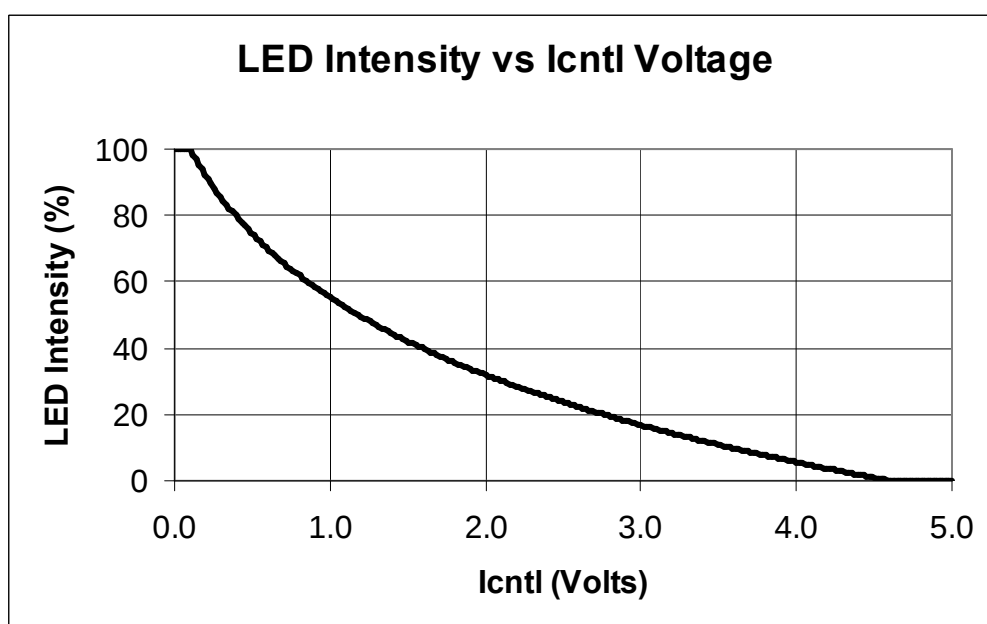

NOTE: The intensity response curve is designed to be compatible with the Digital View LCD Controller and Button Board.

Digital View LCD Controllers and Jumper Settings

LCD Controller	Jumper Settings
ALR-1400	(JB2 = 2-3) (JB3 = 1-2) (JP2 = 1-2)
ALR-1920	(JB2 = 2-3) (JB3 = 1-2) (JB5 = 1-2)
DVS-1600	(JB1 = 2-3) (JB2 = 2-3) (JB3 = 1-2) (JB5 = 1-2)
SP-1600	(JB2 = 2-3) (JB3 = 1-2) (JP3 = 1-2)
SVH-1920	(JB2 = 2-3) (JB3 = 1-2) (JP3 = 1-2)