

I-LITE, 4.4 WATT LED DRIVER

(+5V I-Lite, Single Channel, 22V, 0-200mA)

GENERAL DESCRIPTION

The ACI-A022200-2285 is designed to drive a single channel of series connected LEDs with a forward voltage drop up to 22V.

Operating as a true constant current source, this driver provides a complete integrated solution that operates over an input voltage range from +4.5V to +9.0V.

This unit features enable and intensity control inputs.

MECHANICAL/ENVIRONMENTAL

Weight = 7.2 grams

Altitude = 35,000 ft max.

Humidity < 95% non-condensing

Size (L x W x H) = 2.0 IN x 0.95 IN x 0.285 IN


PCB thickness = 0.062 IN

Mounting Holes = 0.120 IN diameter (X2)

Input Power & Control Connector = CON1

LED Output Connector = CON2

RoHS Compliant

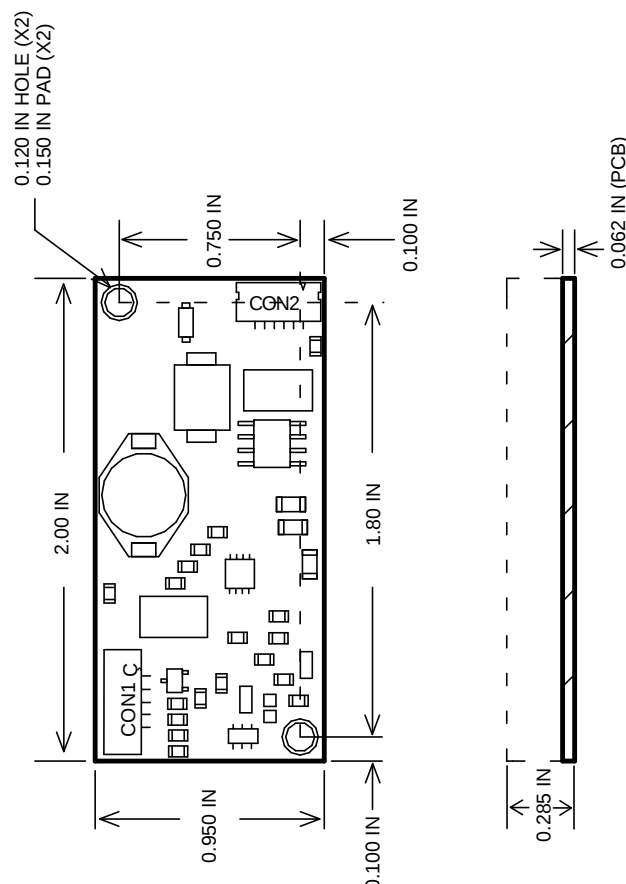

INPUT CONNECTOR
CON1
MOLEX 87438-0543

OUTPUT CONNECTOR
CON2
JST SM06B-SHLS-TF

PIN #	FUNCTION
1	+5V(PWR)
2	GND(PWR)
3	ENABLE (IN)
4	INTENSITY CNTL (IN)
5	+3.3VREF (OUT)

PIN #	FUNCTION
1	LED ANODE
2	N/C
3	N/C
4	LED CATHODE (COMMON)
5	LED CATHODE (COMMON)
6	LED CATHODE (COMMON)

INPUT CABLE P/N 27-R0123

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
Vin	Supply Voltage (Referenced to Ground)	-0.3 to 12	Vdc
Vip	Voltage applied to any Input Pin (Referenced to Ground)	-0.3 to 3.6	Vdc
Iop	Current sourced or sinked from any Output Control Pin	+/- 10	mAdc
Pin	Input Power (DC Input Voltage x DC Input Current)	6.25	W
Top	Operating Temperature (Still air ambient around Driver)	-30 to +85	°C
Tstg	Storage Temperature	-40 to +105	°C

*Maximum Ratings are those values beyond which damage to the LED driver may occur.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
Vin	Supply Voltage (Referenced to Ground)	4.5	9.0	Vdc
Vf	Series Connected Cumulative LED Forward-Drop Voltage	**Vin + 1	22	Vdc
Icctl	LED Intensity Control Voltage	0.25	3.0	Vdc

**Vin must be less than the minimum Forward-Drop Voltage (Vf).

ELECTRICAL CHARACTERISTICS

Vin = +5.0V, Vf = 22V, Icctl = +3.0V, Enable = +3.0V, unless otherwise specified.

Symbol	Parameter	Test Conditions	Min	Nom	Max	Unit
OCV	Open Circuit Voltage	No Load	23	26	29	Vdc
Iout	Output Current		180	200	220	mAdc
Iadj	Nominal output current adjust range	Icctl (Pin4) <= +0.25V	0			mAdc
		Icctl (Pin4) >= +3.0V			200	mAdc
ENoff	Enable Control, Unit Off	Enable (Pin 3)			0.4	Vdc
ENon	Enable Control, Unit ON	Enable (Pin 3)	1.8			Vdc
+3.3Vref	+3.3V Output Reference Voltage	1K Ohm Load to Ground (Pin 5)	3.13	3.3	3.47	Vdc
Iin	Input Current Draw			1.1		Adc
Iind	Input Current Draw (Disabled)	Enable (Pin 3) = 0V		0.001	0.06	Adc
Eff	Electrical Efficiency			80		%

BRIGHTNESS CURVE

