

PRODUCT DATA SHEET

08/29/11

I-LITE, 10.8 WATT LED DRIVER

(Common Cathode, Six Channels¹)

GENERAL DESCRIPTION

The ACI-A036050-1997 is designed to drive up to 6 parallel channels of series connected LEDs. Each series channel can provide an adjustable 0 to 50mA of output current into a maximum forward voltage of 36V.

Operating as a true constant current source, the driver provides a complete integrated solution that operates from a nominal +12V source.

Simple to connect and operate, the driver solution is capable of providing precise control to support dimming applications of over 5,000 to 1.

This unit features enable and intensity control inputs. An on-board rotary switch is also included that allows the user to select other maximum output current levels available. Please see page 3 for available switch settings.

MECHANICAL/ENVIRONMENTAL

Weight = 8.4 grams

Altitude = 35,000 ft max.

Humidity < 95% non-condensing

Size (L x W x H) = 2.0 IN x 0.95 IN x 0.530 IN


PCB thickness = 0.062 IN

Mounting Holes = 0.120 IN diameter (X2)

Input Power & Control Connector = CON1

LED Output Connectors = CON2 and CON3

RoHS Compliant

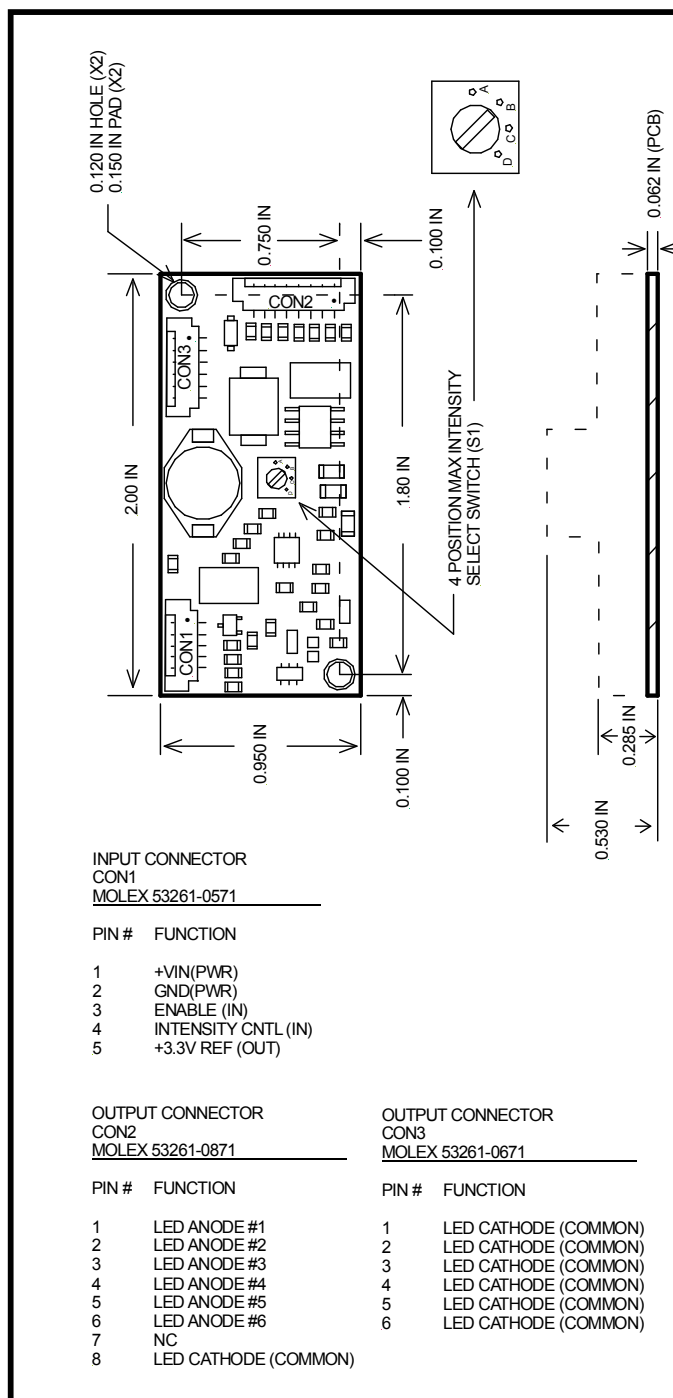

¹ When using less than the total number of channels available, refer to I-Lite Application Note.

PRODUCT DATA SHEET

08/29/11

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
Vin	Supply Voltage (Referenced to Ground)	-0.3 to 18	Vdc
Vip	Voltage applied to any Input Pin (Referenced to Ground)	-0.3 to 3.6	Vdc
Iop	Current sourced or sinked from any Output Control Pin	+/- 10	mA
Pin	Input Power (DC Input Voltage x DC Input Current)	13.7	W
Top	Operating Temperature (Still air ambient around Driver)	-30 to +70	°C
Tstg	Storage Temperature	-40 to +105	°C

*Maximum Ratings are those values beyond which damage to the LED driver may occur.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
Vin	Supply Voltage (Referenced to Ground)	10	15	Vdc
Vf	Series Connected Cumulative LED Forward-Drop Voltage	18	36	Vdc
Icntl	LED Intensity Control Voltage	0.25	3.0	Vdc

ELECTRICAL CHARACTERISTICS

Vin = +12V, Vf = 34V per channel, # of channels = 6, Icntl = +3.0V, Enable = +3V, S1 = A, unless otherwise specified.

Symbol	Parameter	Test Conditions	Min	Nom	Max	Unit
OCV	Open Circuit Voltage	No Load	45	50	55	Vdc
Iout-a	Output Current per Channel, Setting A	Switch S1 = A	47.5	50	52.5	mA
Iout-b	Output Current per Channel, Setting B	Switch S1 = B	40	42	44	mA
Iout-c	Output Current per Channel, Setting C	Switch S1 = C	**	**	**	mA
Iout-d	Output Current per Channel, Setting D	Switch S1 = D	**	**	**	mA
ICNTL	Nominal Output Current per Channel Adjustable Range	ICNTL (Pin 4) = +0.25V to +3.0V	0		50	mA
ENoff	Enable Control, Unit Off	Enable (Pin 3)			0.5	Vdc
ENon	Enable Control, Unit ON	Enable (Pin 3)	2.0			Vdc
+3.3Vref	+3.3V Output Reference Voltage	1K Ohm Load to Ground (Pin 5)	3.13	3.3	3.47	Vdc
Iin	Input Current Draw			0.95		
Iind	Input Current Draw (Disabled)	Enable (Pin 3) = 0V		0.001	0.06	mA
Eff	Electrical Efficiency			90		%

**Switch position reserved for future use.

PRODUCT DATA SHEET

08/29/11

Possible Configurations

Switch Setting (S1)	Number of LED Channels Connected					
	1	2	3	4	5	6
	Iout/ch (mA)	Iout/ch (mA)	Iout/ch (mA)	Iout/ch (mA)	Iout/ch (mA)	Iout/ch (mA)
A	300	150	100	75	60	50
B	250	125	83.3	62.5	50	41.7
C	Switch position reserved for future use.					
D	Switch position reserved for future use.					

TABLE1. – Output Current per Channel, based on Switch (S1) Setting and Number of Channels Connected.

