

I-LITE, 8.0 WATT LED DRIVER

(Common-Cathode, One to Six Channels¹)

GENERAL DESCRIPTION

The ACI-A040033-1993 is designed to drive up to 6 parallel channels of series connected LEDs.

The number of channels and current per channel are configurable per Table 1 on Page 3, by setting a four-position switch located on the driver, enabling the driver to support a wide range of displays.

Operating as a true constant current source, the driver provides a complete integrated solution that operates from a nominal +24V source.

This unit features enable and intensity control inputs.

Additional Support Documentation:

1. Application Note AN-OP1
2. I-Lite LED Driver Application Note

MECHANICAL/ENVIRONMENTAL

Weight = 7.2 grams

Altitude = 35,000 ft max.

Humidity < 95% non-condensing

Size (L x W x H) = 2.0 IN x 0.95 IN x 0.285 IN


PCB thickness = 0.062 IN

Mounting Holes = 0.120 IN diameter (X2)

Input Power & Control Connector = CON1

LED Output Connectors = CON2 and CON3

RoHS Compliant

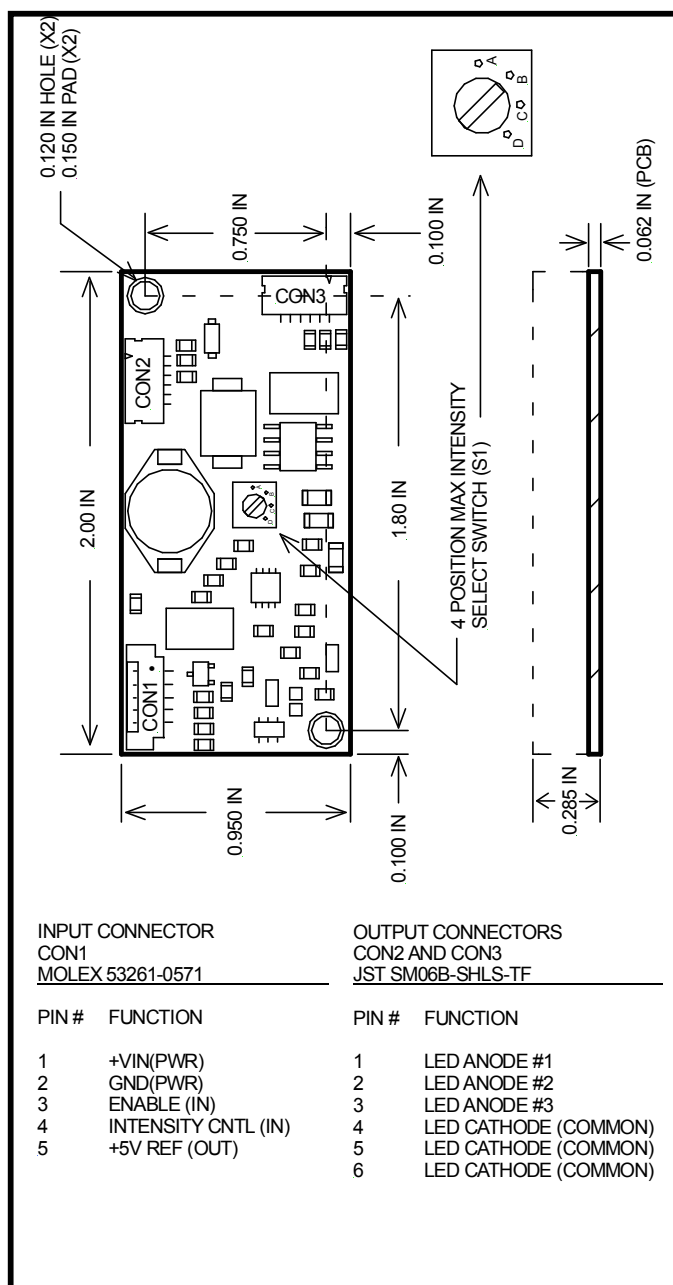

¹ When using less than the total number of channels available, refer to the I-Lite LED Driver Application Note.

PRELIMINARY DATA SHEET

08/03/11

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
Vin	Supply Voltage (Referenced to Ground)	-0.3 to 32	Vdc
Vip	Voltage applied to any Input Pin (Referenced to Ground)	-0.7 to 5.7	Vdc
Iop	Current sourced or sinked from any Output Control Pin	+/- 10	mAdc
Pin	Input Power (DC Input Voltage x DC Input Current)	10.1	W
Top	Operating Temperature (Still air ambient around Driver)	-30 to +85	°C
Tstg	Storage Temperature	-40 to +105	°C

*Maximum Ratings are those values beyond which damage to the LED driver may occur.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
Vin	Supply Voltage (Referenced to Ground)	21.6	26.4	Vdc
Vf	Series Connected Cumulative LED Forward-Drop Voltage	**Vin + 1	38	Vdc
Icntl	LED Intensity Control Voltage	0.5	4.5	Vdc

**Vin must be less than the minimum Forward-Drop Voltage (Vf).

ELECTRICAL CHARACTERISTICS

Vin = +24V, Icntl = +4.5V, Enable = +5V, unless otherwise specified

Symbol	Parameter	Test Conditions	Min	Nom	Max	Unit
OCV	Open Circuit Voltage	No Load	45	50	55	Vdc
ENoff	Enable Control, Unit Off	Enable (Pin 3)			0.5	Vdc
ENon	Enable Control, Unit ON	Enable (Pin 3)	2.0			Vdc
+5Vref	+5V Output Reference Voltage	1K Ohm Load to Ground (Pin 5)	4.75	5.0	5.25	Vdc
Icntl	Nominal output current adjust range	Icntl (Pin4) = +0.5V to +4.5V	0		Note1	mAdc
Iind	Input Current Draw (Disabled)	Enable (Pin 3) = 0V		0.001	0.06	Adc
Eff	Electrical Efficiency			90		%

Note1: Maximum current per configuration selected (refer to Table 1 on Page 3)

Electrical Characteristics continued on Page 3.

397 Route 281 – P.O. Box 1175
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

PRELIMINARY DATA SHEET

08/03/11

ELECTRICAL CHARACTERISTICS (for popular configurations)

Vin = +24V, Icntl = +4.5V, Enable = +5V, unless otherwise specified

Symbol	Parameter	Test Conditions	Min	Nom	Max	Unit
Iout	Output Current per channel	Number of LED Channels Driven = 2 Vf = 36 S1 = A	57	60	63	mAdc
Iin	Input Current Draw		0.31	0.33	0.35	Adc


Possible Configurations

Switch Setting (S1)	Number of LED Channels Connected					
	1	2	3	4	5	6
	Iout/ch (mA)	Iout/ch (mA)	Iout/ch (mA)	Iout/ch (mA)	Iout/ch (mA)	Iout/ch (mA)
A	120	60	40	30	24	20
B	This switch position is reserved for future use					
C	This switch position is reserved for future use					
D	This switch position is reserved for future use					

TABLE1. – Output Current per Channel, based on Switch (S1) Setting and Number of Channels Connected.

The Nominal Input Current Draw, based on Vin, can be calculated from the following equation:

$$\text{Nominal Input Current Draw (A)} = \frac{\text{Iout per Channel (mA)} \times \text{Number of Channels} \times \text{Vf (V)} \times 0.0011}{\text{Vin (V)}}$$

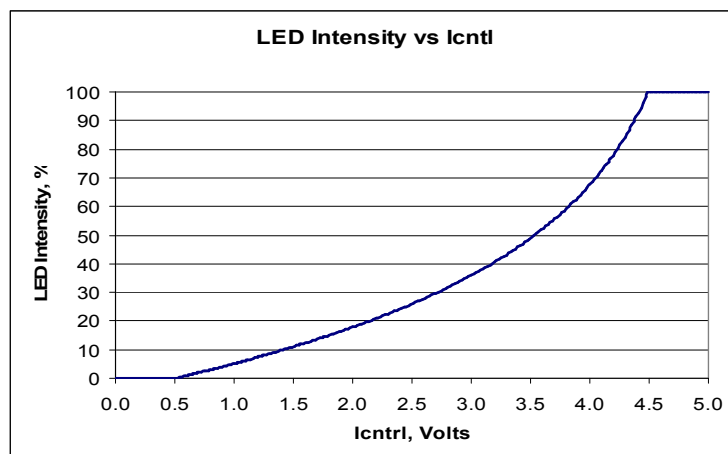

LED Brightness Curve