

I-DRIVE 3, 9.5 WATT LED DRIVER (Single Channel 95V, 0-100mA)


GENERAL DESCRIPTION

The ACI-C095100-2436 represents the 3rd generation of I-Drive technology used for powering LED backlights.

Operating as a true constant current source and capable of driving series connected LEDs with a forward voltage drop up to 95V. This driver provides a complete integrated solution that is regulated over an input voltage range from +9V to +18V.

Simple to connect and operate, this driver solution is capable of providing precise control to support dimming applications with a minimum of 3000:1.

This unit features enable and intensity control inputs.

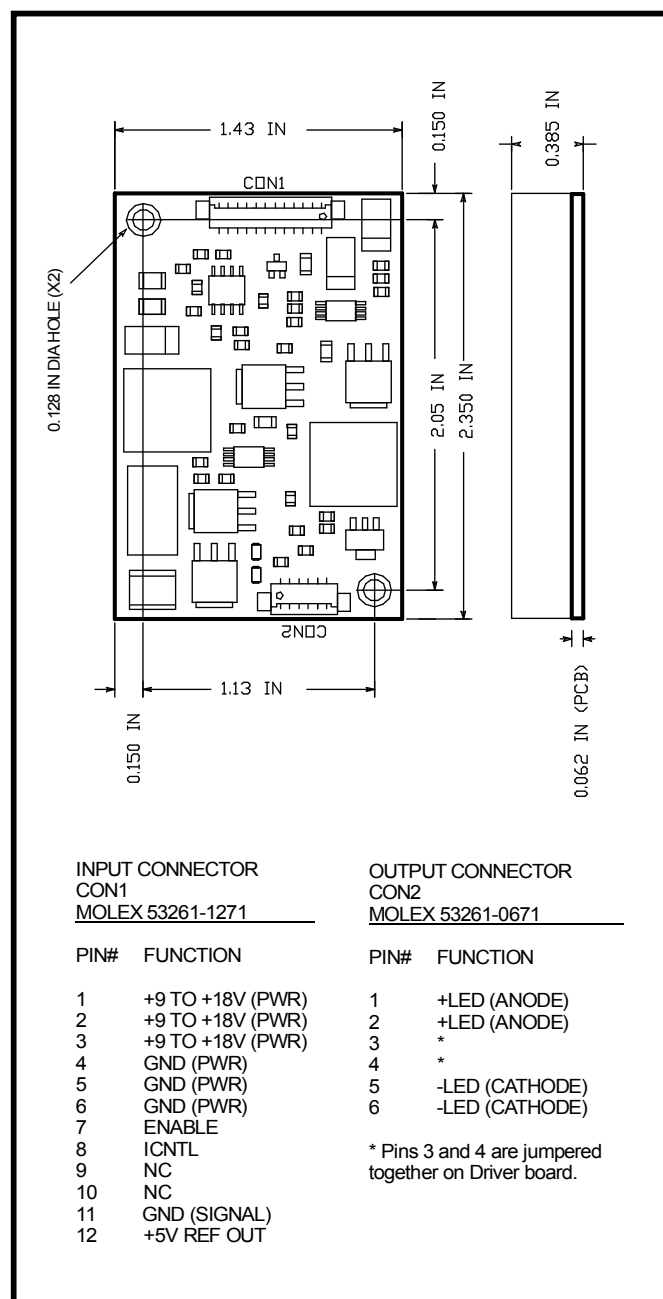

MECHANICAL/ENVIRONMENTAL

Weight = 20.5 grams

Altitude = 35,000 ft max.

Humidity < 95% non-condensing

Size (L x W x H) = 2.35 IN x 1.43 IN x 0.385 IN

PCB thickness = 0.062 IN

Mounting Holes = 0.128 IN diameter (X2)

Input Power & Control Connector = CON1

LED Output Connector = CON2

RoHS Compliant

PRELIMINARY DATA SHEET

11/15/13

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
Vin	Supply Voltage (Referenced to Ground)	-0.7 to 20	Vdc
Vip	Voltage applied to any Input Pin (Referenced to Ground)	-0.7 to 5.7	Vdc
Iop	Current sourced or sinked from any Output Control Pin	+/- 10	mAdc
Pin	Input Power (DC Input Voltage x DC Input Current)	13.0	W
Top	Operating Temperature (Still air ambient around Driver)	-30 to +85	°C
Tstg	Storage Temperature	-40 to +105	°C

*Maximum Ratings are those values beyond which damage to the driver may occur.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
Vin	Supply Voltage (Referenced to Ground)	9.0	18.0	Vdc
Vf	Series Connected Cumulative LED Forward-Drop Voltage	36	95	Vdc
Icntl	LED Intensity Control Voltage	0.1	4.6	Vdc

ELECTRICAL CHARACTERISTICS

Vin = +12V, Vf = 95Vdc, Icntl = +4.6V, Enable = +5V unless otherwise specified

Symbol	Parameter	Test Conditions	Min	Nom	Max	Unit
OCV	Open Circuit Voltage	No Load	133	140	147	Vdc
Iout	Output Current		95	100	105	mAdc
Iadj	Nominal Output Current Adjust Range	Icntl(Pin 8) <= +0.1V	0			mAdc
		Icntl(Pin 8) >= +4.6V			100	mAdc
ENoff	Enable Control, Unit Off				0.5	Vdc
ENon	Enable Control, Unit ON		2.0			Vdc
+5Vref	+5V Output Reference Voltage	1K Ohm Load to Ground (Pin 12)	4.75	5.0	5.25	Vdc
Iin	Input Current Draw			0.91		Adc
Iind	Input Current Draw (Disabled)	Enable (Pin 7) = 0V			0.06	Adc
Eff	Electrical Efficiency			87		%

LED Intensity vs I_{cntl}

