



**397 Route 281
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com**

ACD-2572

PRODUCT DATA SHEET – PAGE 1 OF 2

17.0" SXGA LED BACKLIT TFT DISPLAY

1000:1 dimming/Cool operation

GENERAL DESCRIPTION


The ACD-2572 consists of the AUO G170EG01 V1 SXGA TFT display modified with a high performance LED backlight.

Performance at given brightness levels

700 cd/m² with 20.1 watts LED power

Display outline identical to standard LED equipped panel

10/3/2014

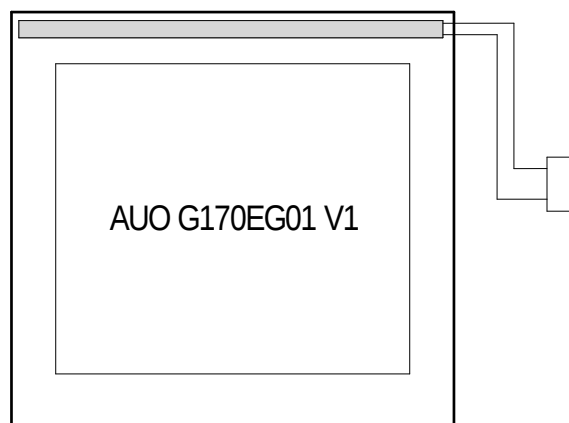

LCD PANEL HIGHLIGHTS

17.0" TFT Active Matrix Color

337.920 (H) mm x 270.336 (V) mm viewable area

SXGA 1280(x3) x 1024 pixels

16.7M colors (RGB 6-bits + Hi-FRC data)

1000:1 typical contrast ratio

Display Mode: Normally White

For complete LCD specification (standard panel), refer to AUO datasheet G170EG01 V1

LED BACKLIGHT FEATURES

White LED edge-light rail

Two wire connection (Typically 11 inches long), allows simple interconnect with LED driver¹

Projected lifetime > 75,000 hours

Active fault protection keeps remaining LED's operating normally if one should ever fail

1000:1 or better dimming ratio, guaranteed¹

¹ For best power transfer and control, use ACI-2571 LED driver. Do not set the driver output current (Ifwd) higher than the value specified in the Maximum Ratings table of this document. Please contact the factory for more specific use LED driver solutions if required.

MAXIMUM RATINGS

10/3/2014

Symbol	Parameter	Value	Unit
Top	Operating temperature of display (center of panel surface)	-30 to +85	Deg-C
Tled	Operating temperature of LED edge light (light rail contact)	-30 to +85	Deg-C
Tstg	Display storage temperature	-30 to +85	Deg-C
Ifwd	Maximum LED edge-light forward current (DC)	90	mA

PANEL/BACKLIGHT OPTICAL CHARACTERISTICS

Ifwd = 75mA per LED bank, 4 banks per rail, 1 rail per display (LED rail ACR-0684-2456), Ta = +25Deg-C, LCD un-powered

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Bp	Panel Brightness		630	700	770	cd/m ²
X	White X coordinate			0.259		-
Y	White Y coordinate			0.285		-

LED EDGE-LIGHT ELECTRICAL CHARACTERISTICS

Ifwd = 75mA per LED bank, 4 banks per rail, 1 rail per display (LED rail ACR-0684-2456), Top = +25Deg-C

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Vfwd	LED rail forward voltage drop		60	67	74	Vdc

TYPICAL LCD/LED BACKLIGHT PERFORMANCE GRAPHS

