



397 Route 281
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

ACD-2573

PRODUCT DATA SHEET

10/6/14

19.0" SXGA LED BACKLIT TFT DISPLAY

Sunlight Readability/1000:1 dimming/Cool operation

GENERAL DESCRIPTION

The ACD-2573 consists of the AUO G190EG01 V1 SXGA TFT display modified with a high performance LED backlight.

Customer Consigned Panel


Performance at given brightness levels

1000 cd/m² with 36 watts LED power

The LCD modified in this High Bright Solution meets AUO Incoming Inspection Standard for TFT-LCD Modules (A+)

Display outline identical to standard LED equipped panel

For many applications, satisfies sunlight readability goals

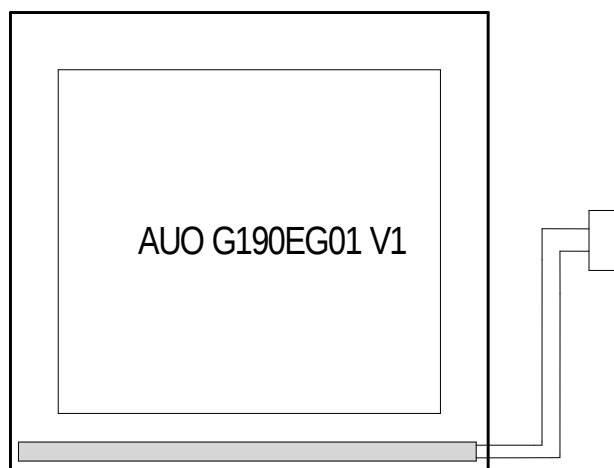

LCD PANEL HIGHLIGHTS

19.0" TFT Active Matrix Color

376.32 (H) mm x 301.06 (V) mm viewable area

SXGA 1280(3) x 1024 pixels, 16.7M colors

1000:1 typical contrast ratio

Display Mode Normally White

For complete LCD specification (standard panel), refer to AUO G190EG01 V1 data sheet.

LED BACKLIGHT FEATURES

White LED edge-light rail

Two wire connection (Typically 11 inches long), allows simple interconnect with LED driver¹

Projected lifetime > 75,000 hours

1000:1 or better dimming ratio, guaranteed¹

¹ For best power transfer and control, use ACI-F100400-2561 LED drivers. Do not set the driver output current (Ifwd) higher than the value specified in the Maximum Ratings table of this document. Please contact the factory for more specific use LED driver solutions if required.

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
Top	Operating temperature of display (center of panel surface)	0 to +50	Deg-C
Tled	Operating temperature of LED edge light (light rail contact)	-30 to +85	Deg-C
Tstg	Display storage temperature	-20 to +60	Deg-C
Ifwd	Maximum LED edge-light forward current (DC)	120	mA

*Maximum Ratings are those values beyond which damage to the driver may occur

PANEL/BACKLIGHT OPTICAL CHARACTERISTICS

Ifwd = 100mA per bank, LED rail ACR-0864-2562, 4 banks per rail, 1 rail per display, Ta = +25Deg-C, LCD unpowered

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Bp	Panel Brightness		900	1000	1100	cd/m ²
X	White X coordinate			0.268		-
Y	White Y coordinate			0.276		-

LED EDGE-LIGHT ELECTRICAL CHARACTERISTICS

Ifwd = 100mA per bank, 4 banks per rail, 1 rail per display, Top = +25Deg-C

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Vfwd	LED rail forward voltage drop		81	90	99	Vdc

TYPICAL LCD/LED BACKLIGHT PERFORMANCE GRAPHS

