

PRODUCT DATA SHEET

05/19/14

I-DRIVE 5, 32.0 WATT LED DRIVER (Eight Channel 40V, 0-100mA per Channel)

GENERAL DESCRIPTION

The ACI-E040800-2476 represents the 5th generation of I-Drive technology used for powering LED backlights.

Operating as a true constant current source and capable of driving up to 8 banks of 13 LEDs in series. This driver provides a complete integrated solution that is regulated over an input range of +10V to +18V.

Simple to connect and operate, this driver solution is capable of providing precise control to support dimming applications with a minimum of 3000:1.

This unit features enable and intensity control inputs, and is designed to work with the Digital View LCD Controller and Button Board (See page 3 for more information).

MECHANICAL/ENVIRONMENTAL

Weight = 35.7 grams

Altitude = 35,000 ft max.

Humidity < 95% non-condensing

Size (L x W x H) = 3.25 IN x 2.00 IN x 0.47 IN


PCB thickness = 0.062 IN

Mounting Holes = 0.128 IN diameter (X2)

Input Power & Control Connector = CON1

LED Output Connectors = CON2 and CON3

RoHS Compliant

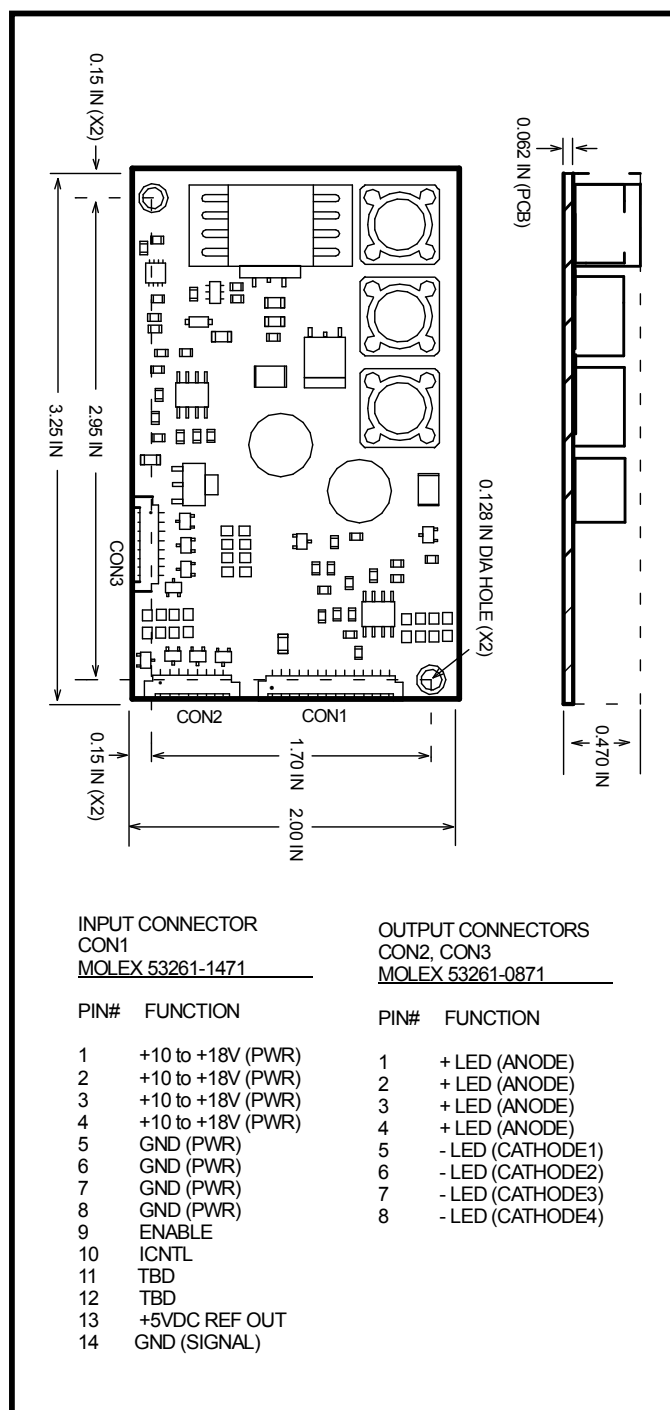

PRODUCT DATA SHEET

05/19/14

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
Vin	Supply Voltage (Referenced to Ground)	-0.7 to 20	Vdc
Vip	Voltage applied to any Input Pin (Referenced to Ground)	-0.7 to 5.7	Vdc
Iop	Current sourced or sinked from any Output Control Pin	+/- 10	mAdc
Pin	Input Power (DC Input Voltage x DC Input Current)	40	W
Top	Operating Temperature (Still air ambient around Driver)	-30 to +70	°C
Tstg	Storage Temperature	-40 to +105	°C

*Maximum Ratings are those values beyond which damage to the driver may occur.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
Vin	Supply Voltage (Referenced to Ground)	10.0	18.0	Vdc
Vf	Series Connected Cumulative LED Forward-Drop Voltage	**Vin + 1	40	Vdc
Icntl	LED Intensity Control Voltage	0.1	4.6	Vdc

**Vin must be less than the minimum Forward-Drop Voltage (Vf).

ELECTRICAL CHARACTERISTICS


Vin = +12V, Vf = 40V per channel, # of channels = 8, Icntl = +0.1V, Enable = +5V unless otherwise specified.

Symbol	Parameter	Test Conditions	Min	Nom	Max	Unit
OCV	Open Circuit Voltage	No Load	40	45	50	Vdc
Iout	Output Current per Channel		95	100	105	mAdc
Iadj	Nominal Output Current Adjust Range Per Channel	Icntl(Pin 10) ≤ +0.1V			100	mAdc
		Icntl(Pin 10) ≥ +4.6V	0			mAdc
ENoff	Enable Control, Unit Off				0.5	Vdc
ENon	Enable Control, Unit ON		2.0			Vdc
+5Vref	+5V Output Reference Voltage	1K Ohm Load to Ground (Pin 13)	4.75	5.0	5.25	Vdc
Iin	Input Current Draw			3.1		Adc
Iind	Input Current Draw (Disabled)	Enable (Pin 9) = 0V			0.06	Adc
Eff	Electrical Efficiency			87		%

CAUTION: Due to the high output current per channel, all eight channels must be used.

PRODUCT DATA SHEET

05/19/14

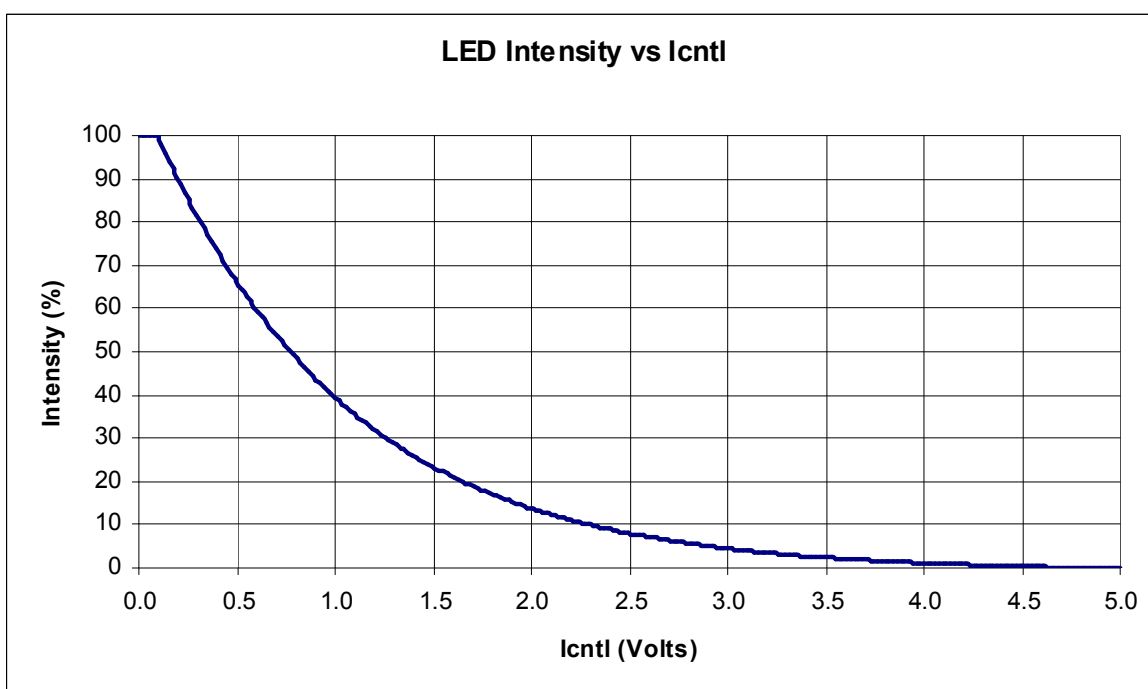

NOTE: The intensity response curve is designed to be compatible with the Digital View LCD Controller and Button Board.

Digital View LCD Controllers and Jumper Settings

LCD Controller		Jumper Settings
Model	P/N	
ALR-1400		(JB2 = 2-3) (JB3 = 1-2) (JP2 = 1-2)
ALR-1920		(JB2 = 2-3) (JB3 = 1-2) (JB5 = 1-2)
DVS-1600		(JB1 = 2-3) (JB2 = 2-3) (JB3 = 1-2) (JB5 = 1-2)
SP-1600		(JB2 = 2-3) (JB3 = 1-2) (JP3 = 1-2)
SVH-1920		(JB2 = 2-3) (JB3 = 1-2) (JP3 = 1-2)
SVX-1920	41721003X-3 or up	(JB1 = 1-2) (JB2 = 2-3) (JB3 = 1-2) (JB5 = 1-2)