



NLT Technologies

TFT COLOR LCD MODULE

NL160120AC27-32

54cm (21.3Type)

UXGA

LVDS Interface (2 port)

DATA SHEET 

DOD-PP-2172 (1st edition)

**This DATA SHEET is updated document from
PRELIMINARY DATA SHEET DOD-PP-2136(2).**

**All information is subject to change without notice.
Please confirm the sales representative before
starting to design your system.**

INTRODUCTION

The Copyright to this document belongs to NLT Technologies, Ltd. (hereinafter called "NLT"). No part of this document will be used, reproduced or copied without prior written consent of NLT.

NLT does and will not assume any liability for infringement of patents, copyrights or other intellectual property rights of any third party arising out of or in connection with application of the products described herein except for that directly attributable to mechanisms and workmanship thereof. No license, express or implied, is granted under any patent, copyright or other intellectual property right of NLT.

Some electronic products would fail or malfunction at a certain rate. In spite of every effort to enhance reliability of products by NLT, the possibility of failures and malfunction might not be avoided entirely. To prevent the risks of damage to death, human bodily injury or other property arising out thereof or in connection therewith, each customer is required to take sufficient measures in its safety designs and plans including, but not limited to, redundant system, fire-containment and anti-failure.

The products are classified into three grades: "**Standard**", "**Special**", and "**Specific**".

Each quality grade is designed for applications described below. Any customer who intends to use a product for application other than that of Standard is required to contact an NLT sales representative in advance.

The Standard: Applications as any failure, malfunction or error of the products are free from any damage to death, human bodily injury or other property (Products Safety Issue) and not related the safety of the public (Social Issues), like general electric devices.

Examples: Office equipment, audio and visual equipment, communication equipment, test and measurement equipment, personal electronic equipment, home electronic appliances, car navigation system (with no vehicle control functions), seat entertainment monitor for vehicles and airplanes, fish finder (except marine radar integrated type), PDA, etc.

The Special: Applications as any failure, malfunction or error of the products might directly cause any damage to death, human bodily injury or other property (Products Safety Issue) and the safety of the public (Social Issues) and required high level reliability by conventional wisdom.

Examples: Vehicle/train/ship control system, traffic signals system, traffic information control system, air traffic control system, surgery/operation equipment monitor, disaster/crime prevention system, etc.

The Specific: Applications as any failure, malfunction or error of the products might severe cause any damage to death, human bodily injury or other property (Products Safety Issue) and the safety of the public (Social Issues) and developed, designed and manufactured in accordance with the standards or quality assurance program designated by the customer who requires extremely high level reliability and quality.

Examples: Aerospace system (except seat entertainment monitor), nuclear control system, life support system, etc.

The quality grade of this product is the "**Standard**" unless otherwise specified in this document.

CONTENTS

INTRODUCTION	2
1. OUTLINE.....	4
1.1 STRUCTURE AND PRINCIPLE.....	4
1.2 APPLICATION	4
1.3 FEATURES.....	4
2. GENERAL SPECIFICATIONS	5
3. BLOCK DIAGRAM.....	6
4. DETAILED SPECIFICATIONS	7
4.1 MECHANICAL SPECIFICATIONS.....	7
4.2 ABSOLUTE MAXIMUM RATINGS	7
4.3 ELECTRICAL CHARACTERISTICS.....	8
4.3.1 LCD panel signal processing board	8
4.3.2 LED driver	9
4.3.3 Current wave for LED driver	9
4.3.4 Power supply voltage ripple.....	10
4.3.5 Fuse.....	10
4.4 POWER SUPPLY VOLTAGE SEQUENCE	11
4.4.1 LCD panel signal processing board	11
4.4.2 LED driver	11
4.5 CONNECTIONS AND FUNCTIONS FOR INTERFACE PINS.....	12
4.5.1 LCD panel signal processing board	12
4.5.2 LED driver	13
4.5.3 Positions of socket	13
4.6 LUMINANCE CONTROL.....	14
4.6.1 Luminance control methods.....	14
4.6.2 Detail of BRTP timing	15
4.7 LVDS data input map.....	16
4.7.1 Mode A	16
4.7.2 Mode B	16
4.8 DISPLAY COLORS AND INPUT DATA SIGNALS	17
4.9 INPUT SIGNAL TIMINGS.....	18
4.9.1 Timing characteristics	18
4.9.2 Input signal timing chart	18
4.10 LVDS DATA TRANSMISSION METHOD	19
4.11 LVDS Rx AC SPEC	20
4.12 DISPLAY POSITIONS.....	21
4.13 PIXEL ARRANGNMENT	21
4.14 OPTICS.....	22
4.14.1 Optical characteristics	22
4.14.2 Definition of contrast ratio.....	23
4.14.3 Definition of luminance uniformity	23
4.14.4 Definition of response times	23
4.14.5 Definition of viewing angles.....	24
5. ESTIMATED LUMINANCE LIFETIME	24
6. RELIABILITY TESTS.....	25
7. PRECAUTIONS	26
7.1 MEANING OF CAUTION SIGNS	26
7.2 CAUTIONS	26
7.3 ATTENTIONS	26
7.3.1 Handling of the product	26
7.3.2 Environment.....	27
7.3.3 Characteristics.....	27
7.3.4 Others.....	27
8. OUTLINE DRAWINGS	28
8.1 FRONT VIEW	28
8.2 REAR VIEW	29

1. OUTLINE

1.1 STRUCTURE AND PRINCIPLE

Color LCD module NL160120AC27-32 is composed of the amorphous silicon thin film transistor liquid crystal display (a-Si TFT LCD) panel structure with driver LSIs for driving the TFT (Thin Film Transistor) array and a backlight.

The a-Si TFT LCD panel structure is injected liquid crystal material into a narrow gap between the TFT array glass substrate and a Color-filter glass substrate.

Grayscale data signals from a host system (e.g. signal generator, etc.) are modulated into best form for active matrix system by a signal processing board, and sent to the driver LSIs which drive the individual TFT arrays.

The TFT array as an electro-optical switch regulates the amount of transmitted light from the backlight assembly, when it is controlled by data signals. Color images are created by regulating the amount of transmitted light through the TFT array.

1.2 APPLICATION

- Color monitor system

1.3 FEATURES

- Ultra-wide viewing angle (Super Fine TFT (SFT))
- High luminance
- High contrast
- High resolution
- Low reflection
- Wide color gamut
- 256 gray scale in each R, G, B sub-pixel (8-bit), 16,777,216 colors
- LVDS interface
- Selectable LVDS data input map
- Small foot print
- Long life LED backlight built in LED driver
- Acquisition product for UL60950-1/CSA C22.2 No.60950-1-03 (File number: E170632)
- Compliance with the European RoHS directive (2011/65/EU)




2. GENERAL SPECIFICATIONS

Display area	432.0 (H) × 324.0 (V) mm	
Diagonal size of display	54cm (21.3 inches)	
Drive system	a-Si TFT active matrix	
Display color	16,777,216 colors	
Pixel	1,600 (H) × 1,200 (V) pixels (1 pixel consists of 3 sub-pixels (RGB).)	
Pixel arrangement	RGB vertical stripe	
Sub-pixel pitch	0.090 (H) × 0.270 (V) mm	
Pixel pitch	0.270 (H) × 0.270 (V) mm	
Module size	457.0 (W) × 350.0 (H) × 21.5 (D) mm (typ.)	
Weight	2,800g (typ.)	☆
Contrast ratio	1,400:1 (typ.)	
Viewing angle	At the contrast ratio ≥ 10:1 • Horizontal: Right side 88° (typ.), Left side 88° (typ.) • Vertical: Up side 88° (typ.), Down side 88° (typ.)	
Designed viewing direction	Viewing angle with optimum grayscale ($\gamma \approx$ DICOM): Normal axis (perpendicular) Note1	
Polarizer surface	Antiglare	
Polarizer pencil-hardness	2H (min.) [by JIS K5600]	
Color gamut	At LCD panel center 72% (typ.) [against NTSC color space]	
Response time	$T_{on} + T_{off}$ (10% ← → 90%) 40ms (typ.)	☆
Luminance	At the maximum luminance control 900cd/m ² (typ.)	
Signal system	2 ports LVDS interface [RGB 8-bit signals, Data enable signal (DE), Dot clock (CLK)]	
Power supply voltage	LCD panel signal processing board: 12.0V LED driver: 12.0V	
Backlight	LED backlight built in LED driver	
Power consumption	At checkered flag pattern, the maximum luminance control 52.8W (typ.)	☆

Note1: When the product luminance is 450cd/m², the gamma characteristic is designed to $\gamma \approx$ DICOM.

3. BLOCK DIAGRAM

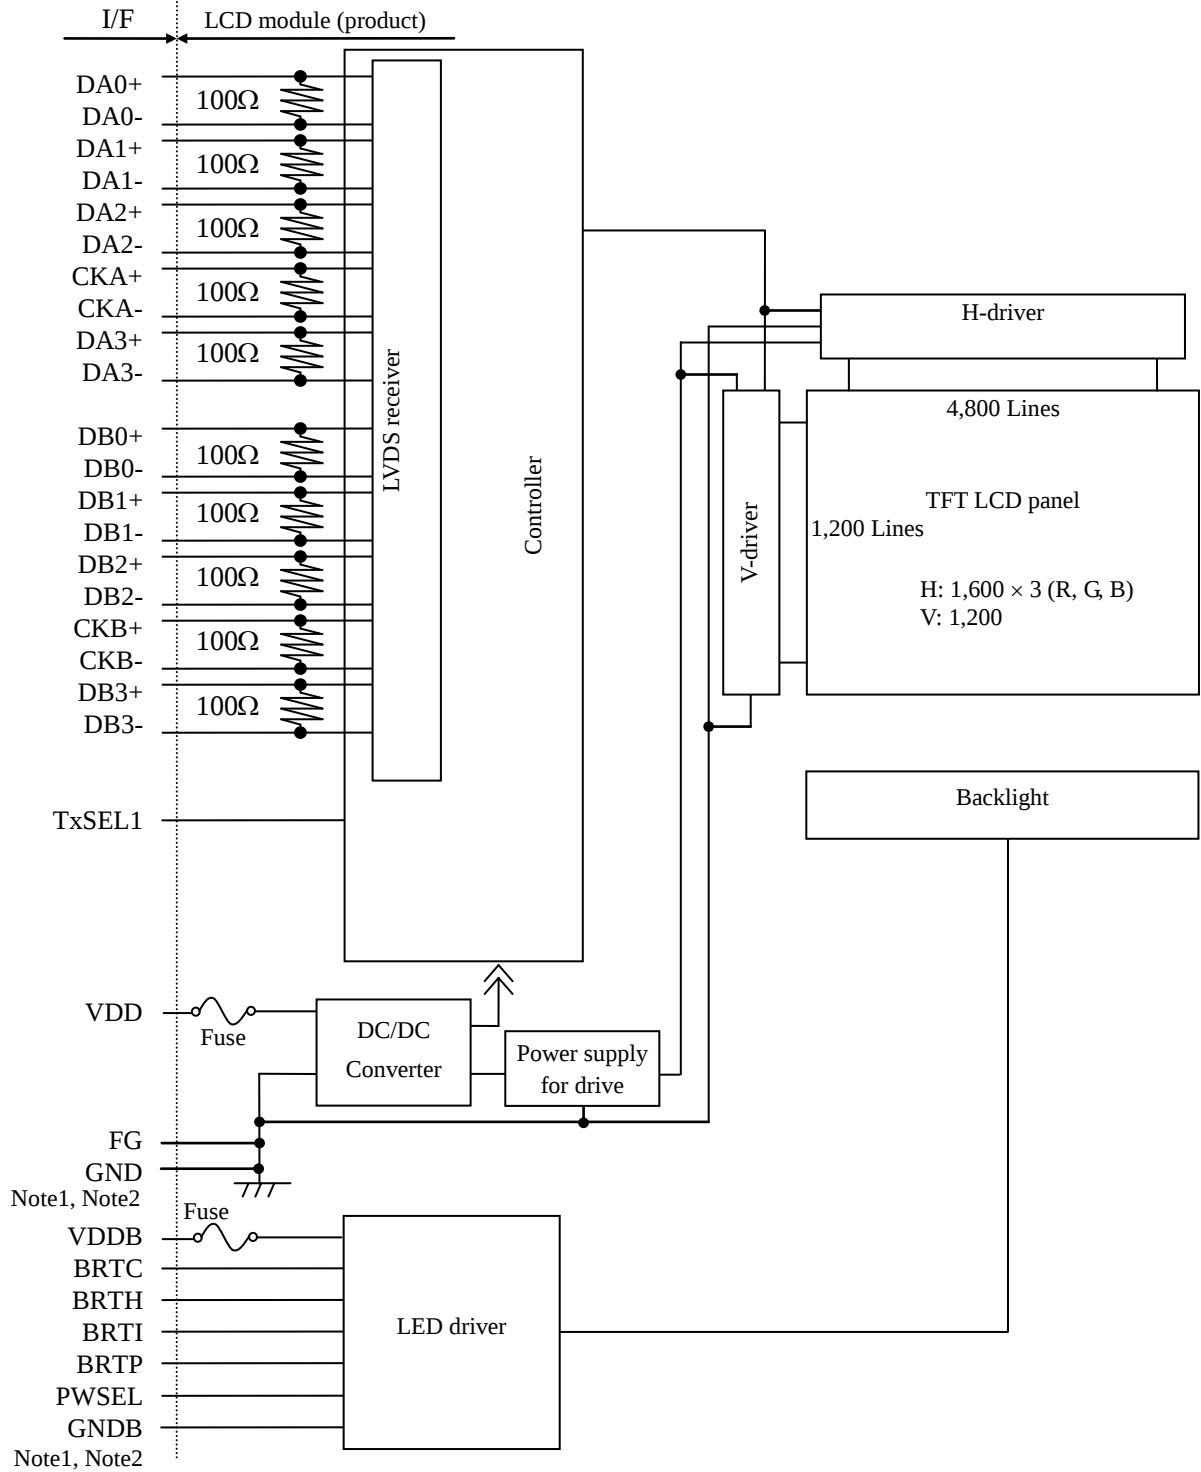

Note1: Relations between GND (Signal ground), FG (Frame ground) and GNDB (LED driver ground) in the LCD module are as follows.

GND- FG	Connected
GND- GNDB	Not connected
FG- GNDB	Not connected

Note2 GND, FG and GNDB must be connected to customer equipment's ground, and it is recommended that these grounds to be connected together in customer equipment.

Note3 Each pair of the LVDS signal has a 100Ω terminating resistance between D+ and D-.

4. DETAILED SPECIFICATIONS

4.1 MECHANICAL SPECIFICATIONS

Parameter	Specification	Unit
Module size	457.0 ±0.5 (W) × 350.0 ±0.5 (H) × 21.5 (typ., D) 23.0 (max. D) Note1, Note2	mm
Display area	432.0 (H) × 324.0 (V) Note2	mm
Weight	2,800 (typ.), 2,980 (max.)	g



Note1: Excluding warpage of the cover for circuit board.

Note2: See "8. OUTLINE DRAWINGS".

4.2 ABSOLUTE MAXIMUM RATINGS

Parameter			Symbol	Rating	Unit	Remarks
Power supply voltage	LCD panel signal processing board		VDD	-0.3 to +14.0	V	Ta= 25°C
	LED driver		VDDb	-0.3 to +15.0	V	
Input voltage for signals	LCD panel signal processing board Note1		Vi	-0.3 to +3.45	V	VDD= 12.0V
	LED driver	BRTI signal	VBI	-0.3 to +1.5	V	VDDb= 12.0V
		BRTP signal	VBP	-0.3 to +5.5	V	
		BRTC signal	VBC	-0.3 to +5.5	V	
		PWSEL signal	VBS	-0.3 to +5.5	V	
Storage temperature Note6			Tst	-20 to +60	°C	-
Operating temperature Note6		Front surface	TopF	0 to +60	°C	Note2
		Rear surface	TopR	0 to +60	°C	Note3
Relative humidity Note4, Note6			RH	≤ 95	%	Ta ≤ 40°C
				≤ 85	%	40°C < Ta ≤ 50°C
				≤ 70	%	50°C < Ta ≤ 55°C
Absolute humidity Note4, Note6			AH	≤ 73 Note5	g/m³	Ta > 55°C
Operating altitude			-	≤ 5,100	m	0°C ≤ Ta ≤ 55°C
Storage altitude			-	≤ 13,600	m	-20°C ≤ Ta ≤ 60°C

Note1: DA0+/-, DA1+/-, DA2+/-, DA3+/-, CKA+/-, DB0+/-, DB1+/-, DB2+/-, DB3+/-, KKB+/-

Note2: Measured at LCD panel surface (including self-heat)

Note3: Measured at LCD module's rear shield surface (including self-heat)

Note4: No condensation

Note5: Water amount at Ta= 55°C and RH= 70%

Note6: The image quality may cause degradation in case of rapid change humidity and temperature.

4.3 ELECTRICAL CHARACTERISTICS


4.3.1 LCD panel signal processing board

(1) DC characteristics

(Ta= 25°C)

Parameter		Symbol	min.	typ.	max.	Unit	Remarks
Power supply voltage		VDD	10.8	12.0	13.2	V	-
Power supply current		IDD	-	300 Note1	400 Note2	mA	at VDD= 12.0V
Permissible ripple voltage		VRP	-	-	100	mVp-p	for VDD
Differential input threshold voltage	High	VTH	-	-	+100	mV	at VCM= 1.2V Note3, Note4
	Low	VTL	-100	-	-	mV	
Input Differential Voltage		VID	100	-	600	mV	-
Differential Input Common Mode Voltage		VCM	1.0	1.2	1.4	V	-
Terminating resistance		RT	-	100	-	Ω	-

Note1: Checkered flag pattern (by EIAJ ED-2522)
Note2: Pattern for maximum current
Note3: Common mode voltage for LVDS driver
Note4: DC characteristics (LVDS receiver part)

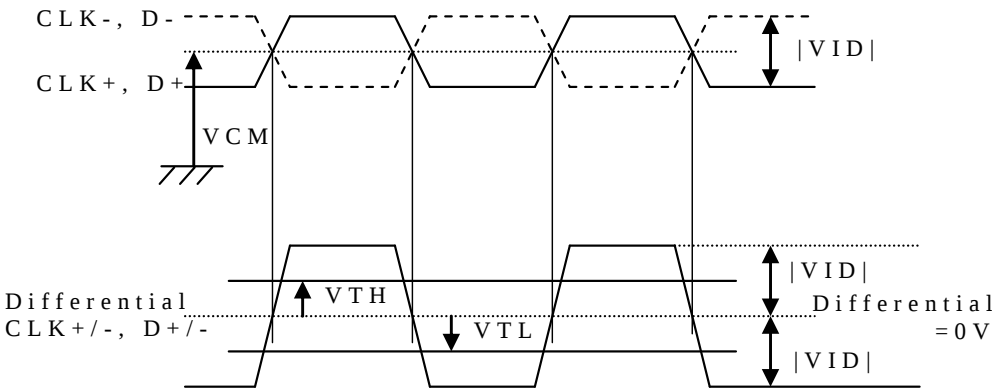


4.3.2 LED driver

(Ta= 25°C)

Parameter		Symbol	min.	typ.	max.	Unit	Remarks
Power supply voltage		VDDB	11.4	12.0	12.6	V	-
Power supply current		IDDB	-	4,100	5,200	mA	VDDB= 12.0V, At the maximum luminance control
Input voltage for signals	BRTI signal		VBI	0	-	1.0	V
	BRTP signal	High	VBPH	2.0	-	5.25	V
		Low	VBPL	0	-	0.8	V
	BRTC signal	High	VBCH	2.0	-	5.25	V
		Low	VBCL	0	-	0.8	V
	PWSEL signal	High	VBSH	2.0	-	5.25	V
		Low	VBSL	0	-	0.8	V
Input current for signals	BRTI signal		IBI	-300	-	-200	μA
	BRTP signal	High	IBPH	-	-	1,000	μA
		Low	IBPL	-600	-	-	μA
	BRTC signal	High	IBCH	-	-	300	μA
		Low	IBCL	-300	-	-	μA
	PWSEL signal	High	IPSH	-	-	1,000	μA
		Low	IPSL	-600	-	-	μA

☆

4.3.3 Current wave for LED driver

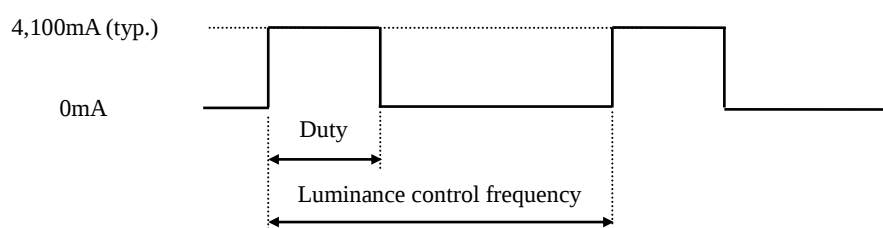

Duty: At the maximum luminance control 100% to at the minimum luminance control 1%.
 Luminance control frequency: 270Hz (typ.)

Note1: Luminance control frequency indicate the input pulse frequency, when select the external pulse control. See "**4.6.2 Detail of BRTP timing**".

Note2: The power supply lines (VDDB and GNDB) have large ripple voltage during luminance control. See "**4.3.4 Power supply voltage ripple**".

There is the possibility that the ripple voltage produces acoustic noise and signal wave noise in audio circuit and so on.

4.3.4 Power supply voltage ripple


This product works, even if the ripple voltage levels are beyond the permissible values as following the table, but there might be noise on the display image.

Power supply voltage		Ripple voltage (Measure at input terminal of power supply)	Note1 Unit
VDD	12.0V	≤ 100	mVp-p
VDDDB	12.0V	≤ 200	mVp-p


Note1: The permissible ripple voltage includes spike noise.

Example of the power supply connection

a) Separate the power supply



b) Put in the filter

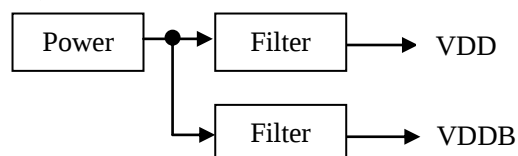


4.3.5 Fuse

Parameter	Fuse		Rating	Fusing current	Remarks
	Type	Supplier			
VDD	FCC16152ABTP	KAMAYA ELECTRIC Co., Ltd.	1.5A	3.0 A, 5 seconds maximum	Note1
			35V		
VDDb	CQ12LF010	CONQUER ELECTRONICS Co., Ltd.	10A	20 A, 5 seconds maximum	
			24V		

Note1: The power supply capacity should be more than the fusing current. If it is less than the fusing current, the fuse may not blow in a short time, and then nasty smell, smoke and so on may occur.

4.4 POWER SUPPLY VOLTAGE SEQUENCE

4.4.1 LCD panel signal processing board

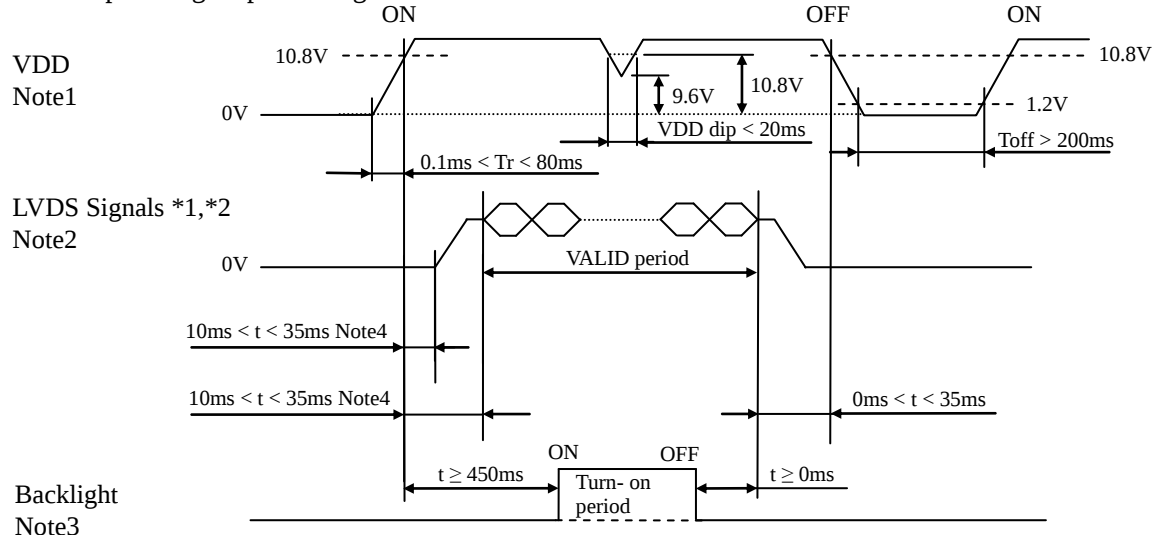

- *1: DA0+/-, DA1+/-, DA2+/-, DA3+/-, CKA+/-, DB0+/-, DB1+/-, DB2+/-, DB3+/- and CKB+/-
 *2: LVDS signals should be measured at the terminal of 100 Ω resistance.

Note1: If there is a voltage variation (voltage drop) at the rising edge of VDD below 10.8V, there is a possibility that a product does not work due to a protection circuit.


Note2: LVDS signals must be set to Low or High-impedance, except the VALID period (See above sequence diagram), in order to avoid the circuitry damage.

If some of signals are cut while this product is working, even if the signal input to it once again, it might not work normally. If a customer stops the display and function signals, VDD also must be shut down.

Note3: The backlight should be turned on within the turn-on period, in order to avoid unstable data display.

Note4: After turning VDD on, terminal voltages on LVDS input terminals (*1) will rise. This is caused by initial operation of the product.

4.4.2 LED driver

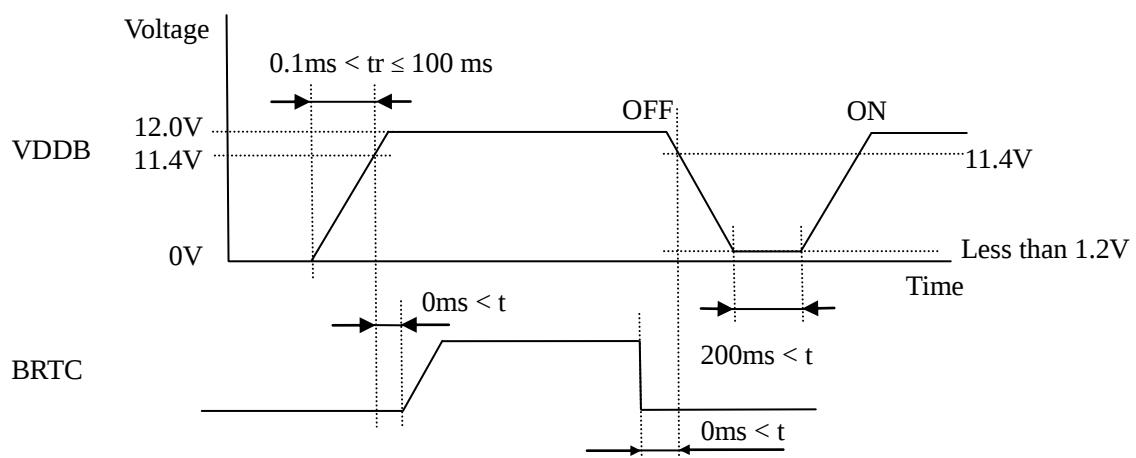

Note1: If tr is more than 100 ms, the backlight will be turned off by a protection circuit for LED driver.

Note2: When VDDDB is 0V or BRTC is Low, PWSEL must be set to Low or Open.

4.5 CONNECTIONS AND FUNCTIONS FOR INTERFACE PINS

4.5.1 LCD panel signal processing board

(1) CN1

CN1 socket (LCD module side): DF19G-30P-1H (56) (HIROSE ELECTRIC Co.,Ltd.)

Adaptable plug: DF19-30S-1C (HIROSE ELECTRIC Co.,Ltd.)

Pin No.	Symbol	Signal	Remarks							
1	DA0-	Pixel data A0	Odd pixel data input (LVDS DIFFERENTIAL DATA) Note1							
2	DA0+									
3	DA1-	Pixel data A1	Odd pixel data input (LVDS DIFFERENTIAL DATA) Note1							
4	DA1+									
5	DA2-	Pixel data A2	Odd pixel data input (LVDS DIFFERENTIAL DATA) Note1							
6	DA2+									
7	GND	Ground	Signal ground Note2							
8	CKA-	Pixel clock	Odd pixel clock input (LVDS DIFFERENTIAL DATA) Note1							
9	CKA+									
10	DA3-	Pixel data A3	Odd pixel data input (LVDS DIFFERENTIAL DATA) Note1							
11	DA3+									
12	DB0-	Pixel data B0	Even pixel data input (LVDS DIFFERENTIAL DATA) Note1							
13	DB0+									
14	GND	Ground	Signal ground Note2							
15	DB1-	Pixel data B1	Even pixel data input (LVDS DIFFERENTIAL DATA) Note1							
16	DB1+									
17	GND	Ground	Signal ground Note2							
18	DB2-	Pixel data B2	Even pixel data input (LVDS DIFFERENTIAL DATA) Note1							
19	DB2+									
20	CKB-	Pixel clock	Even pixel clock input (LVDS DIFFERENTIAL DATA) Note1							
21	CKB+									
22	DB3-	Pixel data B3	Even pixel data input (LVDS DIFFERENTIAL DATA) Note1							
23	DB3+									
24	GND	Ground	Signal ground Note2							
25	N.C.	-	Keep this pin Open.							
26	TxSEL1	Select LVDS data input map	Note3, Note4	<table><tr><td>TxSEL1</td><td>Mode</td></tr><tr><td>Open</td><td>A</td></tr><tr><td>Low</td><td>B</td></tr></table>	TxSEL1	Mode	Open	A	Low	B
TxSEL1	Mode									
Open	A									
Low	B									
27	GND	Ground	Signal ground Note2							
28	VDD	Power supply	12.0V Note2							
29	VDD									
30	VDD									

Note1: Twist pair wires with 100Ω (Characteristic impedance) should be used between LCD panel signal processing board and LVDS transmitter.

Note2: All GND terminals should be used without any non-connected lines.

Note3: This terminal is pulled-up in the product.

Note4: See "4.7 LVDS data input map."

4.5.2 LED driver

CN201 socket (LCD module side): DF3Z-10P-2H (2*) (HIROSE ELECTRIC Co.,Ltd.)

Adaptable plug: DF3-10S-2C (HIROSE ELECTRIC Co.,Ltd.)

Pin No.	Symbol	Function	Description
1	GNDB	LED driver ground	Note1
2	GNDB		
3	GNDB		
4	GNDB		
5	GNDB		
6	VDDDB	Power supply	Note1
7	VDDDB		
8	VDDDB		
9	VDDDB		
10	VDDDB		

Note1: All VDDDB and GNDB terminals should be used without any non-connected lines.

CN202 socket (LCD module side): 53261-0971 (molex)

Adaptable plug: 51021-0900 (molex)


Pin No.	Symbol	Function	Description
1	PWSEL	Selection of luminance control signal method	Note2, Note3
2	GNDB	LED driver ground	Note1
3	BRTP	BRTP signal	Note2
4	BRTI	Luminance control terminal	Note2
5	BRTH		
6	BRTC	Backlight ON/OFF control signal	High or Open: Backlight ON Low Backlight OFF
7	N.C.	-	Keep this pin Open.
8	GNDB	LED driver ground	Note1
9	GNDB		

Note1: All GNDB terminals should be used without any non-connected lines.

Note2: See "4.6 LUMINANCE CONTROL".


Note3: When VDDDB is 0V or BRTC is Low, PWSEL must be set to Low or Open.

4.5.3 Positions of socket

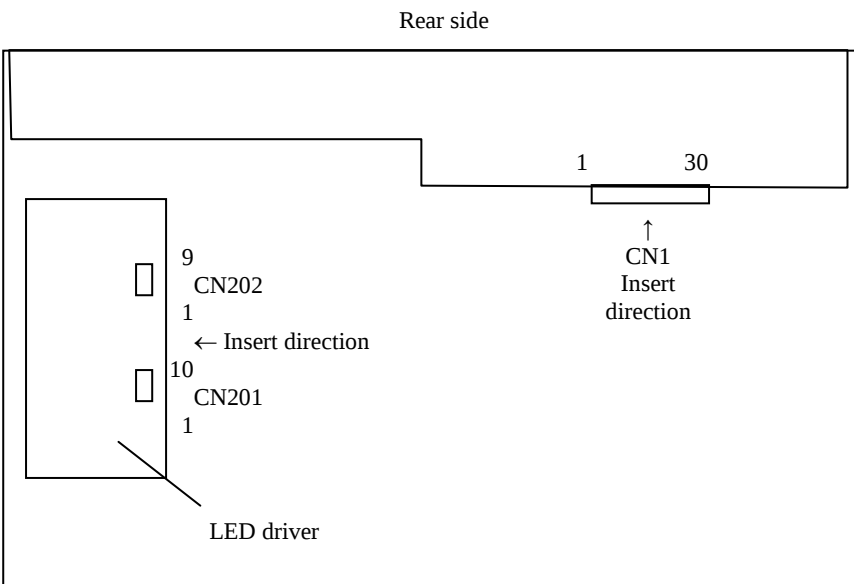

4.6 LUMINANCE CONTROL

4.6.1 Luminance control methods

Method	Adjustment and luminance ratio	PWSEL terminal	BRTP terminal						
Variable resistor control Note1	• Adjustment The variable resistor (R) for luminance control should be 10kΩ ±5%, 1/10W. Minimum point of the resistance is the minimum luminance and maximum point of the resistance is the maximum luminance. The resistor (R) must be connected between BRTH-BRTI terminals.  • Luminance ratio Note3 <table><tr><th>Resistance</th><th>Luminance ratio</th></tr><tr><td>0Ω</td><td>5% (typ.)</td></tr><tr><td>10kΩ</td><td>100%</td></tr></table>	Resistance	Luminance ratio	0Ω	5% (typ.)	10kΩ	100%	High or Open	Open
Resistance	Luminance ratio								
0Ω	5% (typ.)								
10kΩ	100%								
Voltage control Note1	• Adjustment Voltage control method works, when BRTH terminal is 0V and VBI voltage is input between BRTI-BRTH terminals. This control method can carry out continuation adjustment of luminance. Luminance is the maximum when BRTI terminal is Open • Luminance ratio Note3 <table><tr><th>BRTI Voltage (VBI)</th><th>Luminance ratio</th></tr><tr><td>0V</td><td>5% (typ.)</td></tr><tr><td>1.0V</td><td>100%</td></tr></table>	BRTI Voltage (VBI)	Luminance ratio	0V	5% (typ.)	1.0V	100%		
BRTI Voltage (VBI)	Luminance ratio								
0V	5% (typ.)								
1.0V	100%								
Pulse width modulation Note1 Note2 Note4	• Adjustment Pulse width modulation (PWM) method works, when PWSEL terminal is Low and PWM signal (BRTP signal) is input into BRTP terminal. The luminance is controlled by duty ratio of BRTP signal. • Luminance ratio Note3 <table><tr><th>Duty ratio</th><th>Luminance ratio</th></tr><tr><td>0.01</td><td>1% (typ.) (At frequency: 325 Hz)</td></tr><tr><td>1.0</td><td>100%</td></tr></table>	Duty ratio	Luminance ratio	0.01	1% (typ.) (At frequency: 325 Hz)	1.0	100%	Low	BRTP signal
Duty ratio	Luminance ratio								
0.01	1% (typ.) (At frequency: 325 Hz)								
1.0	100%								

Note1: In case of the variable resistor control method and the voltage control method, noises may appear on the display image depending on the input signals timing for LCD panel signal processing board.

Use PWM method, if interference noises appear on the display image!

Note2: The LED driver will stop working, if the Low period of BRTP signal is more than 50ms while BRTP signal is High or Open. Then the backlight will not turn on anymore, even if BRTP signal is input again. This is not out of order. The LED driver will start to work when power is supplied again.


Note3: These data are the target values.

Note4: See "4.6.2 Detail of BRTP timing".


4.6.2 Detail of B RTP timing

(1) Timing diagrams

• Outline chart

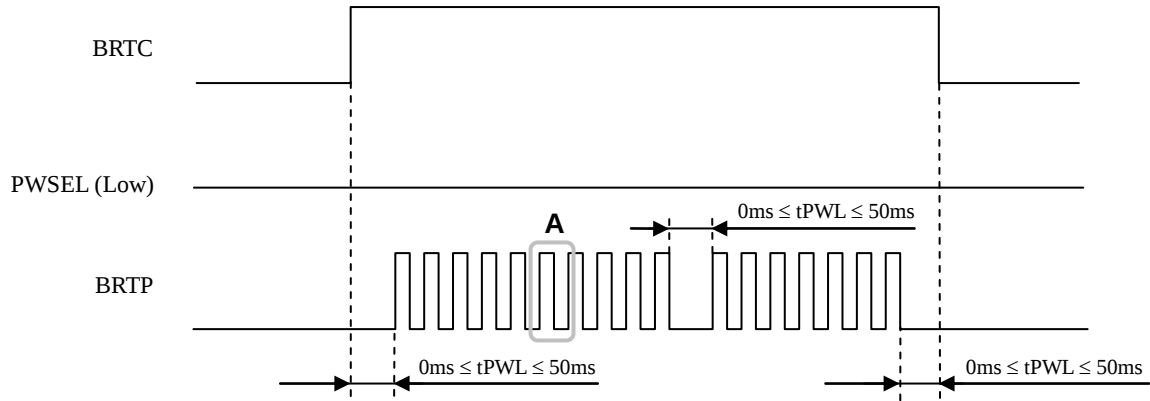

• Detail of A part

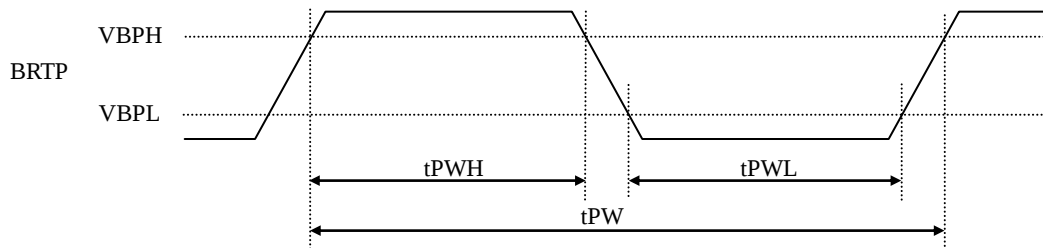

(2) Each parameter

Parameter	Symbol	min.	typ.	max.	Unit	Remarks
PWM frequency	f_{PWM}	185	-	1k	Hz	Note1,2,3
PWM duty ratio	DR_{PWM}	1	-	100	%	Note1,4,5
PWM pulse width	tPWH	30	-	-	μs	Note1,4,5

Note1: Definition of parameters is as follows.

$$f_{PWM} = \frac{1}{tPW}, \quad DR_{PWM} = \frac{tPWH}{tPW}$$

Note2: A recommended f_{PWM} value is as follows.

$$f_{PWM} = \frac{2n-1}{4} \times fv$$

(n= integer, fv= frame frequency of LCD module)


Note3: Depending on the frequency used, some noise may appear on the screen, please conduct a thorough evaluation.

Note4: While the BRTC signal is high, do not set the tPWH (PWM pulse width) is less than 30 μs . It may cause abnormal working of the backlight. In this case, turn the backlight off and then on again by BRTC signal.

Note5: Regardless of the PWM frequency, both PWM duty ratio and PWM pulse width must be always more than the minimum values.

4.7 LVDS data input map.


4.7.1 Mode A

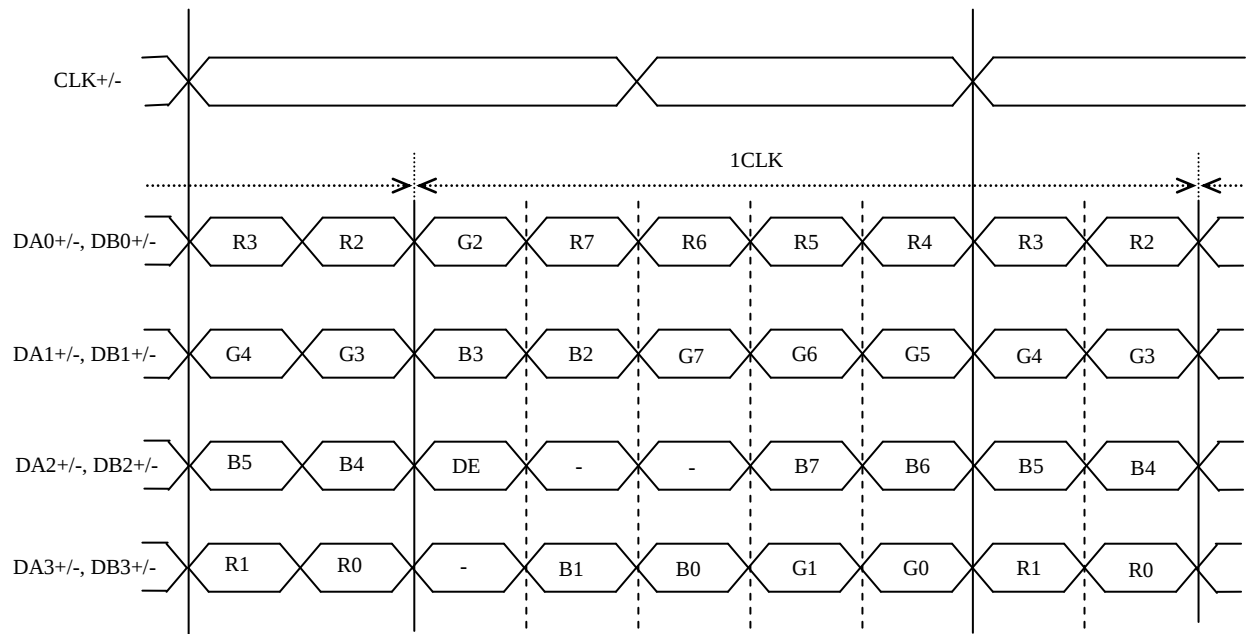

Note1: LSB (Least Significant Bit) – R0, G0, B0
MSB (Most Significant Bit) – R7, G7, B7

Note2: Twist pair wires with 100Ω (Characteristic impedance) should be used between LCD panel signal processing board and LVDS transmitter.

4.7.2 Mode B

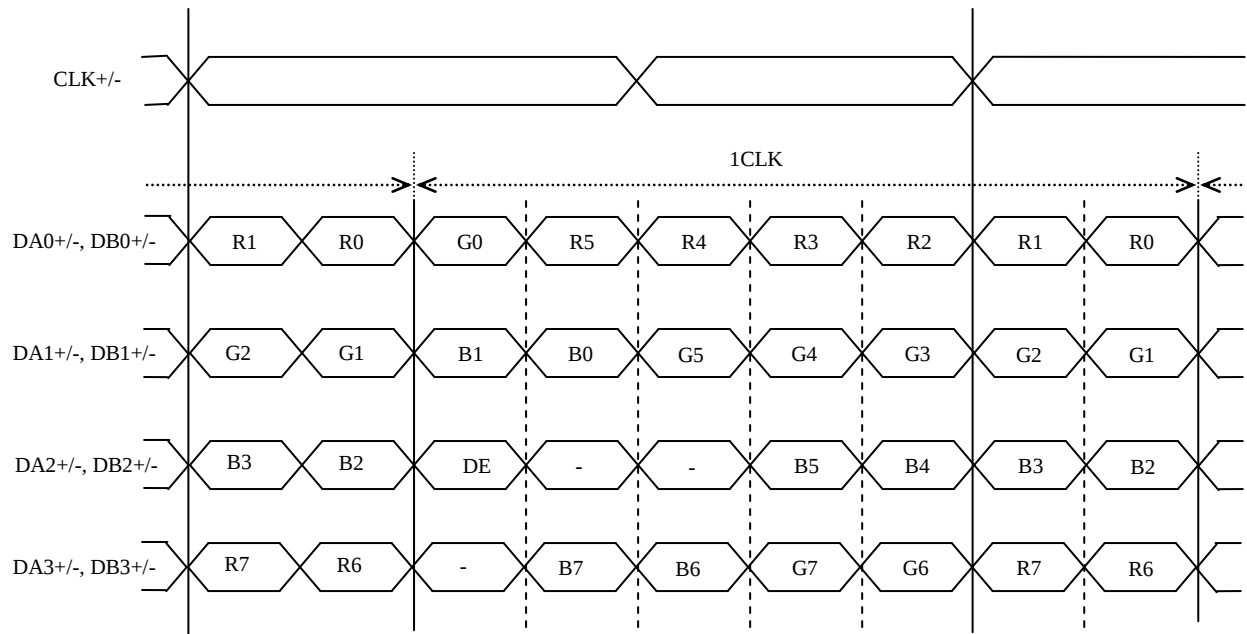

Note1: LSB (Least Significant Bit) – R0, G0, B0
MSB (Most Significant Bit) – R7, G7, B7

Note2: Twist pair wires with 100Ω (Characteristic impedance) should be used between LCD panel signal processing board and LVDS transmitter.

This product can display equivalent of 16,777,216 colors in 256 gray scales in each RGB sub-pixel. Also the relation between display colors and input data signals is as the following table.


Display colors		Data signal (0: Low level, 1: High level)															
		RA7 RA6 RA5 RA4 RA3 RA2 RA1 RA0	GA7 GA6 GA5 GA4 GA3 GA2 GA1 GA0	BA7 BA6 BA5 BA4 BA3 BA2 BA1 BA0													
		RB7 RB6 RB5 RB4 RB3 RB2 RB1 RB0	GB7 GB6 GB5 GB4 GB3 GB2 GB1 GB0	BB7 BB6 BB5 BB4 BB3 BB2 BB1 BB0													
Basic Colors	Black	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0													
	Blue	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1													
	Red	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0													
	Magenta	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1													
	Green	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0													
	Cyan	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1													
	Yellow	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0													
	White	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1													
Red gray scale	Black	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0 0 0 0 0 0 1 0	0 0	0 0													
	dark ↑ ↓	 : : 	 : : 	 : : 													
	bright	1 1 1 1 1 1 0 1 1 1 1 1 1 1 1 0 1 1 1 1 1 1 1 1	0 0	0 0													
	Red	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0													
Green gray scale	Black	0 0	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0 0 0 0 0 0 1 0	0 0													
	dark ↑ ↓	 : : 	 : : 	 : : 													
	bright	0 0	1 1 1 1 1 1 0 1 1 1 1 1 1 1 1 0 1 1 1 1 1 1 1 1	0 0													
	Green	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0													
Blue gray scale	Black	0 0	0 0	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0 0 0 0 0 0 1 0													
	dark ↑ ↓	 : : 	 : : 	 : : 													
	bright	0 0	0 0	1 1 1 1 1 1 0 1 1 1 1 1 1 1 1 0 1 1 1 1 1 1 1 1													
	Blue	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1													

4.9 INPUT SIGNAL TIMINGS


4.9.1 Timing characteristics

Parameter		Symbol	min.	typ.	max.	Unit	Remarks
CLK	Frequency	1/ tc	60.0	64.5	65.0	MHz	15.50ns (typ.)
	Pulse width	tc	15.38	15.5	-	ns	
Horizontal	Cycle	th	13.1	13.3	19.2	μs	-
			848	860	1,156	CLK	
	Display period	thd	800			CLK	-
Vertical	Cycle	1/tv	59	60	61	Hz	-
		tv	1,206	1,250	-	H	
	Display period	tvd	1,200			H	-

4.9.2 Input signal timing chart

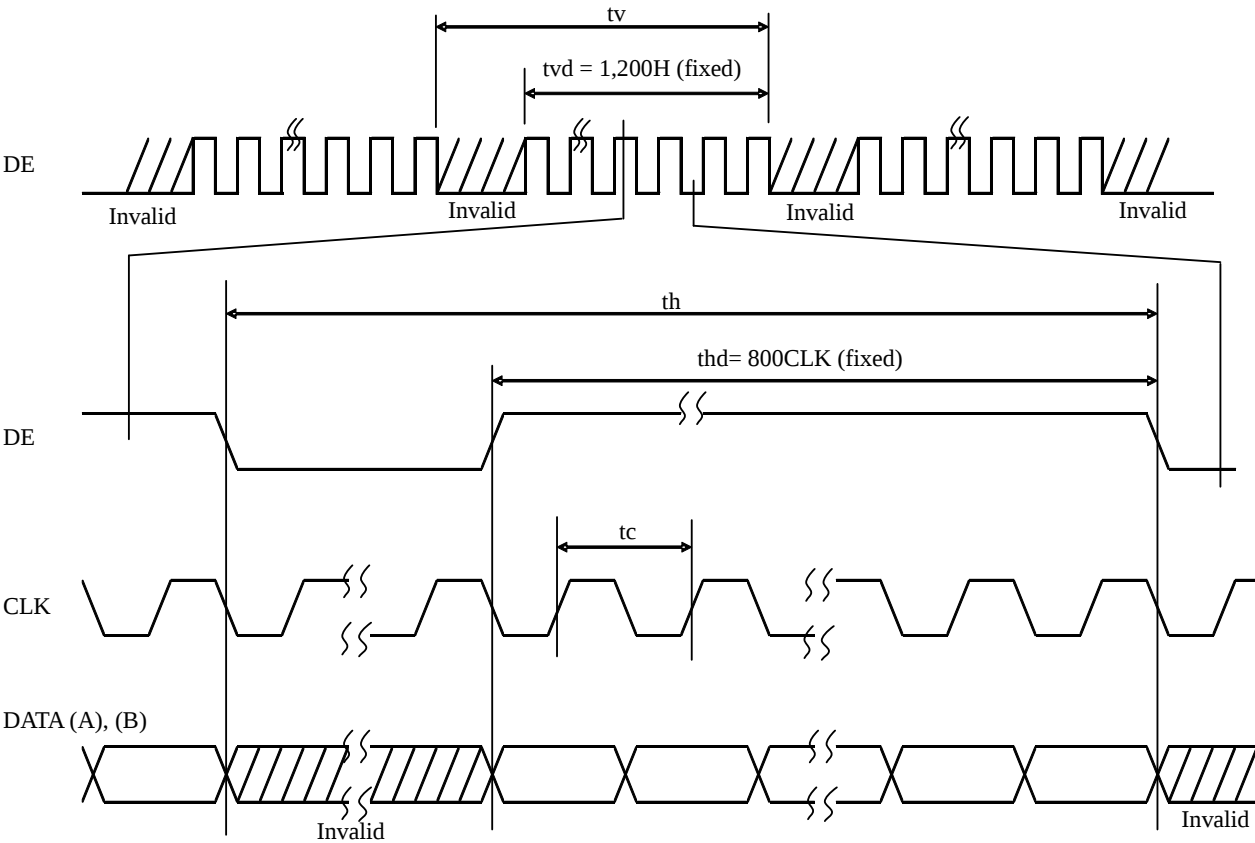


4.10 LVDS DATA TARANSMISSION METHOD

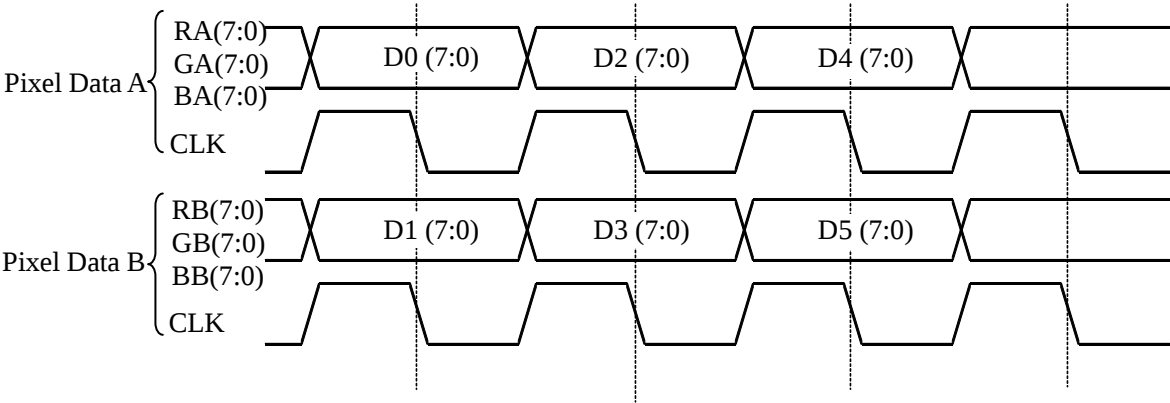


4.11 LVDS Rx AC SPEC

Symbol	Parameter	min.	typ.	max.	Units
t_{RCIP}	CKy_+ Period	15.385	-	16.667	ns
t_{RCIH}	CKy_+ High pulse width	-	$\frac{4}{7} t_{RCIP}$	-	ns
t_{RCIL}	CKy_+ Low pulse width	-	$\frac{3}{7} t_{RCIP}$	-	ns
t_{RMG}	Receiver Data Input Margin CLK= 65MHz	-0.4	-	0.4	ns
t_{RIP1}	Input Data Position0	$- t_{RMG} $	0.0	$+ t_{RMG} $	ns
t_{RIP0}	Input Data Position1	$\frac{t_{RCIP}}{7} - t_{RMG} $	$\frac{t_{RCIP}}{7}$	$\frac{t_{RCIP}}{7} + t_{RMG} $	ns
t_{RIP6}	Input Data Position2	$2\frac{t_{RCIP}}{7} - t_{RMG} $	$2\frac{t_{RCIP}}{7}$	$2\frac{t_{RCIP}}{7} + t_{RMG} $	ns
t_{RIP5}	Input Data Position3	$3\frac{t_{RCIP}}{7} - t_{RMG} $	$3\frac{t_{RCIP}}{7}$	$3\frac{t_{RCIP}}{7} + t_{RMG} $	ns
t_{RIP4}	Input Data Position4	$4\frac{t_{RCIP}}{7} - t_{RMG} $	$4\frac{t_{RCIP}}{7}$	$4\frac{t_{RCIP}}{7} + t_{RMG} $	ns
t_{RIP3}	Input Data Position5	$5\frac{t_{RCIP}}{7} - t_{RMG} $	$5\frac{t_{RCIP}}{7}$	$5\frac{t_{RCIP}}{7} + t_{RMG} $	ns
t_{RIP2}	Input Data Position6	$6\frac{t_{RCIP}}{7} - t_{RMG} $	$6\frac{t_{RCIP}}{7}$	$6\frac{t_{RCIP}}{7} + t_{RMG} $	ns

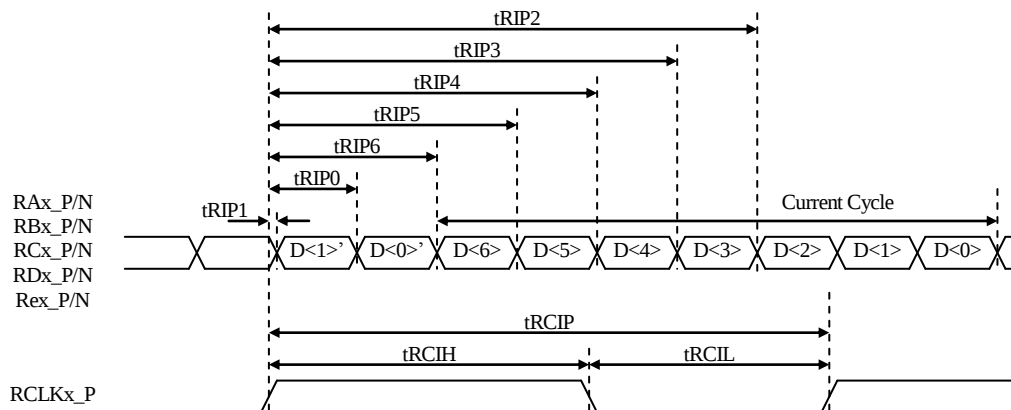

Odd pixel:	RA= R data	Even pixel:	RB= R data
	GA= G data		GB= G data
	BA= B data		BB= B data

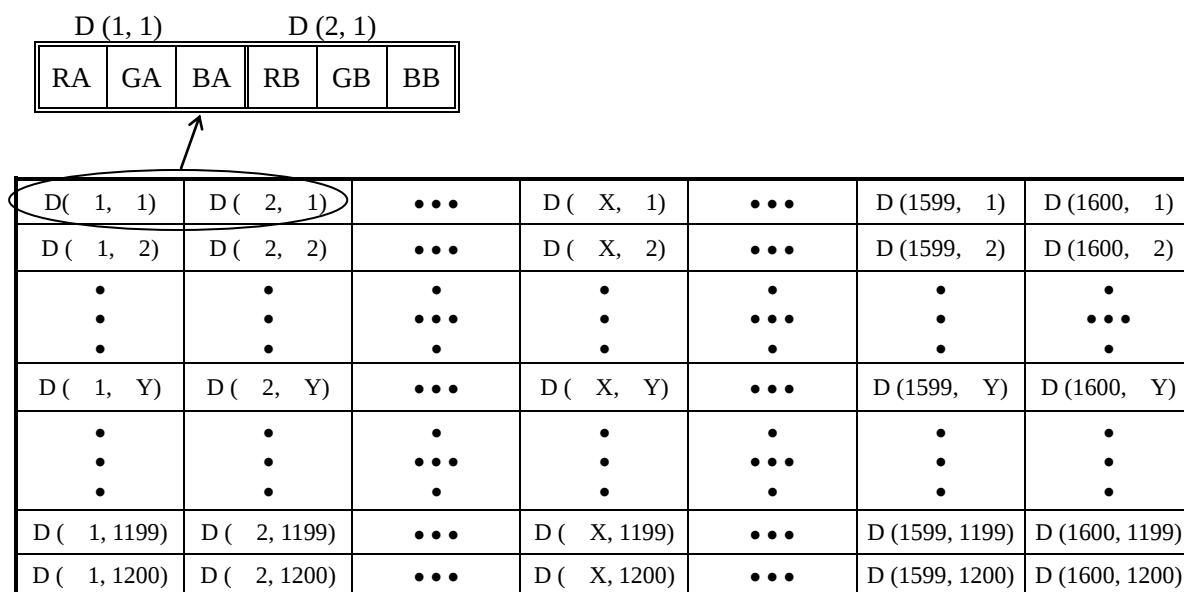

	1	2	1,600									
1	<table border="1"><tr><td>R</td><td>G</td><td>B</td></tr></table>	R	G	B	<table border="1"><tr><td>R</td><td>G</td><td>B</td></tr></table>	R	G	B	<table border="1"><tr><td>R</td><td>G</td><td>B</td></tr></table>	R	G	B
R	G	B										
R	G	B										
R	G	B										
	<table border="1"><tr><td>•</td><td>•</td><td>•</td></tr></table>	•	•	•	<table border="1"><tr><td>•</td><td>•</td><td>•</td></tr></table>	•	•	•	<table border="1"><tr><td>•</td><td>•</td><td>•</td></tr></table>	•	•	•
•	•	•										
•	•	•										
•	•	•										
1,200	<table border="1"><tr><td>R</td><td>G</td><td>B</td></tr></table>	R	G	B	<table border="1"><tr><td>R</td><td>G</td><td>B</td></tr></table>	R	G	B	<table border="1"><tr><td>R</td><td>G</td><td>B</td></tr></table>	R	G	B
R	G	B										
R	G	B										
R	G	B										

4.14 OPTICS

4.14.1 Optical characteristics

(Note1, Note2)


Parameter		Condition	Symbol	min.	typ.	max.	Unit	Measuring instrument	Remarks
Luminance		White at center θR= 0°, θL= 0°, θU= 0°, θD= 0°	L	670	900	-	cd/m ²	BM-5A or SR-3	Note3
Contrast ratio		White/Black at center θR= 0°, θL= 0°, θU= 0°, θD= 0°	CR	1,000	1,400	-	-	BM-5A or SR-3	Note3 Note5
Luminance uniformity		White θR= 0°, θL= 0°, θU= 0°, θD= 0°	LU	80	-	-	%	BM-5A or SR-3	Note4 Note6
Chromaticity	White	x coordinate	Wx	0.269	0.299	0.329	-	SR-3	Note3 Note7
		y coordinate	Wy	0.285	0.315	0.345	-		
	Red	x coordinate	Rx	-	0.65	-	-		
		y coordinate	Ry	-	0.33	-	-		
	Green	x coordinate	Gx	-	0.29	-	-		
		y coordinate	Gy	-	0.60	-	-		
	Blue	x coordinate	Bx	-	0.15	-	-		
		y coordinate	By	-	0.07	-	-		
Color gamut		θR= 0°, θL= 0°, θU= 0°, θD= 0° at center, against NTSC color space	C	65	72	-	%	SR-3	Note3
Response time		Black to White	Ton	-	20	30	ms	BM-5A -10000	Note8 Note9
		White to Black	Toff	-	20	30	ms		
Viewing angle	Right	θU= 0°, θD= 0°, CR≥ 10	θR	70	88	-	°	EZ Contrast	Note3 Note10
	Left	θU= 0°, θD= 0°, CR≥ 10	θL	70	88	-	°		
	Up	θR= 0°, θL= 0°, CR≥ 10	θU	70	88	-	°		
	Down	θR= 0°, θL= 0°, CR≥ 10	θD	70	88	-	°		

Note1: These are initial characteristics.

Note2: Measurement conditions are as follows.

Ta= 25°C, VDD= 12.0V, VDDB= 12.0V, PWM duty ratio: 100%, Display mode: UXGA,
Horizontal cycle= 1/75.19 kHz, Vertical cycle= 1/60.0Hz

Optical characteristics are measured at luminance saturation 20minutes after the product works in the dark room. Also measurement methods are as follows.

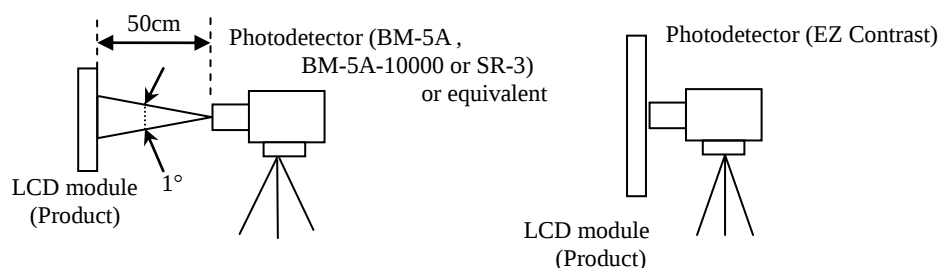

Note3: Product surface temperature TopF= 32°C, TopR= 43°C (at the maximum luminance control)

Note4: Product surface temperature TopF= 30°C, TopR= 38°C (at the product luminance 450cd/m²)

LU is measured under the condition of temperature differences in the display area are less than 10°C.

Note5: See "4.14.2 Definition of contrast ratio".

Note6: See "4.14.3 Definition of luminance uniformity".

Note7: These coordinates are found on CIE 1931 chromaticity diagram.

Note8: See "4.14.4 Definition of response times".

Note9: Product surface temperature TopF= 35°C

Note10: See "4.14.5 Definition of viewing angles".

4.14.2 Definition of contrast ratio

The contrast ratio is calculated by using the following formula.


$$\text{Contrast ratio (CR)} = \frac{\text{Luminance of white screen}}{\text{Luminance of black screen}}$$

4.14.3 Definition of luminance uniformity

The luminance uniformity is calculated by using following formula.


$$\text{Luminance uniformity (LU)} = \frac{\text{Minimum luminance from ① to ⑨}}{\text{Maximum luminance from ① to ⑨}}$$

The luminance is measured at near the 9 points shown below.

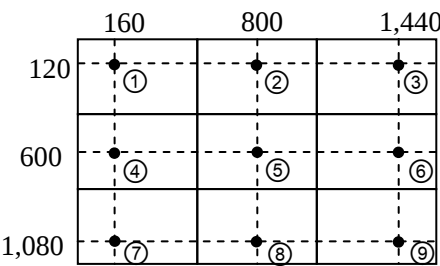


4.14.4 Definition of response times

Response time is measured at the time when the luminance changes from "black" to "white", or "white" to "black" on the same screen point, by photo-detector. Ton is the time when the luminance changes from 10% up to 90%. Also Toff is the time when the luminance changes from 90% down to 10% (See the following diagram.).

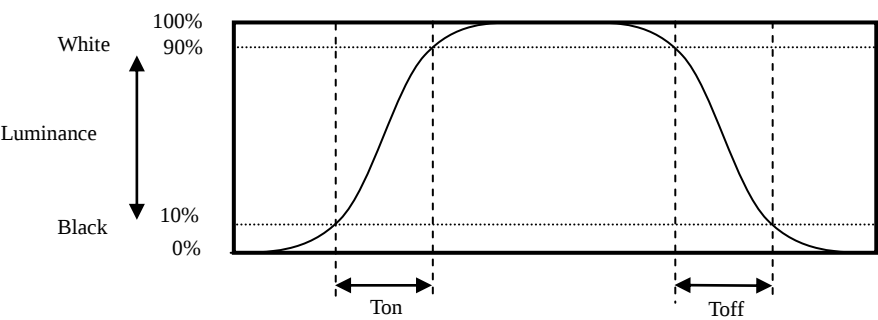

4.14.5 Definition of viewing angles

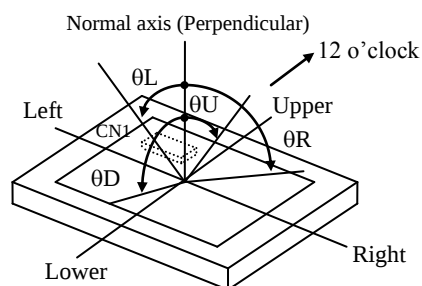

5. ESTIMATED LUMINANCE LIFETIME

The luminance lifetime is the time from initial luminance to half-luminance.

This lifetime is the estimated value, and is not guarantee value.

Condition		Estimated luminance lifetime (Life time expectancy) Note1, Note2, Note3	Unit
LED elementary substance	25°C (Ambient temperature of the product) Continuous operation, PWM duty ratio: 100%	70,000	h
	60°C (Temperature of the product front or rear panel) Continuous operation, PWM duty ratio: 100%	60,000	

Note1: Life time expectancy is mean time to half-luminance.

Note2: Estimated luminance lifetime is not the value for LCD module but the value for LED elementary substance.

Note3: By ambient temperature, the lifetime changes particularly. Especially, in case the product works under high temperature environment, the lifetime becomes short.


6. RELIABILITY TESTS

Test item		Condition	Judgment	Note1
High temperature and humidity (Operation)		① $60 \pm 2^{\circ}\text{C}$, RH= 60%, 240hours ② Display data is white. Note2	No display malfunctions	
Heat cycle (Operation)		① $0 \pm 3^{\circ}\text{C}$ 1hour $60 \pm 3^{\circ}\text{C}$ 1hour ② 50cycles, 4hours/cycle ③ Display data is white. Note2		
Thermal shock (Non operation)		① $-20 \pm 3^{\circ}\text{C}$ 30minutes $60 \pm 3^{\circ}\text{C}$ 30minutes ② 100cycles, 1hour/cycle ③ Temperature transition time is within 5 minutes.		
Vibration (Non operation)		① 5 to 100Hz, 11.76m/s^2 ② 1 minute/cycle ③ X, Y, Z directions ④ 10 times each directions	No display malfunctions No physical damages	
Mechanical shock (Non operation)		① 294m/s^2 , 11ms ② $\pm\text{X}$, $\pm\text{Y}$, $\pm\text{Z}$ directions ③ 3 times each directions		
ESD (Operation)		① 150pF, 150Ω , $\pm 10\text{kV}$ ② 9 places on a panel surface Note3 ③ 10 times each places at 1 sec interval	No display malfunctions	
Low pressure	Non-operation	① 15kPa (Equivalent to altitude 13,600m) ② $-20^{\circ}\text{C} \pm 3^{\circ}\text{C}$ 24 hours ③ $+60^{\circ}\text{C} \pm 3^{\circ}\text{C}$ 24 hours	No display malfunctions	
	Operation	① 53.3kPa (Equivalent to altitude 5,100m) ② $0^{\circ}\text{C} \pm 3^{\circ}\text{C}$ 24 hours ③ $+55^{\circ}\text{C} \pm 3^{\circ}\text{C}$ 24 hours Note2		

Note1: Display and appearance are checked under environmental conditions equivalent to the inspection conditions of defect criteria.

Note2: Luminance 450cd/m^2

Note3: See the following figure for discharge points

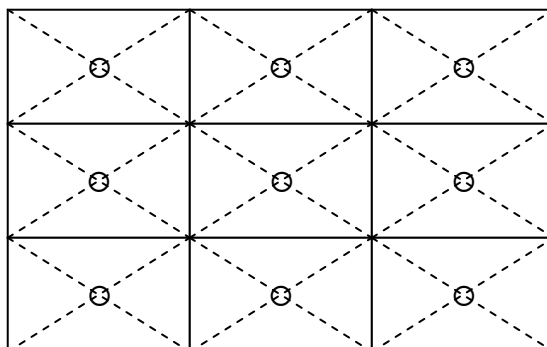

7. PRECAUTIONS

7.1 MEANING OF CAUTION SIGNS

The following caution signs have very important meaning. **Be sure to read "7.2 CAUTIONS" and "7.3 ATTENTIONS"!**



This sign has the meaning that a customer will be injured or the product will sustain damage if the customer practices wrong operations.



This sign has the meaning that a customer will be injured if the customer practices wrong operations.

7.2 CAUTIONS




*** Do not shock and press the LCD panel and the backlight! There is a danger of breaking, because they are made of glass. (Shock: Equal to or no greater than 294m/s^2 and equal to or no greater than 11ms, Pressure: Equal to or no greater than 19.6N ($\phi 16\text{mm}$ jig))**



7.3 ATTENTIONS

7.3.1 Handling of the product

- ① Take hold of both ends without touching the circuit board when the product (LCD module) is picked up from inner packing box to avoid broken down or misadjustment, because of stress to mounting parts on the circuit board.
- ② Do not hook or pull cables such as lamp cable, and so on, in order to avoid any damage.
- ③ When the product is put on the table temporarily, display surface must be placed downward.
- ④ When handling the product, take the measures of electrostatic discharge with such as earth band, ionic shower and so on, because the product may be damaged by electrostatic.
- ⑤ The torque for product mounting screws must never exceed $0.735\text{N}\cdot\text{m}$. Higher torque might result in distortion of the bezel. And the length of product mounting screws must be $\leq 5.0\text{mm}$.
- ⑥ The product must be installed using mounting holes without undue stress such as bends or twist (See outline drawings). And do not add undue stress to any portion (such as bezel flat area). Bends or twist described above and undue stress to any portion may cause display mura.
Recommended installing method: Ideal plane "A" is defined by one mounting hole (datum point) and other mounting holes. The ideal plane "A" should be the same plane within $\pm 0.3\text{ mm}$.

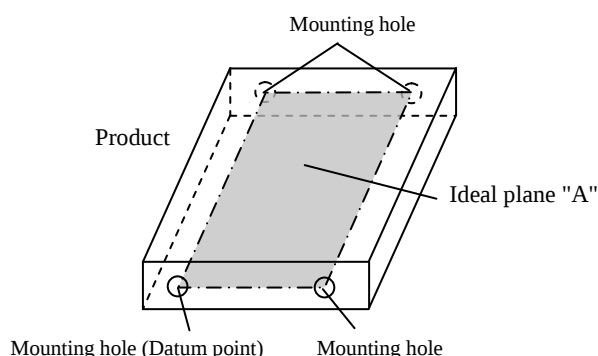

- ⑦ Do not press or rub on the sensitive product surface. When cleaning the product surface, wipe it with a soft dry cloth.
- ⑧ Do not push or pull the interface connectors while the product is working.
- ⑨ When handling the product, use of an original protection sheet on the product surface (polarizer) is recommended for protection of product surface. Adhesive type protection sheet may change color or characteristics of the polarizer.
- ⑩ Usually liquid crystals don't leak through the breakage of glasses because of the surface tension of thin layer and the construction of LCD panel. But, if you contact with liquid crystal by any chance, please wash it away with soap and water.

7.3.2 Environment

- ① Do not operate or store in high temperature, high humidity, dewdrop atmosphere or corrosive gases. Keep the product in packing box with antistatic pouch in room temperature to avoid dusts and sunlight, when storing the product.
- ② In order to prevent dew condensation occurred by temperature difference, the product packing box must be opened after enough time being left under the environment of an unpacking room. Evaluate the storage time sufficiently because dew condensation is affected by the environmental temperature and humidity. (Recommended leaving time: 6 hours or more with the original packing state after a customer receives the package)
- ③ Do not operate in high magnetic field. If not, circuit boards may be broken.
- ④ This product is not designed as radiation hardened.

7.3.3 Characteristics


The following items are neither defects nor failures.

- ① Response time, luminance and color may be changed by ambient temperature.
- ② Display mura, flickering, vertical streams or tiny spots may be observed depending on display patterns.
- ③ Do not display the fixed pattern for a long time because it may cause image sticking. Use a screen saver, if the fixed pattern is displayed on the screen.
- ④ The display color may be changed depending on viewing angle because of the use of condenser sheet in the backlight.
- ⑤ Optical characteristics may be changed depending on input signal timings.

7.3.4 Others

- ① All GND, GNDB, VDD and VDDDB terminals should be used without any non-connected lines.
- ② Do not disassemble a product or adjust variable resistors.
- ③ Pack the product with the original shipping package, in order to avoid any damages during transportation, when returning the product to NLT.
- ④ The LCD module by itself or integrated into end product should be packed and transported with display in the vertical position. Otherwise the display characteristics may be degraded.

8.2 REAR VIEW

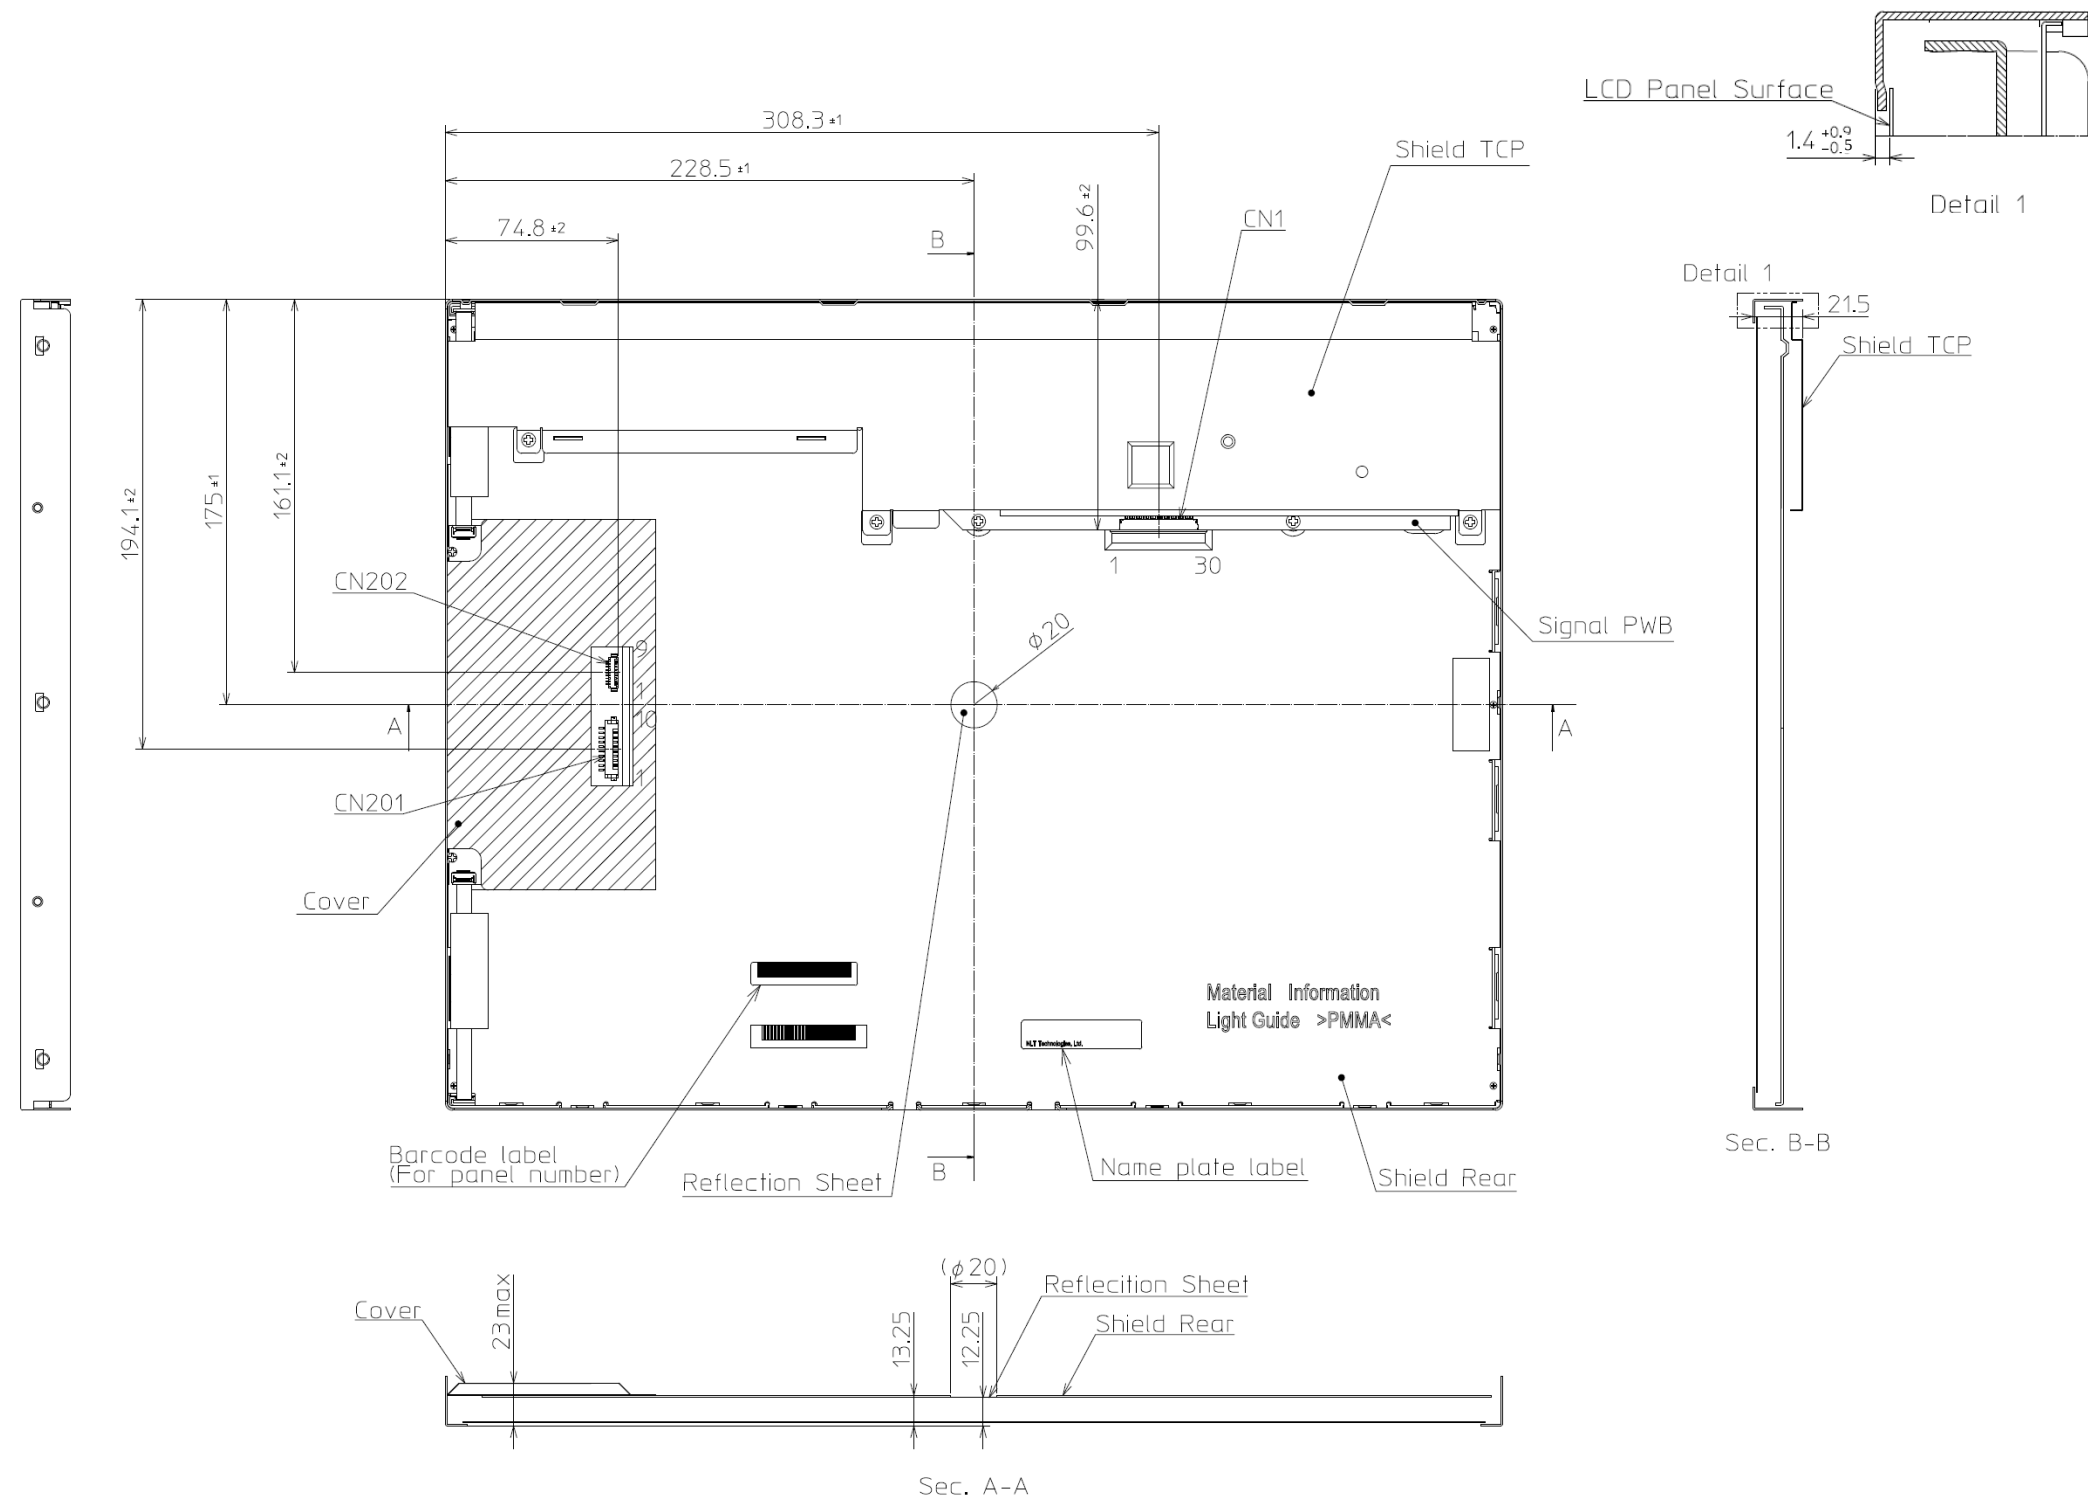

- Note1: Not shown tolerances of the dimensions are $\pm 0.5\text{mm}$.
Note2: The torque for product mounting screws must never exceed 0.735N·m.
Note3: The length of product mounting screws from surface of plate must be $\leq 5.0\text{mm}$.
Note4: The values in parentheses are for reference.

Unit: mm