


FROM	TO
P1-1	P2-1
P1-6	P2-2
P1-7	P2-3
P1-8	P2-4
P1-9	P2-5
P1-10	P2-6

This connector interfaces with the LED Driver output connector

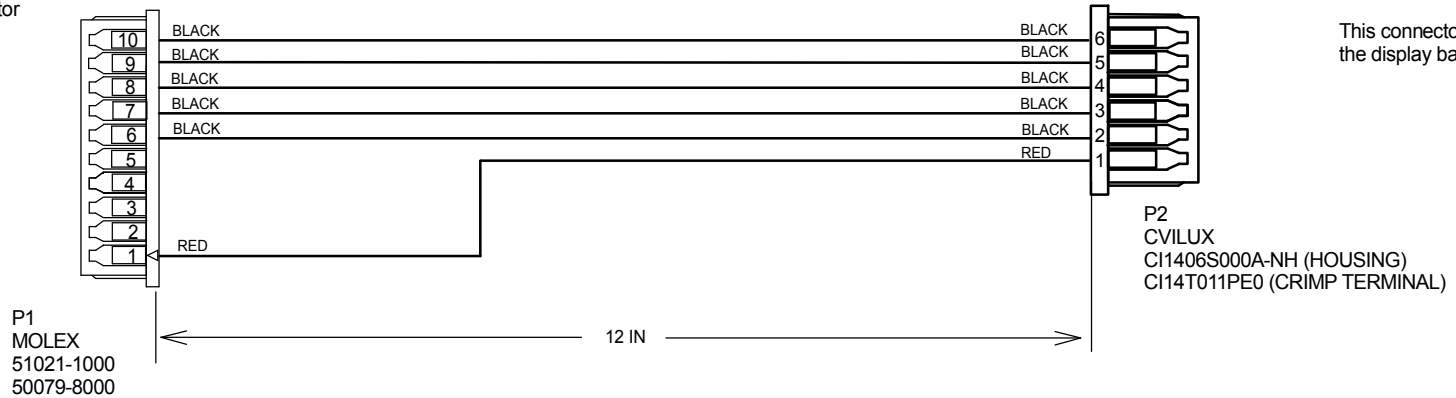

This connector interfaces with the display backlight connector

BOM REF.	QTY	MANUFACTURER	P/N	DESCRIPTION
P1	1	MOLEX	51021-1000	CONNECTOR HOUSING, 8 CIRCUIT
P1	6	MOLEX	50079-8000	CONTACT SOCKET (NOT SHOWN)
P2	1	CVILUX	C1406S000A-NH	CONNECTOR HOUSING, 6 CIRCUIT
P2	6	CVILUX	C14T011PE0	CRIMP TERMINAL, 28 - 32 AWG (NOT SHOWN)
WIRE	AR	ALPHA WIRE OR EQUIVALENT	1852	WIRE, 28 (7/36) AWG, PVC 105C, MAX OD OF INSULATION = 0.037 INCHES

Cable Assembly, Output, RoHS Compliant
Connects ACI-E060400-2690/2691 Driver to
AUO G215HVN01.0 21.5" Display, X-4205A

LABEL INSTRUCTIONS

SD-0550

DRAWING NOT TO SCALE

APPLIED CONCEPTS, INC.

SHEET 1 OF 1, 07/14/15

27-R0233