

10.4" XGA DUAL MODE (DAY & NVIS) ENHANCED LED BACKLIT DISPLAY SOLUTION

Sunlight Readability/MIL-STD-3009 NVIS White Operation/Very Wide Range Dimming

GENERAL DESCRIPTION

The ACD-NVIS104-3196 consists of the Innolux G104XCE-L01 10.4" XGA TFT display, modified with a high performance LED backlight capable of Day and NVIS White Operation.

Customer Consigned Panel

Performance at given luminance levels

750 cd/m² with 11.2 watts LED power (Day)

2.9 cd/m² with 1.4 watts LED power (NVIS)

The "NVIS White" enhancement portion of this display solution, is intended to be capable of compliance per MIL-STD-3009 for Electronic and electro-optical displays (multi-color), Type 1, Class A or Class B. Other post enhancements placed in front of the LCD glass, can have an affect on the final Luminance & Chromaticity results.

LCD PANEL HIGHLIGHTS

10.4" TFT Active Matrix Color

210.4mm(H) x 157.8mm(V) viewable area

225.5mmh(H) x 176.3mm(V) x 8.7mm(D) physical size

XGA 1024 x 768 pixels, 16.7M colors


1000:1 typical contrast ratio

Display Mode, Normally Black

Surface Treatment: Anti-Glare

For complete LCD specification (standard panel), refer to the datasheet Innolux G104XCE-L01

9/14/2023

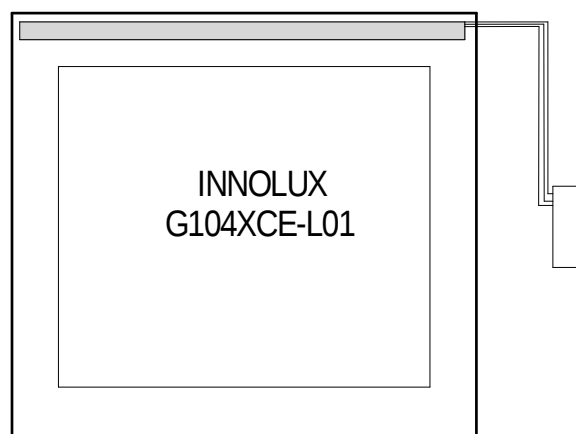

LED BACKLIGHT FEATURES

Single Edge Day and NVIS LED rail

Single connector allows simple interconnect with LED driver¹

Projected lifetime > 75,000 hours

Designed to be driven by constant current, selectable dual output LED backlight driver ¹

¹ For best power transfer and control, use ACI ID3 Dual Mode LED Driver ACI-3197.

PRODUCT DATA SHEET

MAXIMUM RATINGS*

9/14/2023

Symbol	Parameter	Value	Unit
Top ¹	Operating temperature of display (center of panel surface)	-30 to +85	Deg-C
Tled	Operating temperature of LED edge light (light rail contact)	-30 to +95	Deg-C
Tstg ¹	Display storage temperature	-30 to +85	Deg-C
IfwdD	LED forward current (Day)	120	mA
IfwdN	LED forward current (NVIS)	30	mA

*Maximum Ratings are those values beyond which damage may occur

¹Per Manufacturer's Specification

PANEL/BACKLIGHT OPTICAL CHARACTERISTICS

Ifwd(Day) = 100mA per bank, 2 banks per rail, 1 rail per display, Ifwd(NVIS) = 25mA per bank, 1 bank per rail, 1 rail per display, LED rails: ACR-3199, Ta = +25 Deg-C moving air (36 CFM), LCD displaying full-white image, minimum 2 hour soak.

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Bpd	Panel Luminance (Day)		600	750		cd/m ²
Bpn	Panel Luminance (NVIS)			2.9		cd/m ²
u'd	White u' coordinate (DAY)			0.201		-
v'd	White v' coordinate (DAY)			0.480		-
Rd	White radius error (DAY)				0.040	-
u'n	White u' coordinate (NVIS)			0.190		-
v'n	White v' coordinate (NVIS)			0.490		-
Rn	White radius error (NVIS)				0.040	-

LED EDGE-LIGHT ELECTRICAL CHARACTERISTICS


Ifwd(Day) = 100mA, Ifwd(NVIS) = 25mA, Top = +25Deg-C

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Vfwd	LED rail forward voltage drop (Day mode)		50	56	62	Vdc
Vfwd	LED rail forward voltage drop (NVIS)		48	54	60	Vdc

CIE 1976 UCS CHROMATICITY DIAGRAM

9/14/2023

NVIS WHITE coordinates per MIL-STD-3009: $u'=0.190$, $v'=0.490$, $r=0.04$

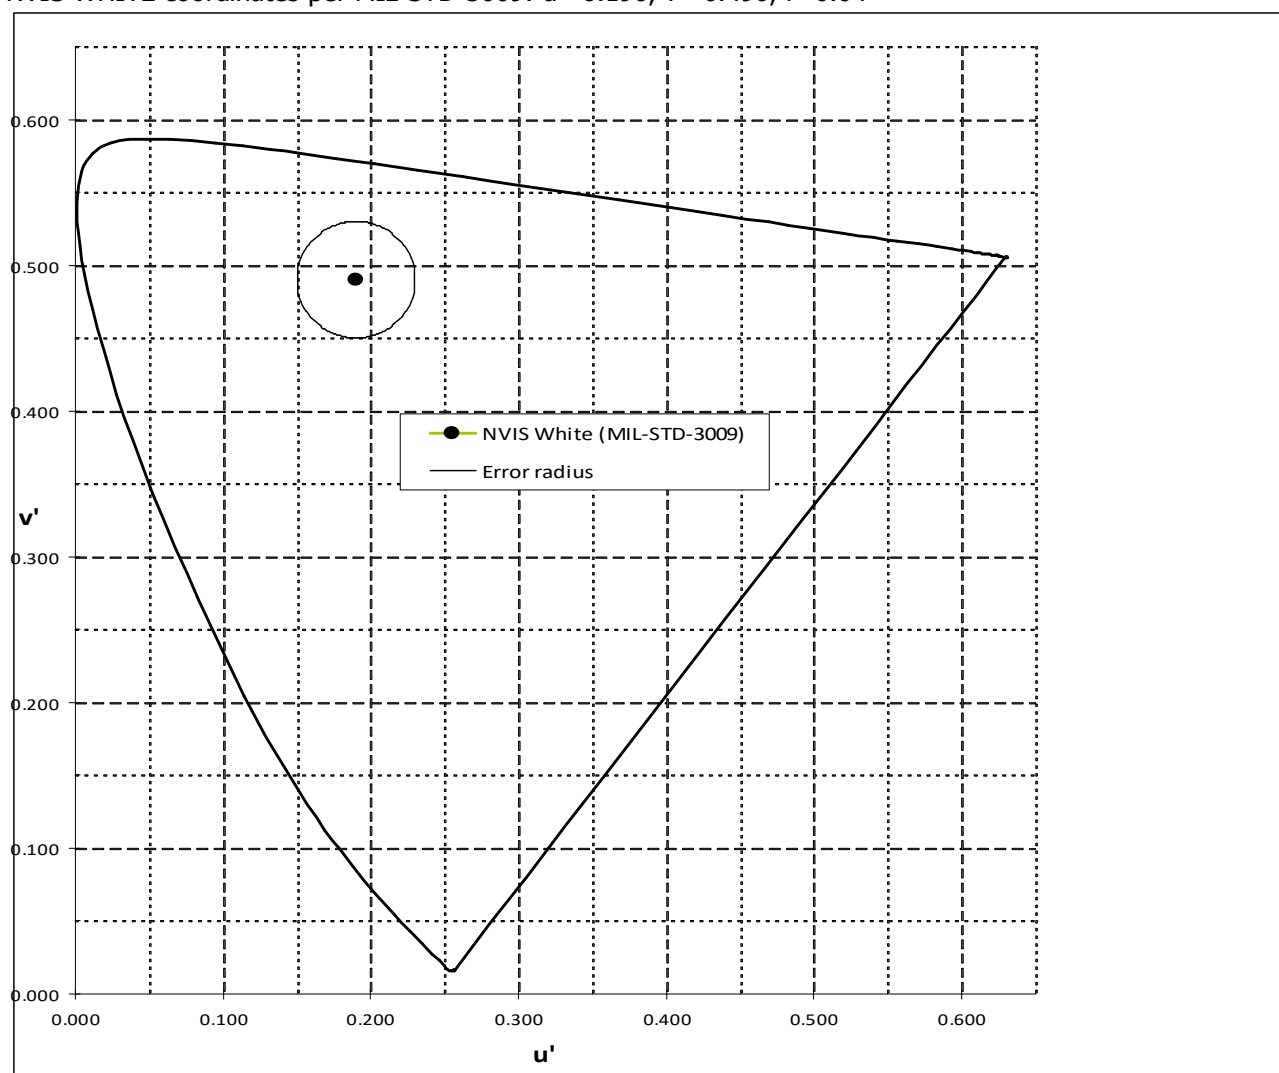


PRODUCT DATA SHEET




TYPICAL LCD/LED BACKLIGHT PERFORMANCE GRAPHS

9/14/2023

Day

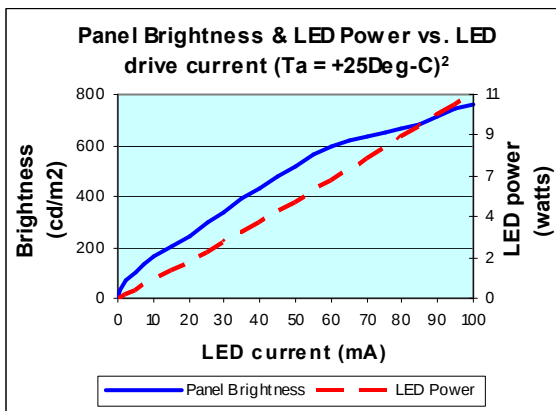

NVIS

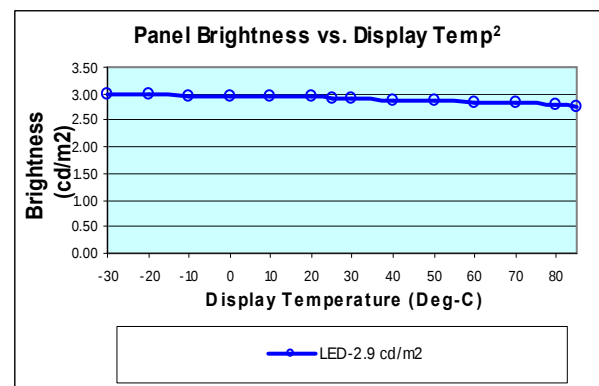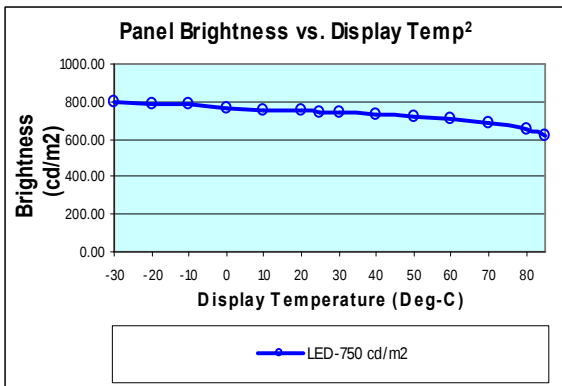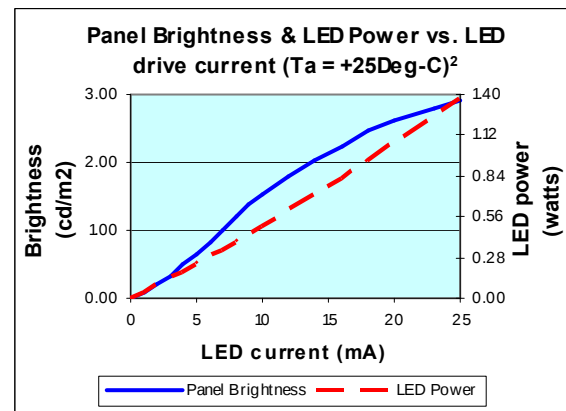

² Moving air (36.0 CFM)