

PRODUCT DATA SHEET

17.3" FHD DUAL MODE (DAY & NVIS) ENHANCED LED BACKLIT DISPLAY SOLUTION

Sunlight Readability/MIL-STD-3009 NVIS White Operation/Very Wide Range Dimming

GENERAL DESCRIPTION


12/14/2021

The ACD-NVIS173-3165 consists of the AUO G173HW01 V0 17.3" FHD TFT display, modified with a high performance LED backlight capable of Day and NVIS White Operation.

Performance at given luminance levels

1200 cd/m² with 30.5 watts LED power (Day)
9 cd/m² with 9.0 watts LED power (NVIS)

The "NVIS White" enhancement portion of this display solution, is intended to be capable of compliance per MIL-STD-3009 for Electronic and electro-optical displays (multi-color), Type 1, Class A or Class B. Other post enhancements placed in front of the LCD glass, can have an affect on the final Luminance & Chromaticity results.

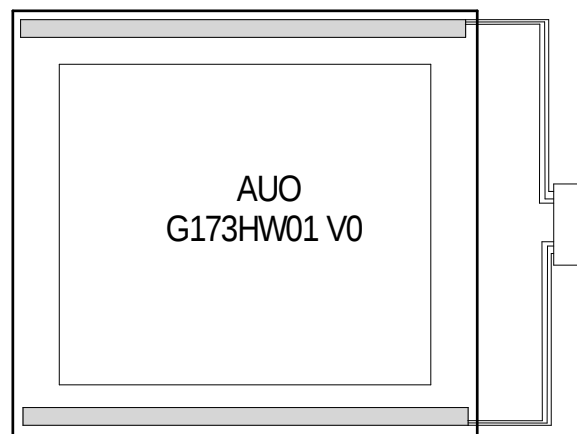

LCD PANEL HIGHLIGHTS

17.3" TFT Active Matrix Color
381.888mm(H) x 214.812mm(V) viewable area
403.0mm(W) x 240.0mm(H) x 17.0mm(D) physical size
FHD 1920(3) x 1080 pixels, 16.7M colors
600:1 typical contrast ratio
Display Mode, Normally White
Surface Treatment: Hard Coating(3H), Glare Treatment

For complete LCD specification (standard panel), refer to the datasheet AUO G173HW01 V0

LED BACKLIGHT FEATURES

Dual Edge Day and NVIS LED rails
Single connector allows simple interconnect with LED driver¹
Projected lifetime > 75,000 hours
Designed to be driven by constant current, selectable dual output LED backlight driver ¹

¹ For best power transfer and control, use ACI-3168 Dual Mode LED Driver.

PRODUCT DATA SHEET

MAXIMUM RATINGS*

12/14/2021

Symbol	Parameter	Value	Unit
Top ¹	Operating temperature of display (center of panel surface)	0 to +70	Deg-C
Tled	Operating temperature of LED edge light (light rail contact)	-30 to +95	Deg-C
Tstg ¹	Display storage temperature	-20 to +70	Deg-C
IfwdD	LED forward current (Day)	65	mA
IfwdN	LED forward current (NVIS)	30	mA

*Maximum Ratings are those values beyond which damage may occur

¹Per Manufacturer's Specification

PANEL/BACKLIGHT OPTICAL CHARACTERISTICS

Ifwd(Day) = 53.75mA per bank, 4 banks per rail, 2 rails per display, Ifwd(NVIS) = 25mA per bank, 2 banks per rail, 2 rails per display, LED rails: ACR-3169, Ta = +25 Deg-C moving air (36 CFM), LCD displaying full-white image, minimum 2 hour soak.

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Bpd	Panel Luminance (Day)		960	1200		cd/m ²
Bpn	Panel Luminance (NVIS)			9.0		cd/m ²
u'd	White u' coordinate (DAY)			0.200		-
v'd	White v' coordinate (DAY)			0.453		-
Rd	White radius error (DAY)				0.040	-
u'n	White u' coordinate (NVIS)			0.190		-
v'n	White v' coordinate (NVIS)			0.490		-
Rn	White radius error (NVIS)				0.040	-

LED EDGE-LIGHT ELECTRICAL CHARACTERISTICS


Ifwd(Day) = 53.75mA, Ifwd(NVIS) = 25mA, Top = +25Deg-C

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Vfwd	LED rail forward voltage drop (Day mode)		64	71	78	Vdc
Vfwd	LED rail forward voltage drop (NVIS)		81	90	99	Vdc

CIE 1976 UCS CHROMATICITY DIAGRAM

12/14/2021

NVIS WHITE coordinates per MIL-STD-3009: $u'=0.190$, $v'=0.490$, $r=0.04$

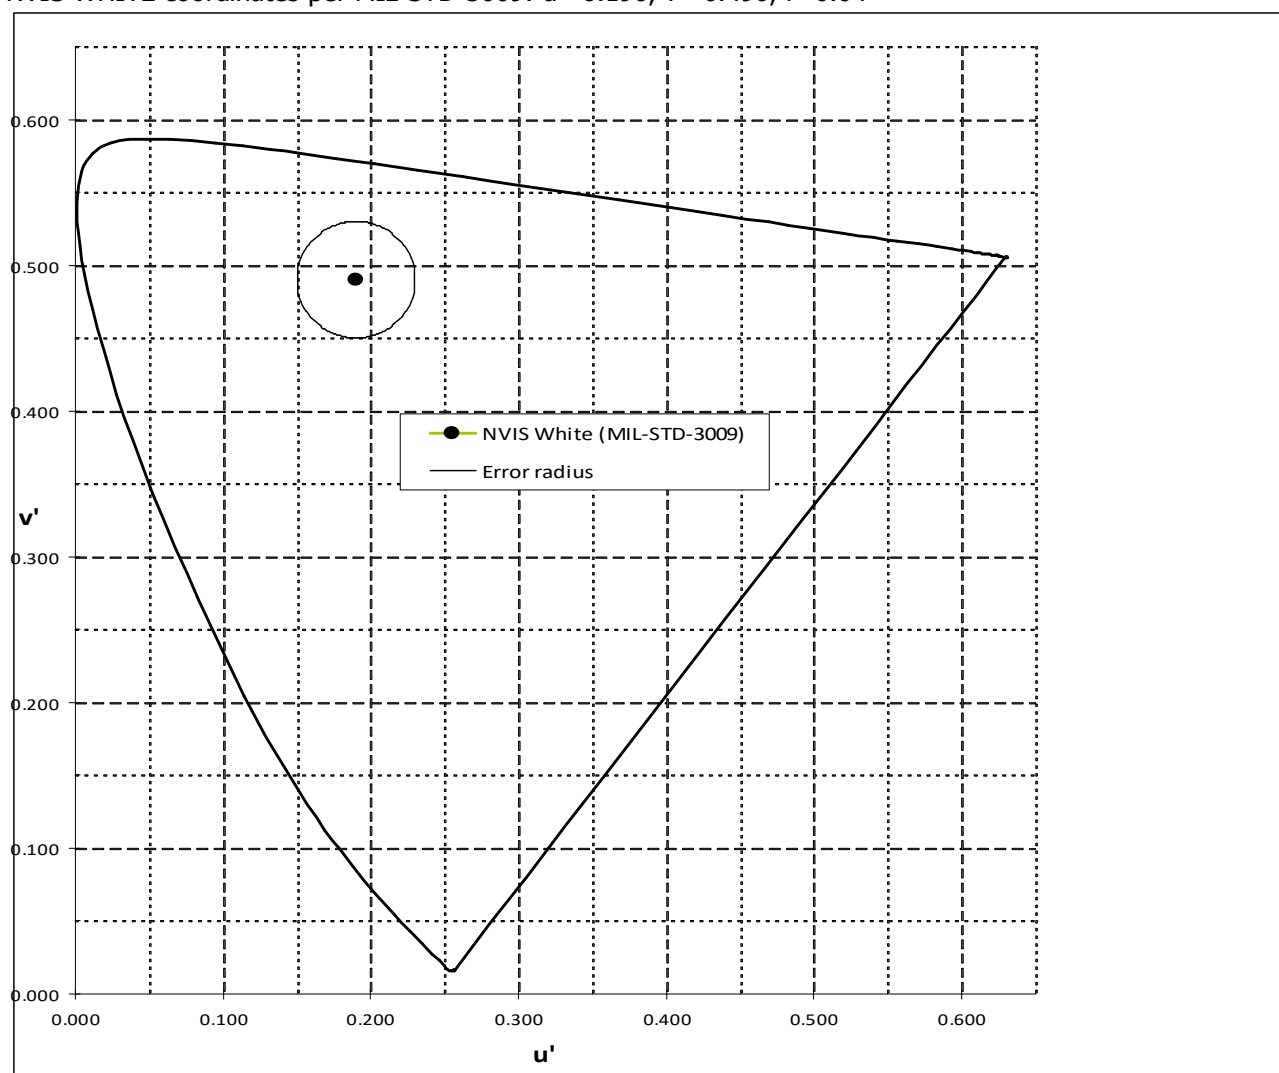


PRODUCT DATA SHEET




TYPICAL LCD/LED BACKLIGHT PERFORMANCE GRAPHS

12/14/2021

Day

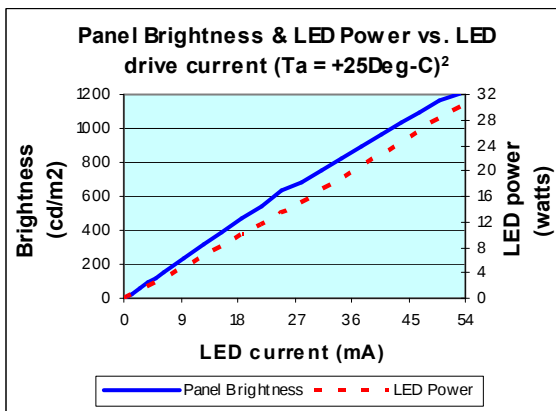

NVIS

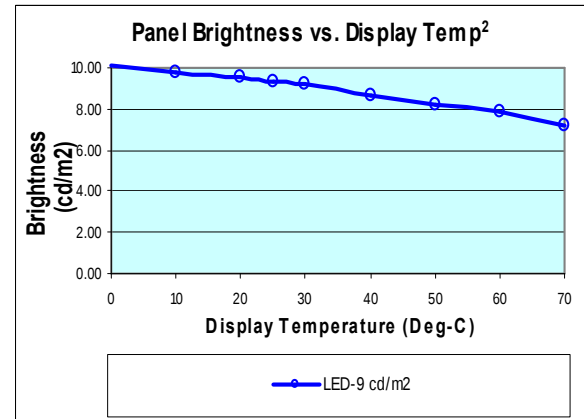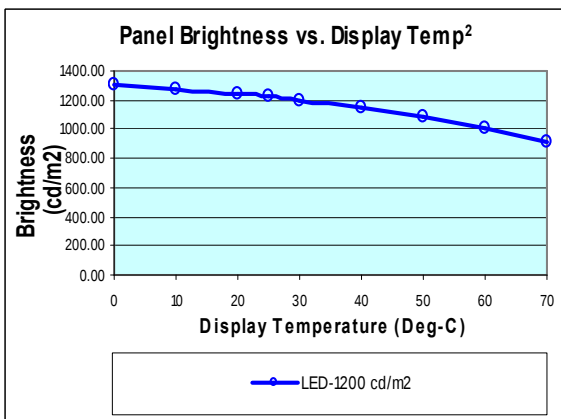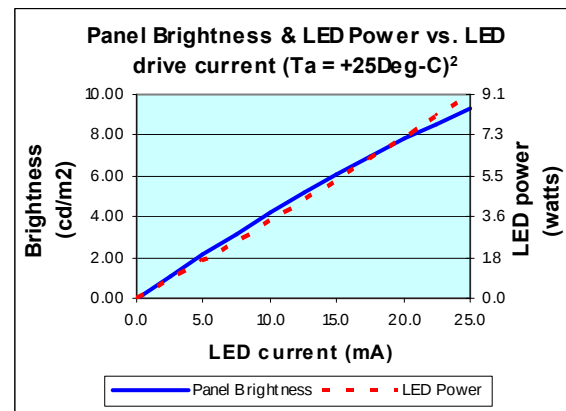


² Moving air (36.0 CFM)

PRODUCT DATA SHEET

MECHANICAL CHARACTERISTICS (FRONT)

12/14/2021

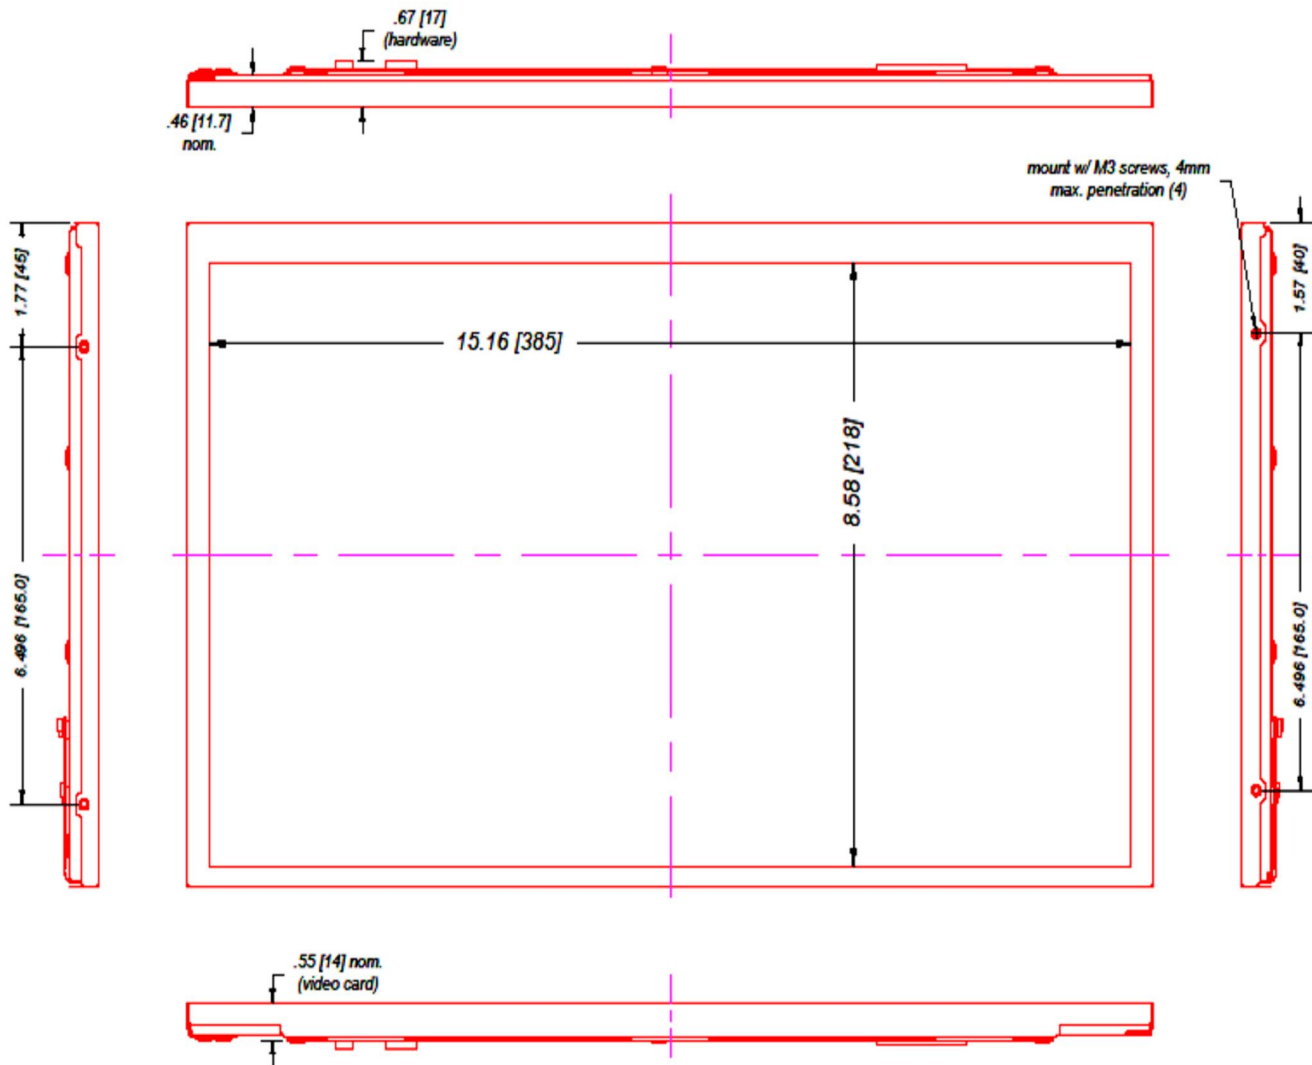

PRODUCT DATA SHEET

MECHANICAL CHARACTERISTICS (BACK)

12/14/2021

