

I-DRIVE 3, 12.0 WATT LED DRIVER

Dual Mode, 120V, (0-100mA Day), 90V, (0-30mA NVIS)

GENERAL DESCRIPTION

The ACI-2384 provides a single board LED Driver solution for the powering of a LED backlight consisting of two types of LEDs, High Bright "Day" LEDs, and IR filtered "NVIS" LEDs.

This driver operates as a Dual Mode constant current LED Driver. In "Day" mode, the driver supplies power out of the Day channel, and in the "NVIS" mode, out of the NVIS channel. Mode selection is accomplished via a signal provided by the user on pin 9 of CON1.

The driver is capable of driving series connected LEDs with a forward drop of up to 120V, and operates over an input voltage range of +9V to +18V.

This driver also features an enable and intensity control input with logarithmic output brightness response, yielding a combined dimming range of greater than 10,000 to 1,

MECHANICAL/ENVIRONMENTAL

Weight = 20.5 grams

Altitude = 35,000 ft max.

Humidity < 95% non-condensing

Size (L x W x H) = 2.35 IN x 1.43 IN x 0.385 IN


PCB thickness = 0.062 IN

Mounting Holes = 0.137 IN diameter (X2)

Input Power & Control Connector = CON1

LED Output Connector = CON2

RoHS Compliant

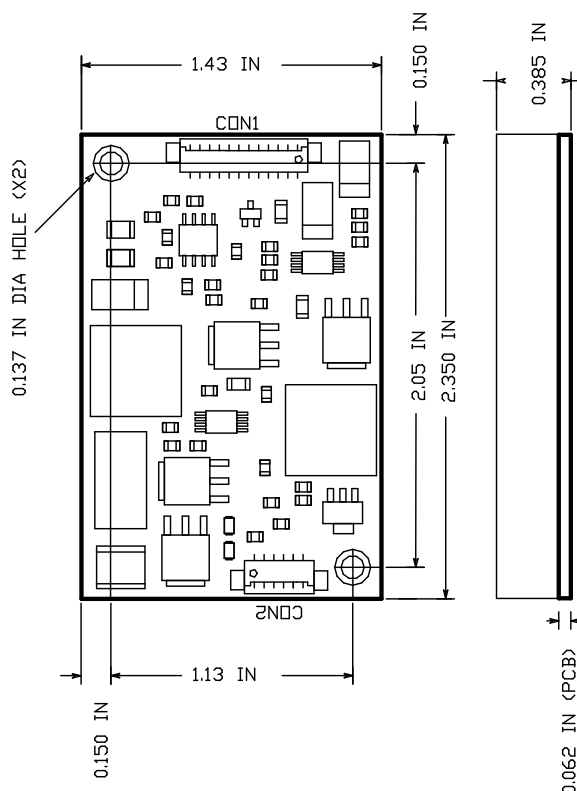

INPUT CONNECTOR

CON1

MOLEX 53261-1271

PIN# FUNCTION

1	+9 TO +18V (PWR)
2	+9 TO +18V (PWR)
3	+9 TO +18V (PWR)
4	GND (PWR)
5	GND (PWR)
6	GND (PWR)
7	ENABLE
8	ICNTL
9	DAY/NVIS MODE SELECT
10	NC
11	GND (SIGNAL)
12	+5V REF OUT

OUTPUT CONNECTOR

CON2

MOLEX 53261-0671

PIN# FUNCTION

1	+LED (ANODE)
2	+LED (ANODE)
3	-LED (NVIS CATHODE)
4	-LED (NVIS CATHODE)
5	-LED (DAY CATHODE)
6	-LED (DAY CATHODE)

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
Vin	Supply Voltage (Referenced to Ground)	-0.7 to 20	Vdc
Vip	Voltage applied to any Input Pin (Referenced to Ground)	-0.7 to 5.7	Vdc
Iop	Current sourced or sinked from any Output Control Pin	+/- 10	mAdc
Pin	Input Power (DC Input Voltage x DC Input Current)	16.0	W
Top	Operating Temperature (Still air ambient around Driver)	-30 to +85	°C
Tstg	Storage Temperature	-40 to +105	°C

*Maximum Ratings are those values beyond which damage to the driver may occur.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
Vin	Supply Voltage (Referenced to Ground)	9.0	18.0	Vdc
Vf	Series Connected Cumulative LED Forward-Drop Voltage (Day or NVIS)	36	120	Vdc
Icntl	LED Intensity Control Voltage	0.1	4.9	Vdc

ELECTRICAL CHARACTERISTICS (Part 1 of 2)

Vin = +12V, Vf=120v, Icntl = +4.9V, Enable = +5V, unless otherwise specified.

Symbol	Parameter	Test Conditions	Min	Nom	Max	Unit
OCV	Open Circuit Voltage	No Load	133	140	147	Vdc
ENoff	Enable Control, Unit Off	Pin 7 <= 0.5V			0.5	Vdc
ENon	Enable Control, Unit ON	Pin 7 >= 2.0V	2.0			Vdc
Ms	Mode Select, Day Mode	Pin 9 >= 2.0V	2.0			Vdc
Ms	Mode Select, NVIS Mode	Pin 9 <= 0.5V			0.5	Vdc
+5Vref	+5V Output Reference Voltage	1K Ohm Load to Ground (Pin 12)	4.75	5.0	5.25	Vdc
Iind	Input Current Draw (Disabled)	Enable (Pin 7) = 0V		0.08		mA
Eff	Electrical Efficiency		87			%
Day Mode, Ms = 5V						
Iout	Output Current		95	100	105	mA
Iadj	Nominal Output Current Adjustment Range	Icntl(Pin 8) = +0.1V to +4.9V	0		100	mA
Iin	Input Current Draw	Vf = 120V		1.15		Adc

Electricals continued on page 3.

ELECTRICAL CHARACTERISTICS (Part 2 of 2)

Vin = +12V, Vf=90v, Icntl = +4.9V, Enable = +5V unless otherwise specified.

Symbol	Parameter	Test Conditions	Min	Nom	Max	Unit
NVIS Mode, Ms = 0V						
Iout	Output Current		28.5	30	31.5	mA
Iadj	Nominal Output Current Adjustment Range	Icntl(Pin 8) = +0.1V to +4.9V	0		30	mA
Iin	Input Current Draw	Vf = 90V		0.26		Adc

