



397 Route 281
Tully, New York 13159
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

ACI-2461

PRODUCT DATA SHEET

03/27/14

I-DRIVE, 17.2 WATT LED DRIVER

(14 Channel 35V, 0-35mA per Channel)

GENERAL DESCRIPTION

The ACI-2461 operates as a true constant current source and is capable of driving up to 14 banks of series connected LEDs with a forward voltage drop up to 35V. This driver provides a complete integrated solution that is regulated over an input voltage range from +10V to +15V DC.

This driver is designed to power the backlight of the NLT **NL160120AC27-32B** 21.3" display with a typical brightness range from 0.2 Nits to 300 Nits.

Simple to connect and operate, this driver solution is capable of providing precise control to support wide dimming applications.

This unit features enable and intensity control inputs.

MECHANICAL/ENVIRONMENTAL

Weight = 59 grams

Altitude = 40,000 ft max.

Humidity < 95% non-condensing

Size (L x W x H) = 6.69 IN x 2.95 IN x 0.365 IN

PCB thickness = 0.047 IN


Mounting Holes = 0.140 IN diameter (X5)

Input Power & Control Connector = CON1

LED Output Connectors = CON2 and CON3

Inductors secured with 3M DP190 Gray Epoxy

RoHS Compliant

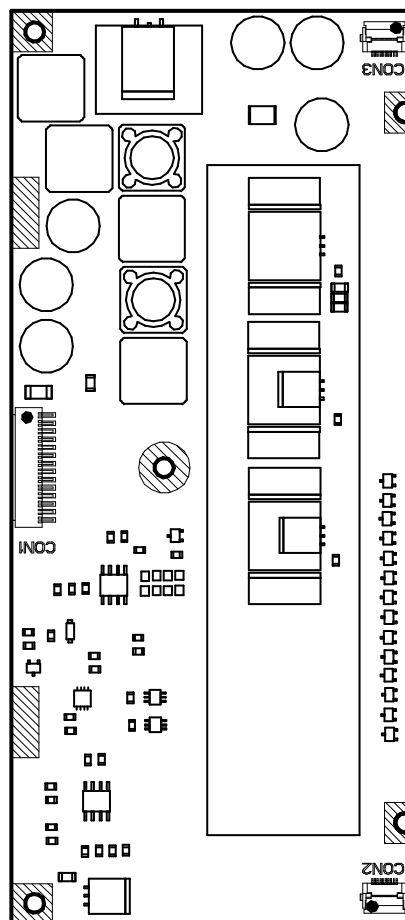

Please refer to Page 3, for input and output connector pin assignments.

Please refer to Page 4, for mechanical dimensions.

PRODUCT DATA SHEET

03/27/14

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
Vin	Supply Voltage (Referenced to Ground)	-0.7 to 18	Vdc
Vip	Voltage applied to any Input Pin (Referenced to Ground)	-0.7 to 5.7	Vdc
Iop	Current sourced or sinked from any Output Control Pin	+/- 10	mAdc
Pin	Input Power (DC Input Voltage x DC Input Current)	22.0	W
Top	Operating Temperature (Still air ambient around Driver)	-30 to +85	°C
Tstg	Storage Temperature	-40 to +105	°C

*Maximum Ratings are those values beyond which damage to the driver may occur.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
Vin	Supply Voltage (Referenced to Ground)	10.0	15.0	Vdc
VinShutDown	Supply Voltage Shutdown (Reference to Ground)	9.3	9.7	Vdc
Vf	Series Connected Cumulative LED Forward-Drop Voltage	**Vin + 1	35	Vdc
Icntl	LED Intensity Control Voltage	0.25	4.75	Vdc
PWMcntl	Intensity Control PWM Duty-Cycle Range (User Supplied Input)	0	100	%
PWMfreq	Intensity Control PWM Frequency Range (User Supplied Input)	100	1000	Hz

**Vin must be less than the minimum Forward-Drop Voltage (Vf).

ELECTRICAL CHARACTERISTICS


Vin = +12V, Vf = 35V per channel, # of channels = 14, Icntl = +4.75V, Enable = +5V, unless otherwise specified.

Symbol	Parameter	Test Conditions	Min	Nom	Max	Unit
OCV	Open Circuit Voltage	No Load	40	45	50	Vdc
Iout	Output Current per Channel		33	35	37	mAdc
Iadj	Nominal Output Current Adjust Range Per Channel	Icntl(Pin 10) <= +0.25V or PWMcntl(Pin 10) = 0%	0			mAdc
		Icntl(Pin 10) >= +4.75V or PWMcntl(Pin 10) = 100%			35	mAdc
PWMhi	PWM High Signal Level (V _{IH})		4.75			Vdc
PWMlo	PWM Low Signal Level (V _{IL})				0.25	Vdc
ENoff	Enable Control, Unit Off				0.5	Vdc
ENon	Enable Control, Unit ON		2.0			Vdc
+5Vref	+5V Output Reference Voltage	1K Ohm Load to Ground (Pin 13)	4.75	5.0	5.25	Vdc
Iin	Input Current Draw			1.6		Adc
Iind	Input Current Draw (Disabled)	Enable (Pin 9) = 0V			0.06	Adc
Eff	Electrical Efficiency			89		%

PRODUCT DATA SHEET


03/27/14

BRIGHTNESS CURVE

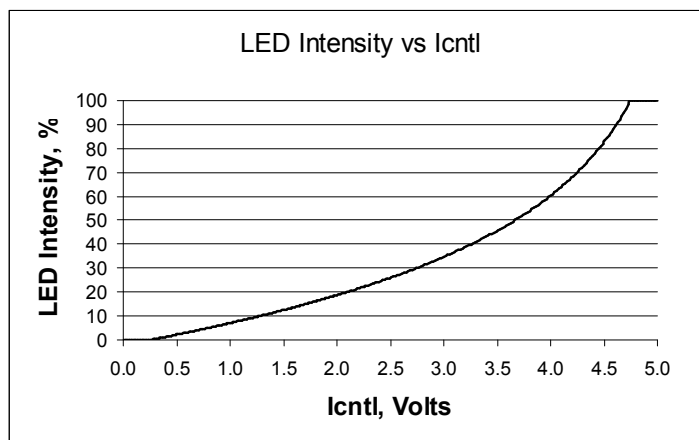

INPUT AND OUTPUT CONNETOR PIN ASSIGNMENTS

INPUT CONNECTOR CON1 MOLEX 87438-1443	OUTPUT CONNECTOR CON2 HIROSE FH12-10S-0.5SH(55) 10 POS, 0.5MM FF, BOTTOM CONTACT	OUTPUT CONNECTOR CON3 HIROSE FH12-10S-0.5SH(55) 10 POS, 0.5MM FF, BOTTOM CONTACT
PIN# FUNCTION	PIN# FUNCTION	PIN# FUNCTION
1 +10 to +15V (PWR)	1 +LED (ANODE)	1 -LED (CATHODE #1)
2 +10 to +15V (PWR)	2 +LED (ANODE)	2 -LED (CATHODE #2)
3 +10 to +15V (PWR)	3 NC	3 -LED (CATHODE #3)
4 +10 to +15V (PWR)	4 -LED (CATHODE #1) (MASTER)	4 -LED (CATHODE #4)
5 GND (PWR)	5 -LED (CATHODE #2)	5 -LED (CATHODE #5)
6 GND (PWR)	6 -LED (CATHODE #3)	6 -LED (CATHODE #6)
7 GND (PWR)	7 -LED (CATHODE #4)	7 -LED (CATHODE #7)
8 GND (PWR)	8 -LED (CATHODE #5)	8 NC
9 ENABLE	9 -LED (CATHODE #6)	9 +LED (ANODE)
10 ICNTL / PWMcntl	10 -LED (CATHODE #7)	10 +LED (ANODE)
11 TBD		
12 TBD		
13 +5VDC REF OUT		
14 GND (SIGNAL OUT)		

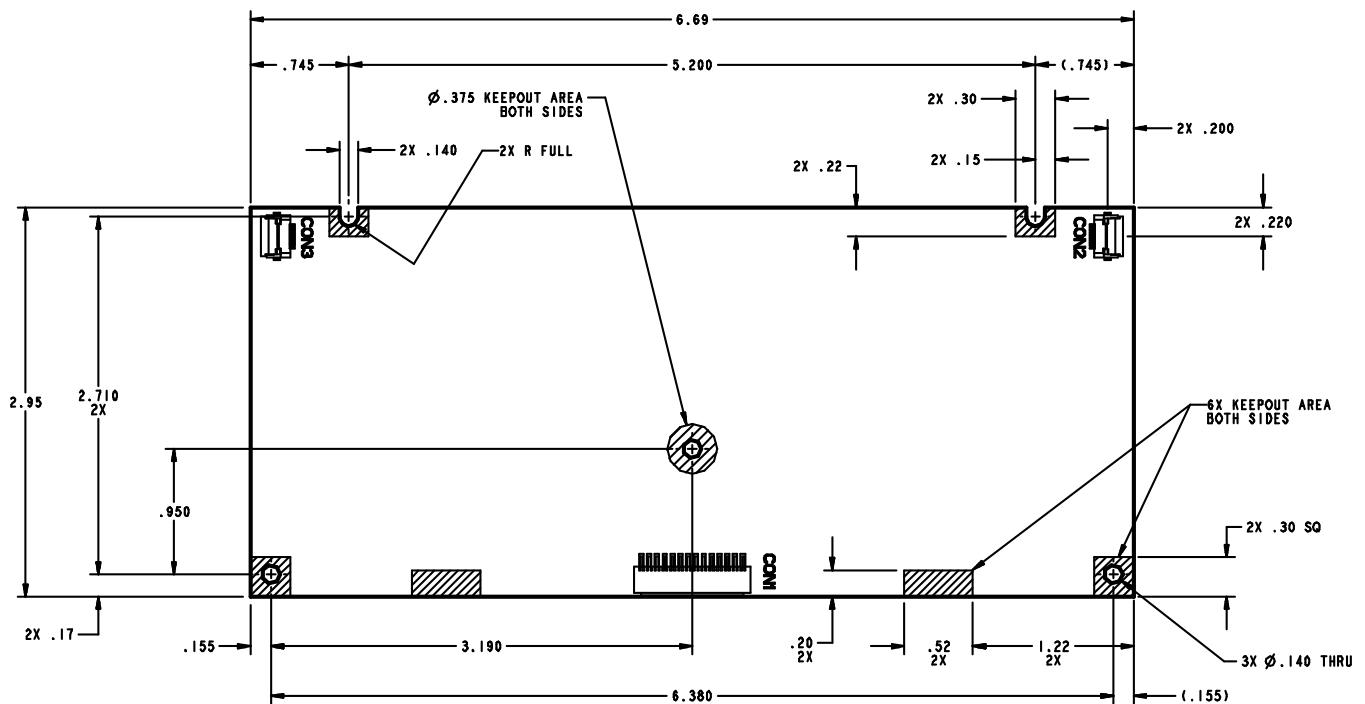

COMPONENT SIDE
MAXIMUM COMPONENT HEIGHT = .318

Mechanical Dimensions
Dimensions are in inches

