

I-DRIVE, 49.5 WATT LED DRIVER

(Single Channel, 90V, 0-550mA)

GENERAL DESCRIPTION

The ACI-2612 operates as a true constant current source and is capable of driving one bank of series connected LEDs with a forward voltage drop up to 90V. This driver provides a complete integrated solution that is regulated over an input voltage range from +20V to +28V DC.

Simple to connect and operate, this driver solution is capable of providing precise control to support dimming applications with a minimum of 3000:1.

This unit features enable and intensity control inputs.

MECHANICAL/ENVIRONMENTAL

Weight = 37.0 grams

Altitude = 35,000 ft max.

Humidity < 95% non-condensing

Size (L x W x H) = 5.50 IN x 1.75 IN x 0.330 IN

PCB thickness = 0.047 IN

PCB Material = FR-4

PCB UL Rating = UL94V-0 (Printed on PCB)


Mounting Holes = 0.128 IN diameter (X4)

Input Power & Control Connector = CON1

LED Output Connector = CON2

Specified Components secured with 3M DP190 Gray Epoxy (X25)

RoHS Compliant

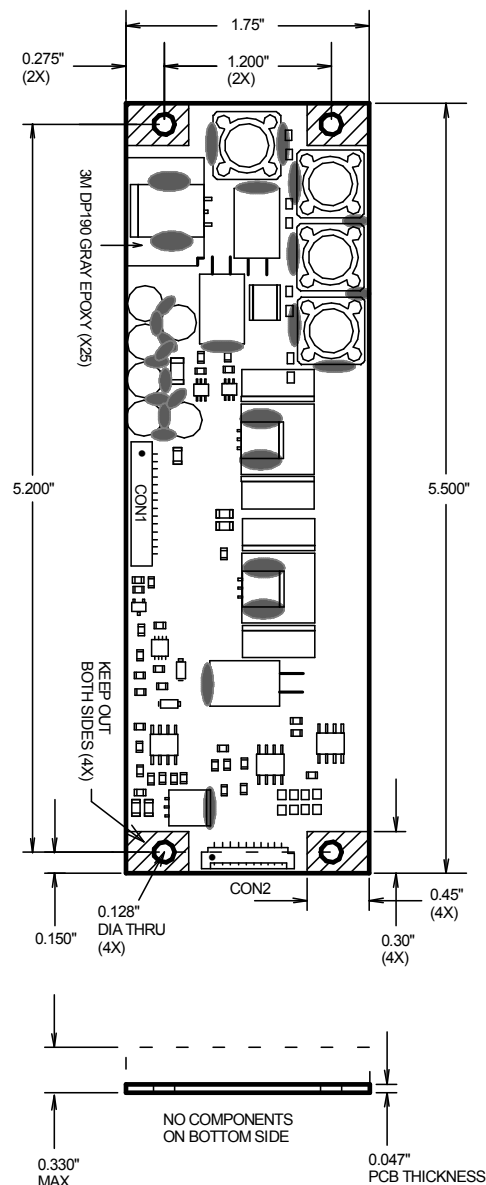

Please refer to Page 3, for input and output connector pin assignments.

PRODUCT DATA SHEET

03/19/15

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
Vin	Supply Voltage (Referenced to Ground)	-0.7 to 30	Vdc
Vip	Voltage applied to any Input Pin (Referenced to Ground)	-0.7 to 5.7	Vdc
Iop	Current sourced or sinked from any Output Control Pin	+/- 10	mAdc
Pin	Input Power (DC Input Voltage x DC Input Current)	61	W
Top	Operating Temperature (Still air ambient around Driver)	-30 to +70	°C
Tstg	Storage Temperature	-40 to +105	°C

*Maximum Ratings are those values beyond which damage to the driver may occur.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
Vin	Supply Voltage (Referenced to Ground)	20.0	28.0	Vdc
Vf	Series Connected Cumulative LED Forward-Drop Voltage	**Vin + 1	90	Vdc
Icctl	LED Intensity Control Voltage	0.25	4.75	Vdc

**Vin must be less than the minimum Forward-Drop Voltage (Vf).

ELECTRICAL CHARACTERISTICS


Vin = +24.0V, Vf = 90V, Icctl = +4.75V, Enable = +5V, unless otherwise specified.

Symbol	Parameter	Test Conditions	Min	Nom	Max	Unit
OCV	Open Circuit Voltage	No Load	105	110	115	Vdc
Iout	Output Current		522	550	578	mAdc
Iadj	Nominal Output Current Adjust Range	Icctl(Pin 10) <= 0.25V	0			mAdc
		Icctl(Pin 10) >= 4.75V			550	mAdc
ENoff	Enable Control, Unit Off				0.5	Vdc
ENon	Enable Control, Unit ON		2.0			Vdc
+5Vref	+5V Output Reference Voltage	1K Ohm Load to Ground (Pin 13)	4.75	5.0	5.25	Vdc
Iin	Input Current Draw			2.2		Adc
Iind	Input Current Draw (Disabled)	Enable (Pin 9) = 0V			0.06	Adc
Eff	Electrical Efficiency			90		%

PRODUCT DATA SHEET

03/19/15

BRIGHTNESS CURVE

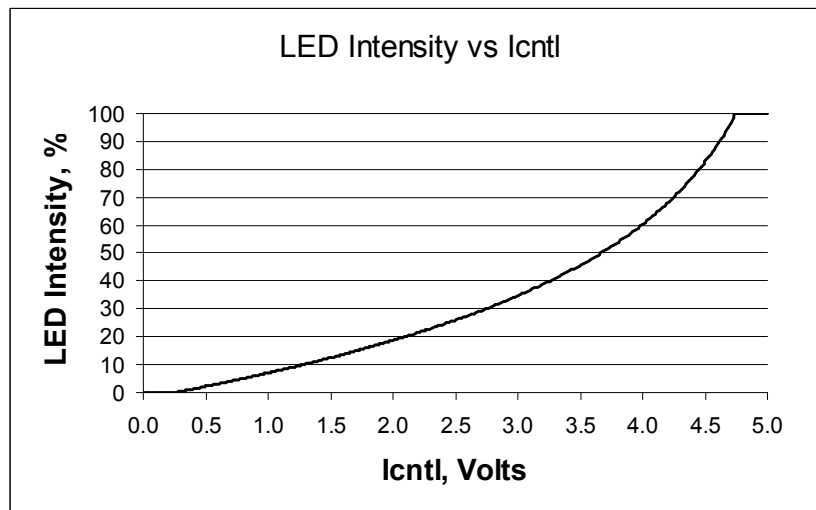

INPUT AND OUTPUT CONNETOR PIN ASSIGNMENTS

INPUT CONNECTOR CON1 MOLEX 87438-1443		OUTPUT CONNECTOR CON2 MOLEX 53261-1071	
PIN#	FUNCTION	PIN#	FUNCTION
1	+20.0 to +28.0V (PWR)	1	+LED (ANODE)
2	+20.0 to +28.0V (PWR)	2	+LED (ANODE)
3	+20.0 to +28.0V (PWR)	3	+LED (ANODE)
4	+20.0 to +28.0V (PWR)	4	+LED (ANODE)
5	GND (PWR)	5	NC
6	GND (PWR)	6	-LED (CATHODE)
7	GND (PWR)	7	-LED (CATHODE)
8	GND (PWR)	8	-LED (CATHODE)
9	ENABLE	9	-LED (CATHODE)
10	ICNTL	10	-LED (CATHODE)
11	TBD		
12	TBD		
13	+5VDC REF OUT		
14	GND (SIGNAL GND)		