



397 Route 281
Tully, New York 13159
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

I-DRIVE, 14.4 WATT LED DRIVER

(Two Channel 80V, 0-90mA per Channel)

GENERAL DESCRIPTION

The ACI-2750 operates as a true constant current source and is capable of driving up to 2 banks of series connected LEDs with a forward voltage drop up to 80V. This driver provides a complete integrated solution that is regulated over an input voltage range from +10 to +15VDC.

Simple to connect and operate, this driver solution is capable of providing precise control to support wide dimming applications.

This unit features enable and intensity control inputs.

MECHANICAL/ENVIRONMENTAL

Weight = 10 grams

Altitude = 35,000 ft max.

Humidity < 95% non-condensing

Size (L x W x H) = 2.27 IN x 1.43 IN x 0.240 IN

PCB thickness = 0.047 IN

Mounting Holes = 0.126IN diameter (X2)

Input Power & Control Connector = CON1


LED Output Connector = CON2

RoHS Compliant

ACI-2750

PRODUCT DATA SHEET

06/30/16

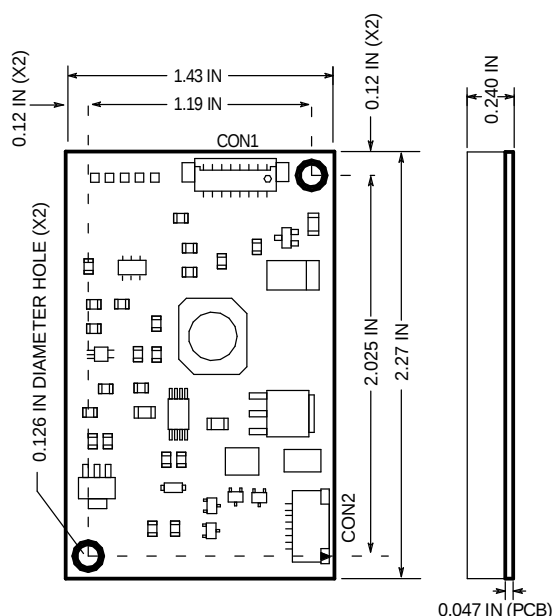

INPUT CONNECTOR
CON1
MOLEX 53261-0871

PIN#	FUNCTION
1	+10 to +15V
2	+10 to +15V
3	GND (PWR)
4	GND (PWR)
5	ENABLE
6	ICNTL
7	+5V REF OUT
8	GND (SIGNAL)

OUTPUT CONNECTOR
CON2
MOLEX 52745-0897

PIN#	FUNCTION
1	NOT USED
2	NOT USED
3	- LED (CATHODE2)
4	- LED (CATHODE1) Master*
5	+ LED (ANODE)
6	+ LED (ANODE)
7	+ LED (ANODE)
8	+ LED (ANODE)

*The Master Channel must always be used

CON2 IS A FLEX FOIL CONNECTOR WITH 0.5MM PITCH AND MAKES TOP CONTACT WITH FLEX FOIL LED RAIL

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
Vin	Supply Voltage (Referenced to Ground)	-0.7 to 18	Vdc
Vip	Voltage applied to any Input Pin (Referenced to Ground)	-0.7 to 5.7	Vdc
Iop	Current sourced or sinked from any Output Control Pin	+/- 10	mAdc
Pin	Input Power (DC Input Voltage x DC Input Current)	18.6	W
Top	Operating Temperature (Still air ambient around Driver)	-30 to +85	°C
Tstg	Storage Temperature	-40 to +105	°C

*Maximum Ratings are those values beyond which damage to the driver may occur.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
Vin	Supply Voltage (Referenced to Ground)	10.0	15.0	Vdc
Vf	Series Connected Cumulative LED Forward-Drop Voltage	**Vin + 1	80	Vdc
Icntl	LED Intensity Control Voltage	0.25	4.75	Vdc

**Vin must be less than the minimum Forward-Drop Voltage (Vf).

ELECTRICAL CHARACTERISTICS

Vin = +12V, Vf = 80V per channel, # of channels = 2, Icntl = +4.75V, Enable = +5V, unless otherwise specified.

Symbol	Parameter	Test Conditions	Min	Nom	Max	Unit
OCV	Open Circuit Voltage	No Load	85	95	105	Vdc
Iout	Output Current per Channel		85	90	95	mAdc
Iadj	Nominal Output Current Adjust Range Per Channel	Icntl(Pin 6) ≤ +0.25V or PWMcntl(Pin 6) = 0%	0			mAdc
		Icntl(Pin 6) ≥ +4.75V or PWMcntl(Pin 6) = 100%			90	mAdc
ENoff	Enable Control, Unit Off				0.5	Vdc
ENon	Enable Control, Unit ON		2.0			Vdc
+5Vref	+5V Output Reference Voltage	1K Ohm Load to Ground (Pin 7)	4.75	5.0	5.25	Vdc
Iin	Input Current Draw			1.3		Adc
Iind	Input Current Draw (Disabled)	Enable (Pin 5) = 0V			0.06	Adc
Eff	Electrical Efficiency			90		%

BRIGHTNESS CURVE

