



397 Route 281
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

I-DRIVE 3, 14.5 WATT LED DRIVER

(Single Channel 85V, 0-170mA)

GENERAL DESCRIPTION

The ACI-2953 represents the 3rd generation of I-Drive technology used for powering LED backlights.

Operating as a true constant current source capable of driving series connected LEDs with a forward drop of up to 85V, and operates over an input voltage range of +9V to +18V.

Simple to connect and operate, this driver solution is capable of providing precise control to support dimming applications with a minimum of 3000:1.

This driver also features an enable and intensity control input with logarithmic output brightness response.

MECHANICAL/ENVIRONMENTAL

Weight = 20.5 grams

Altitude = 35,000 ft max.

Humidity < 95% non-condensing

Size (L x W x H) = 2.35 IN x 1.43 IN x 0.385 IN

PCB thickness = 0.062 IN

Mounting Holes = 0.128 IN diameter (X2)

Input Power & Control Connector = CON1


LED Output Connector = CON2

RoHS Compliant

ACI-2953

PRODUCT DATA SHEET

02/27/19

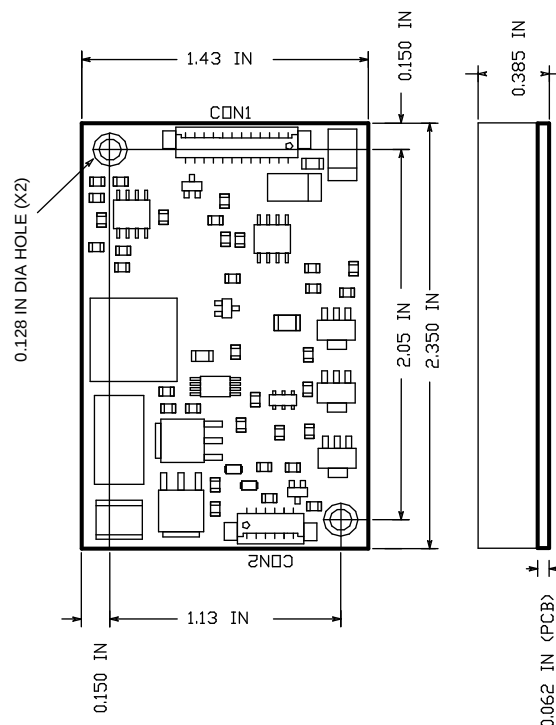

INPUT CONNECTOR
CON1
MOLEX 53261-1271

OUTPUT CONNECTOR
CON2
MOLEX 53261-0671

PIN#	FUNCTION
1	+9 TO +18V (PWR)
2	+9 TO +18V (PWR)
3	+9 TO +18V (PWR)
4	GND (PWR)
5	GND (PWR)
6	GND (PWR)
7	ENABLE
8	ICNTL / PWMNTL
9	NC
10	NC
11	GND (SIGNAL)
12	+5V REF OUT

PIN#	FUNCTION
1	+LED (ANODE)
2	+LED (ANODE)
3	NC
4	NC
5	-LED (CATHODE)
6	-LED (CATHODE)

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
Vin	Supply Voltage (Referenced to Ground)	-0.7 to 20	Vdc
Vip	Voltage applied to any Input Pin (Referenced to Ground)	-0.7 to 5.7	Vdc
Iop	Current sourced or sinked from any Output Control Pin	+/- 10	mAdc
Pin	Input Power (DC Input Voltage x DC Input Current)	19.2	W
Top	Operating Temperature (Still air ambient around Driver)	-30 to +85	°C
Tstg	Storage Temperature	-40 to +105	°C

*Maximum Ratings are those values beyond which damage to the driver may occur

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
Vin	Supply Voltage (Referenced to Ground)	9.0	18.0	Vdc
Vf	Series Connected Cumulative LED Forward-Drop Voltage	**Vin + 1	85	Vdc
Icntl	LED Intensity Control Voltage	0.1	3.3	Vdc
PWMcntl	Intensity Control PWM Duty-Cycle Range (User Supplied Input)	0	100	%
PWMfreq	Intensity Control PWM Frequency Range (User Supplied Input)	100	1000	Hz

**Vin must be less than the minimum Forward-Drop Voltage (Vf).

ELECTRICAL CHARACTERISTICS

Vin = +12V, Vf = 85Vdc, Icntl = +3.3V, Enable = +5V unless otherwise specified

Symbol	Parameter	Test Conditions	Min	Nom	Max	Unit
OCV	Open Circuit Voltage	No Load	133	140	147	Vdc
Iout	Output Current		161	170	179	mAdc
Iadj	Nominal Output Current Adjust Range	Icntl(Pin 8) <= +0.1V or PWMcntl(Pin 8) = 0%	0			mAdc
		Icntl(Pin 8) >= +3.3V or PWMcntl(Pin 8) = 100%			170	mAdc
PWMhi	PWM High Signal Level (V _{IH})		3.3			Vdc
PWMlo	PWM Low Signal Level (V _{IL})				0.1	Vdc
ENoff	Enable Control, Unit Off				0.5	Vdc
ENon	Enable Control, Unit On		2.0			Vdc
+5Vref	+5V Output Reference Voltage	1K Ohm Load to Ground (Pin 12)	4.75	5.0	5.25	Vdc
Iin	Input Current Draw			1.4		Adc
Iind	Input Current Draw (Disabled)	Enable (Pin 7) = 0V			0.06	Adc
Eff	Efficiency		87			%

