



397 Route 281 – P.O. Box 1175
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

ACI-3170

PRODUCT DATA SHEET

06/03/22

I-DRIVE 5, 21.6 WATT LED DRIVER (60V, 4 Channels, 0-90mA per Channel)

GENERAL DESCRIPTION

The ACI-3170 represents the 5th generation of I-Drive technology used for powering LED backlights.

Operating as a true constant current source and capable of driving up to 4 parallel banks of series connected LED's with a forward voltage drop up to 60V. This driver provides a complete integrated solution that is regulated over an input range of +10V to +18V.

Simple to connect and operate, this driver solution is capable of providing precise control to support wide dimming applications.

This unit features enable and intensity control inputs with intensity control being adjusted to go full on with a PWM of 100%.

MECHANICAL/ENVIRONMENTAL

Weight = 35.7 grams

Altitude = 35,000 ft max.

Humidity < 95% non-condensing

Size (L x W x H) = 3.25 IN x 2.00 IN x 0.47 IN


PCB thickness = 0.062 IN

Mounting Holes = 0.128 IN diameter (X2)

Input Power & Control Connector = CON1

LED Output Connector = CON2

RoHS Compliant

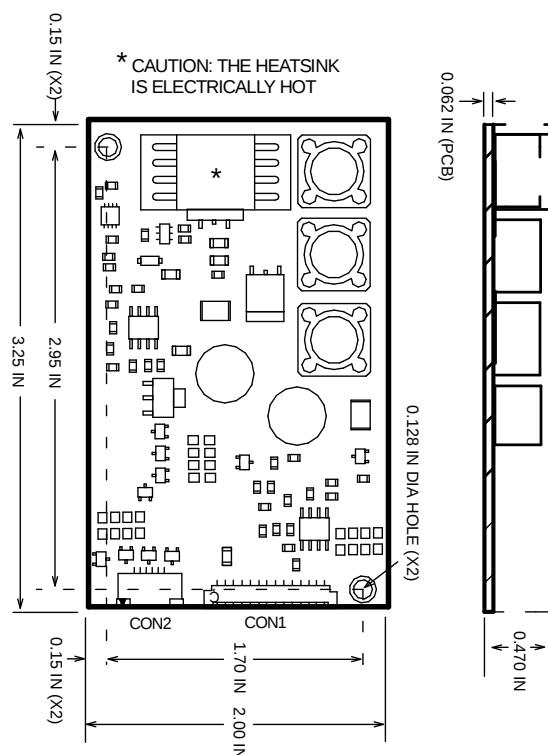

INPUT CONNECTOR
CON1
MOLEX 53261-1471

PIN#	FUNCTION
1	+10 to +18V (PWR)
2	+10 to +18V (PWR)
3	+10 to +18V (PWR)
4	+10 to +18V (PWR)
5	GND (PWR)
6	GND (PWR)
7	GND (PWR)
8	GND (PWR)
9	ENABLE
10	ICNTL / PWM
11	TBD
12	TBD
13	+5VDC REF OUT
14	GND (SIGNAL)

OUTPUT CONNECTOR
CON2
MOLEX 52207-0685

PIN#	FUNCTION
1	- LED (CATHODE1) Master*
2	- LED (CATHODE2)
3	+ LED (ANODE)
4	+ LED (ANODE)
5	- LED (CATHODE3)
6	- LED (CATHODE4)

*The Master Channel must always be used

CON2 IS A FLEX FOIL CONNECTOR WITH 1MM PITCH AND MAKES TOP CONTACT WITH FLEX FOIL CABLE

FLEX FOIL OUTPUT CABLE P/N: 27-R0110
6 POS, 1MM PITCH, 10 INCH LENGTH

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
Vin	Supply Voltage (Referenced to Ground)	-0.7 to 20	Vdc
Vip	Voltage applied to any Input Pin (Referenced to Ground)	-0.7 to 5.7	Vdc
Iop	Current sourced or sinked from any Output Control Pin	+/- 10	mAdc
Pin	Input Power (DC Input Voltage x DC Input Current)	28.7	W
Top	Operating Temperature (Still air ambient around Driver)	-30 to +85	°C
Tstg	Storage Temperature	-40 to +105	°C

*Maximum Ratings are those values beyond which damage to the driver may occur.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
Vin	Supply Voltage (Referenced to Ground)	10.0	18.0	Vdc
Vf	Series Connected Cumulative LED Forward-Drop Voltage	**Vin + 1	60	Vdc
Icntl	LED Intensity Control Voltage	0.1	3.3	Vdc
PWMcntl	Intensity Control PWM Frequency Range (User Supplied Input)	100	1000	Hz

**Vin must be less than the minimum Forward-Drop Voltage (Vf).

ELECTRICAL CHARACTERISTICS

Vin = +12V, Vf = 60V per channel, # of channels = 4, Icntl = +3.3V, Enable = +5V unless otherwise specified.

Symbol	Parameter	Test Conditions	Min	Nom	Max	Unit
OCV	Open Circuit Voltage	No Load	63	70	77	Vdc
Iout	Output Current per Channel		85	90	95	mAdc
Iadj	Nominal Output Current Adjust Range	Icntl(Pin 10) <= +0.1V or PWMcntl(Pin 10) = 0%	0			mAdc
		Icntl(Pin 10) >= +3.3V or PWMcntl(Pin 10) = 100%			90	mAdc
PWMhi	PWM High Signal Level (V _{IH})		3.3			Vdc
PWMlo	PWM Low Signal Level (V _{IL})				0.1	Vdc
ENoff	Enable Control, Unit Off				0.5	Vdc
ENon	Enable Control, Unit ON		2.0			Vdc
+5Vref	+5V Output Reference Voltage	1K Ohm Load to Ground (Pin 13)	4.75	5.0	5.25	Vdc
Iin	Input Current Draw			2.1		Adc
Iind	Input Current Draw (Disabled)	Enable (Pin 9) = 0V			0.06	Adc
Eff	Electrical Efficiency			87		%

CAUTION: For proper LED Current, all four channels must be connected.

BRIGHTNESS CURVE

