

### I-DRIVE 3, 14.5 WATT LED DRIVER (Single Channel 75V, 0-190mA)


#### GENERAL DESCRIPTION

The ACI-C075190-2970 represents the 3<sup>rd</sup> generation of I-Drive technology used for powering LED backlights.

Operating as a true constant current source capable of driving series connected LEDs with a forward drop of up to 95V, and operates over an input voltage range of +9V to +18V.

Simple to connect and operate, this driver solution is capable of providing precise control to support dimming applications with a minimum of 3000:1.

This driver also features an enable and intensity control input with logarithmic output brightness response, yielding a nominal dimming range of greater than 2000 to 1.

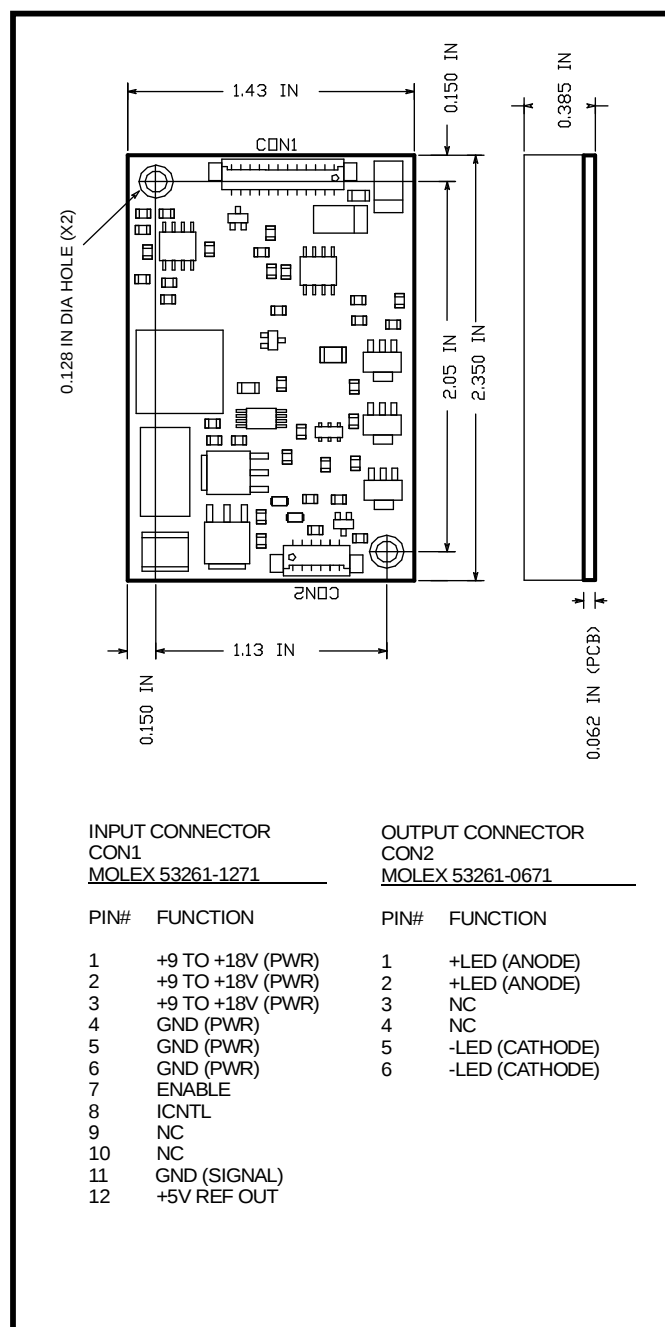

#### MECHANICAL/ENVIRONMENTAL

Weight = 20.5 grams

Altitude = 35,000 ft max.

Humidity < 95% non-condensing

Size (L x W x H) = 2.35 IN x 1.43 IN x 0.385 IN

PCB thickness = 0.062 IN

Mounting Holes = 0.128 IN diameter (X2)

Input Power & Control Connector = CON1

LED Output Connector = CON2

RoHS Compliant

## PRODUCT DATA SHEET

12/19/18

### MAXIMUM RATINGS\*

| Symbol | Parameter                                               | Value       | Unit |
|--------|---------------------------------------------------------|-------------|------|
| Vin    | Supply Voltage (Referenced to Ground)                   | -0.7 to 20  | Vdc  |
| Vip    | Voltage applied to any Input Pin (Referenced to Ground) | -0.7 to 5.7 | Vdc  |
| Iop    | Current sourced or sinked from any Output Control Pin   | +/- 10      | mAdc |
| Pin    | Input Power (DC Input Voltage x DC Input Current)       | 19.1        | W    |
| Top    | Operating Temperature (Still air ambient around Driver) | -30 to +70  | °C   |
| Tstg   | Storage Temperature                                     | -40 to +105 | °C   |

\*Maximum Ratings are those values beyond which damage to the driver may occur

### RECOMMENDED OPERATING CONDITIONS

| Symbol | Parameter                                            | Min | Max  | Unit |
|--------|------------------------------------------------------|-----|------|------|
| Vin    | Supply Voltage (Referenced to Ground)                | 9.0 | 18.0 | Vdc  |
| Vf     | Series Connected Cumulative LED Forward-Drop Voltage | 36  | 75   | Vdc  |
| Icntl  | LED Intensity Control Voltage                        | 0.1 | 4.6  | Vdc  |

### ELECTRICAL CHARACTERISTICS

Vin = +12V, Vf = 75Vdc, Icntl = +4.6V, Enable = +5V unless otherwise specified

| Symbol | Parameter                           | Test Conditions                | Min  | Nom | Max  | Unit |
|--------|-------------------------------------|--------------------------------|------|-----|------|------|
| OCV    | Open Circuit Voltage                | No Load                        | 133  | 140 | 147  | Vdc  |
| Iout   | Output Current                      |                                | 180  | 190 | 200  | mAdc |
| Iadj   | Nominal Output Current Adjust Range | Icntl(Pin 8)= +0.1V to +4.6V   | 0    |     | 190  | mAdc |
| ENoff  | Enable Control, Unit Off            |                                |      |     | 0.5  | Vdc  |
| ENon   | Enable Control, Unit ON             |                                | 2.0  |     |      | Vdc  |
| +5Vref | +5V Output Reference Voltage        | 1K Ohm Load to Ground (Pin 12) | 4.75 | 5.0 | 5.25 | Vdc  |
| Iin    | Input Current Draw                  |                                |      | 1.4 |      | Adc  |
| Iind   | Input Current Draw (Disabled)       | Enable (Pin 7) = 0V            |      |     | 0.06 | Adc  |
| Eff    | Electrical Efficiency               |                                | 87   |     |      | %    |

### LED Intensity vs $I_{cntl}$

