



397 Route 281 - P. O. Box 1175
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696-9923

e-mail: sales@acipower.com
www.acipower.com

ACI-120125-1708

PRELIMINARY DATA SHEET

I-DRIVE, 15 WATT LED DRIVER

(Single channel 120V, 0-125mA)

7/24/07

GENERAL DESCRIPTION

The ACI-120125-1708 represents the 3rd generation of I-Drive technology used for powering LED backlights.

Operating as a true constant current source and capable of driving up to 40 LED's in series. The driver provides a complete integrated solution that is regulated over an input voltage range of +8V to +18V.

Simple to connect and operate, the driver solution is capable of providing precise control to support dimming applications with a minimum of 3000:1.

This unit feature's enable and intensity control inputs.

MECHANICAL / ENVIRONMENTAL

Weight = TBD grams

Altitude = 35,000 Ft maximum

Humidity < 95% non-condensing


Size (L x W x H) = 2.350 IN x 1.425 IN x 0.39 IN

PCB thickness = 0.062 IN

Mounting holes = 0.128 IN diameter (X2)

Input power & control connector = CON1

LED output connector(s) = CON2

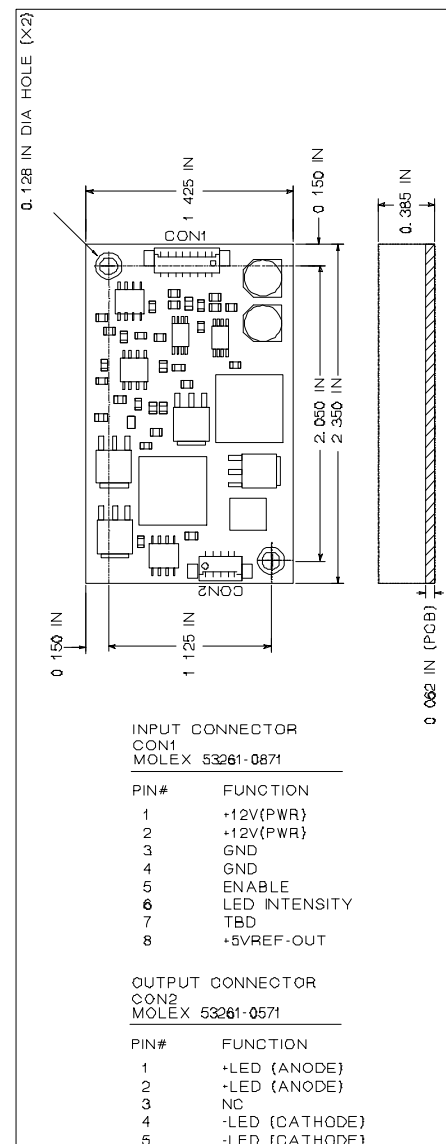



397 Route 281 - P. O. Box 1175
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696-9923

e-mail: sales@acipower.com
www.acipower.com

ACI-120125-1708

PRELIMINARY DATA SHEET

7/24/07

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
Vin	Supply Voltage (Referenced to Ground)	-0.7 to 20	Vdc
Vip	Voltage applied to any input pin (Referenced to ground)	-0.7 to 5.7	Vdc
Iop	Current sourced or sinked from any output control pin	+/- 10	madc
Pin	Input power (DC input voltage x DC input current)	20	Watts
Top	Operating temperature (Still air ambient around inverter)	-20 to +85	Deg-C
Tstg	Storage Temperature	-40 to +105	Deg-C

* Maximum ratings are those values beyond which damage to the LED driver may occur

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
Vin	Supply Voltage (Referenced to Ground)	8.0	18.0	Vdc
Vf	Series connected cumulative LED forward-drop voltage	36	120	Vdc
Icctl	LED intensity control voltage	0.5	4.5	Vdc

ELECTRICAL CHARACTERISTICS

Vin = +12V, Vf = 120Vdc, Icctl = +4.5V, Enable = +5V unless otherwise specified

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
OCV	Open circuit voltage	No load	123	130	137	Vdc
Iout	Output current		119	125	131	madc
Iadj	Nominal output current adjust range	Icctl (Pin 6) = +0.5V to +4.5V	0		125	madc
ENoff	Enable control, unit OFF				0.5	Vdc
ENon	Enable control, unit ON		2.0			Vdc
+5Vref	+5 volt output reference voltage	1k load to ground (Pin 8)	4.75	5.0	5.25	Vdc
Iin	Input current draw			1.5		Adc
Iind	Input current draw (Disabled)	Enable (Pin 5) = 0V			0.06	Adc
Eff	Electrical Efficiency		86			%