



397 Route 281
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

ACR-0672-2971

PRODUCT DATA SHEET

10.635" DUAL MODE LED RAIL

(Day LEDs: Dual Bank, 67V @ 78.75mA)

12/27/2018

GENERAL DESCRIPTION

The ACR-0672-2971 is designed as a replacement for edge lit 12.1" LED displays.

The rail uses high performance LEDs

The rail requires the use of a constant current source to properly drive the LED's.

The LED rail is compatible with any of ACI's I-Drive series of LED Drivers.

MECHANICAL / ENVIRONMENTAL

Weight = 8 grams

Altitude = 35,000 Ft maximum


Humidity < 95% non-condensing

Size (L x W x H) = 10.635 IN x 0.140 IN x .035 IN

Flex Foil Thickness = 0.007 IN

Input connector = CON1

RoHS compliant

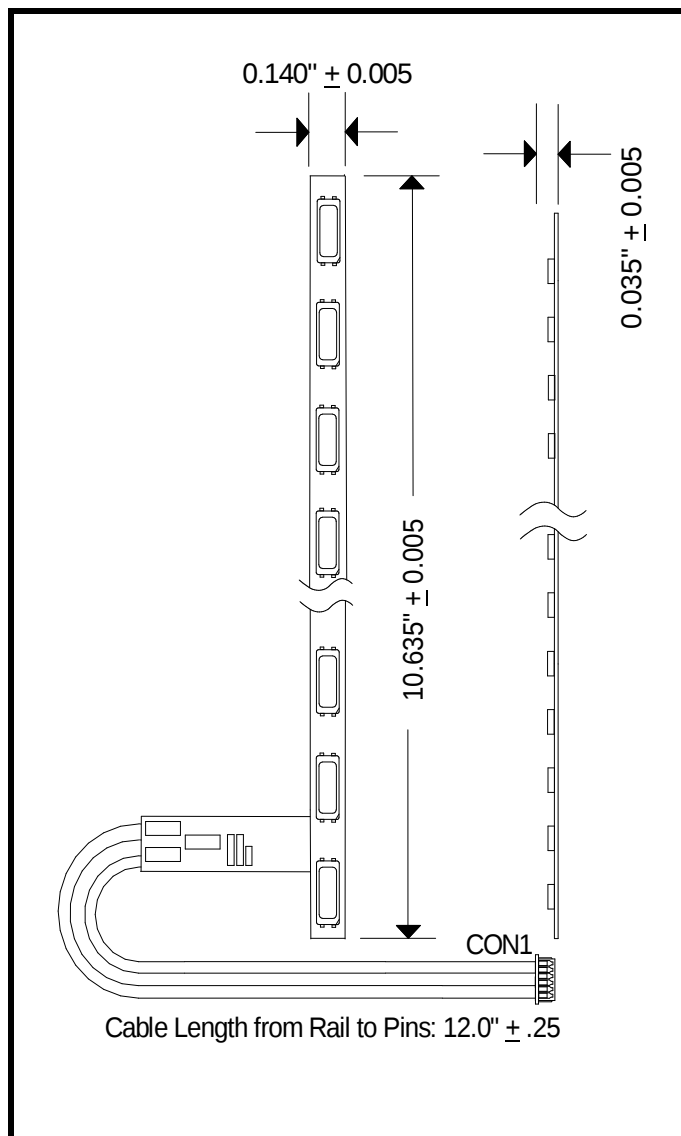

397 Route 281
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

PRODUCT DATA SHEET

DAY MODE

MAXIMUM RATINGS

12/27/2018

Symbol	Parameter	Value	Unit
Tled	Operating temperature of LED edge light (light rail contact)	-30 to +85	Deg-C
Tstg	LED Rail storage temperature	-40 to +100	Deg-C
Ifwd	Maximum LED forward current (DC)	95	mA

LED OPTICAL CHARACTERISTICS

LED Manufacturer specifications for reference purpose only

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
BL	LED Brightness	Ifwd = 150mA	87	93		lm
X	White X coordinate			0.260		
Y	White Y coordinate			0.270		

LED RAIL ELECTRICAL CHARACTERISTICS

Ifwd = 78.75mA (2 banks per rail), Tled = +75Deg-C (LED's heat sinking to the display)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Vfwd	LED rail forward voltage drop		60	67	74	Vdc

TYPICAL LED RAIL PERFORMANCE GRAPHS

