



397 Route 281
Tully, New York 13159-1175
Phone: 315 696-6676
Email: sales@acipower.com
www.acipower.com

ACR-0706-3142

PRODUCT DATASHEET

21.0" LED RAIL

(Six Banks, 70.5V @ 83.3mA)

4/25/2022

GENERAL DESCRIPTION

The ACR-0706-3142 is designed as a replacement for dual rail, dual edge lit 23.8" / 24" LED displays.

The rail uses high performance LEDs

The rail requires the use of a constant current source to properly drive the LED's.

The LED rail is compatible with any of ACI's I-Drive series of LED Drivers.

MECHANICAL / ENVIRONMENTAL

Weight = 6 grams

Altitude = 35,000 Ft maximum


Humidity < 95% non-condensing

Size (L x W x H) = 21.000 IN x 0.175 IN x 0.035 IN

Flex PCB thickness = 0.007 IN

Input connector = CON1

RoHS compliant

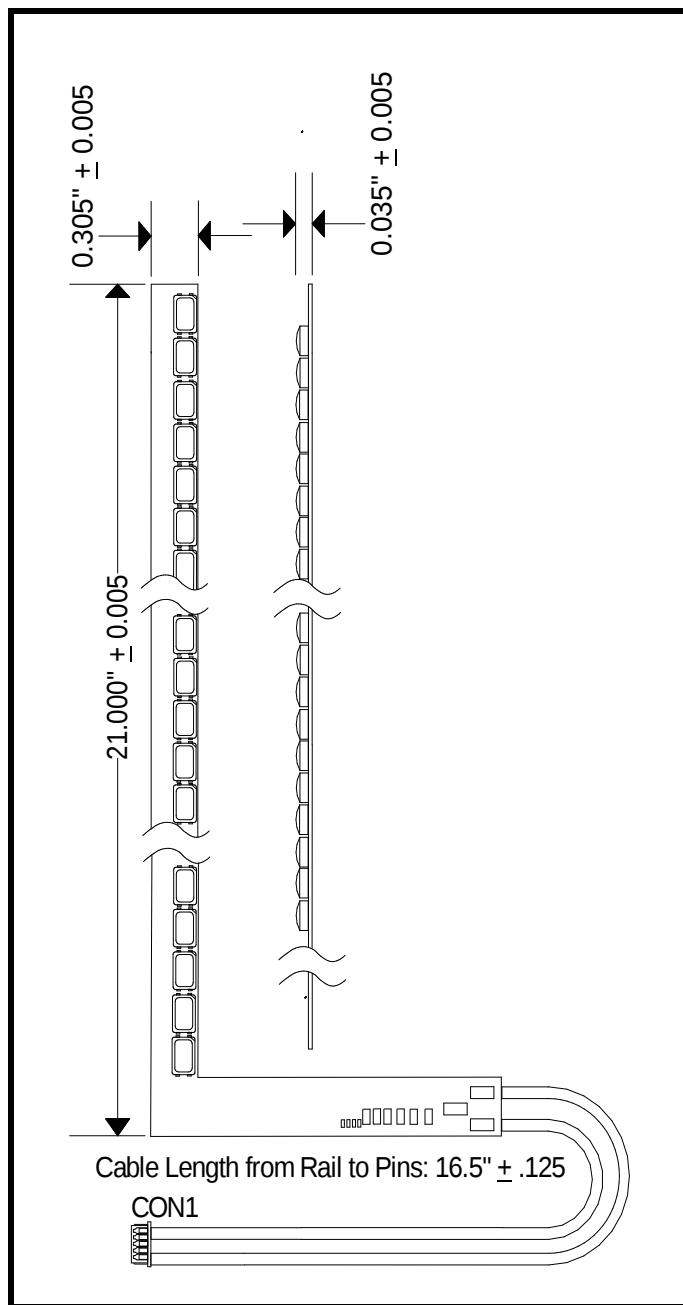

397 Route 281
Tully, New York 13159-1175
Phone: 315 696-6676
Email: sales@acipower.com
www.acipower.com

PRODUCT DATASHEET

MAXIMUM RATINGS

4/25/2022

Symbol	Parameter	Value	Unit
Tled	Operating temperature of LED edge light (light rail contact)	-30 to +85	Deg-C
Tstg	LED Rail storage temperature	-40 to +100	Deg-C
Ifwd	Maximum LED forward current (DC)	100	mA

LED OPTICAL CHARACTERISTICS

LED Manufacturer specifications for reference purpose only

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
BL	LED Brightness	Ifwd = 93mA		21.4		cd
X	White X coordinate			0.265		
Y	White Y coordinate			0.260		

LED RAIL ELECTRICAL CHARACTERISTICS

Ifwd = 83.3mA (6 banks per rail), Tled = +75Deg-C (LED's heat sinking to the display)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Vfwd	LED rail forward voltage drop		63.5	70.5	77.5	Vdc

TYPICAL LED RAIL PERFORMANCE GRAPHS

