



397 Route 281 – P.O. Box 1175
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

ACR-0866-1932

PRODUCT DATA SHEET – PAGE 1 OF 2

18.97" SIX BANK LED RAIL

(Six Bank, 86V @ 47mA)

7/27/10

GENERAL DESCRIPTION

The ACR-0866-1932 is designed as a replacement for field replaceable, tri tube, dual edge lit 22.0" CCFL displays.

The rail requires the use of a constant current source to properly drive the LED's.

The LED rail is compatible with any of ACI's I-Drive series of LED Drivers.

MECHANICAL / ENVIRONMENTAL

Weight = 15 grams

Altitude = 35,000 Ft maximum


Humidity < 95% non-condensing

Size (L x W x H) = 18.970 IN x 0.325 IN x .062 IN

PCB thickness = 0.032 IN

Input connector = CON1

RoHS compliant

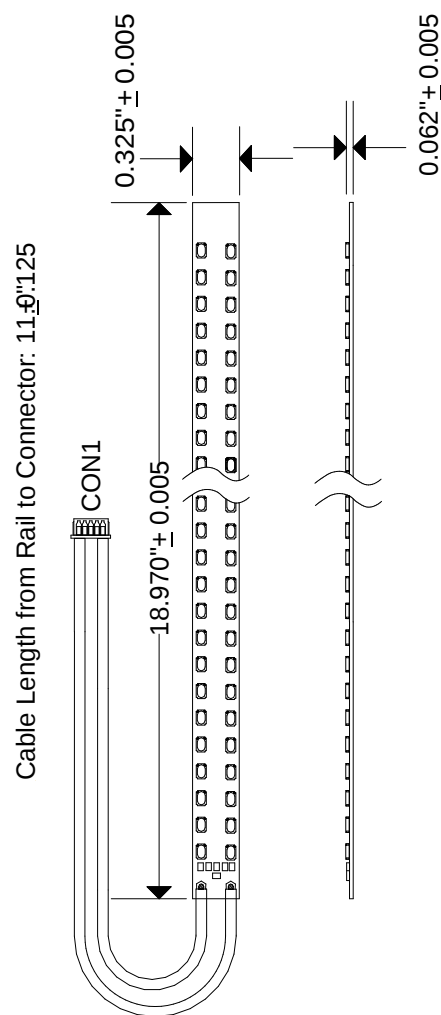

397 Route 281 – P.O. Box 1175
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

PRODUCT DATA SHEET – PAGE 2 OF 2

MAXIMUM RATINGS

7/27/10

Symbol	Parameter	Value	Unit
Tled	Operating temperature of LED edge light (light rail contact)	-40 to +100	Deg-C
Tstg	LED Rail storage temperature	-40 to +100	Deg-C
Ifwd	Maximum LED edge-light forward current (DC)	310	mA

LED OPTICAL CHARACTERISTICS

LED Manufacturer specifications for reference purpose only

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
BL	LED Brightness	Ifwd = 150mA	33	37	41	Lm
X	White X coordinate			0.31		-
Y	White Y coordinate			0.32		-

LED RAIL ELECTRICAL CHARACTERISTICS

Ifwd = 47mA, Tled = +75Deg-C (LED's without heat sinking to the display)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Vfwd	LED rail forward voltage drop		77	86	95	Vdc

TYPICAL LED RAIL PERFORMANCE GRAPHS

