



397 Route 281
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

ACR-0924-2700

PRODUCT DATA SHEET – PAGE 1 OF 3

19.20" QUAD BANK LED RAIL

(Quad Bank, 92V @ 66.25mA)

8/24/15

GENERAL DESCRIPTION

The ACR-0924-2700 is designed as a replacement for dual rail, dual edge lit 21.5" LED displays.

The rail requires the use of a constant current source to properly drive the LED's.

The LED rail is compatible with any of ACI's I-Drive series of LED Drivers.

MECHANICAL / ENVIRONMENTAL

Weight = 6 grams

Altitude = 35,000 Ft maximum


Humidity < 95% non-condensing

Size (L x W x H) = 19.200 IN x 0.39375 IN x 0.097 IN

Flex PCB thickness = 0.007 IN

Input connector = CON1

RoHS compliant

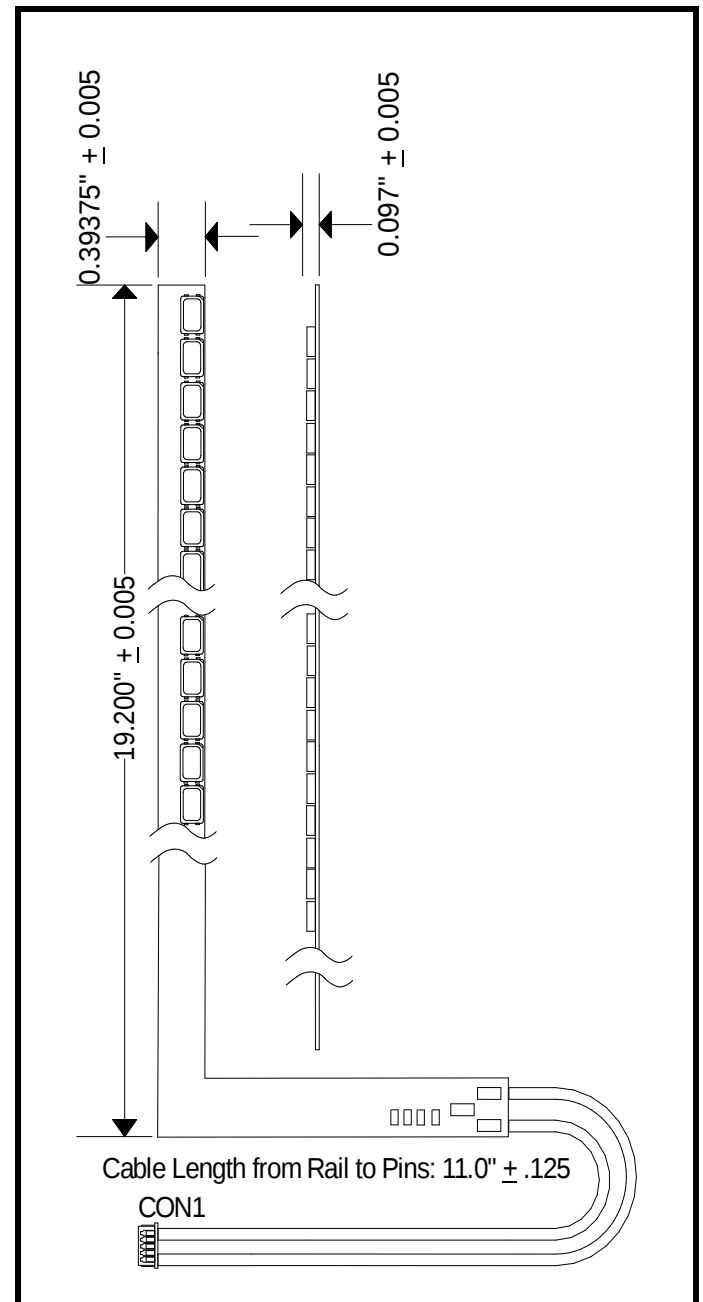

**397 Route 281
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com**

PRODUCT DATA SHEET – PAGE 2 OF 3

MAXIMUM RATINGS

8/24/15

Symbol	Parameter	Value	Unit
Tled	Operating temperature of LED edge light (light rail contact)	-30 to +85	Deg-C
Tstg	LED Rail storage temperature	-40 to +100	Deg-C
Ifwd	Maximum LED forward current (DC)	80	mA

LED OPTICAL CHARACTERISTICS

LED Manufacturer specifications for reference purpose only

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
BL	LED Brightness	Ifwd = 93mA		21.4		cd
X	White X coordinate			0.265		
Y	White Y coordinate			0.260		

LED RAIL ELECTRICAL CHARACTERISTICS

Ifwd = 66.25mA (4 banks per rail), Tled = +75Deg-C (LED's heat sinking to the display)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Vfwd	LED rail forward voltage drop		83	92	101	Vdc

TYPICAL LED RAIL PERFORMANCE GRAPHS

