



397 Route 281
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

ACR-2715

PRODUCT DATA SHEET – PAGE 1 OF 2

11.238" SIX BANK LED RAIL

(Six Bank, 25V @ 29.17mA)

02/04/16

GENERAL DESCRIPTION

The ACR-2715 is designed as a replacement for field replaceable, single edge lit 9.0" LED displays.

The rail requires the use of a constant current source to properly drive the LED's.

The LED rail is compatible with any of ACI's I-Drive series of LED Drivers.

MECHANICAL / ENVIRONMENTAL

Weight = 3 grams

Altitude = 35,000 Ft maximum


Humidity < 95% non-condensing

Size (L x W x H) = 11.238 IN x 0.169 IN x .047 IN

Flex thickness = 0.007 IN

Input connector = CON1

RoHS compliant

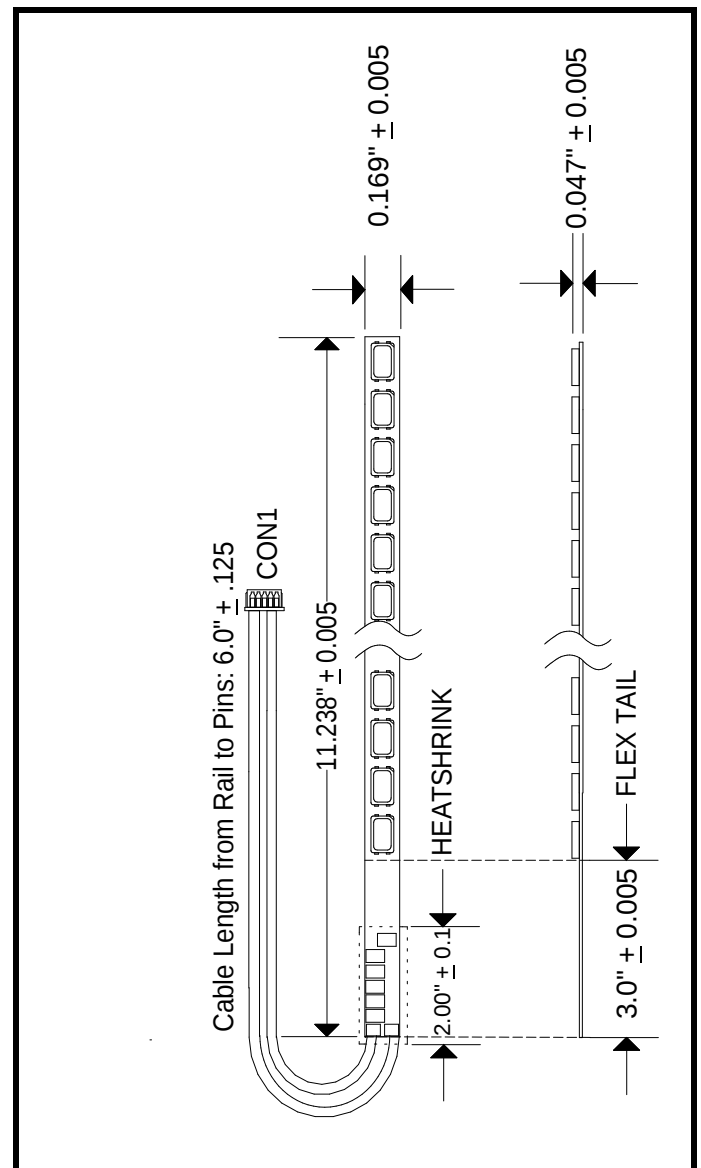

397 Route 281
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

PRODUCT DATA SHEET – PAGE 2 OF 2

MAXIMUM RATINGS

02/04/16

Symbol	Parameter	Value	Unit
Tled	Operating temperature of LED edge light (light rail contact)	-30 to +85	Deg-C
Tstg	LED Rail storage temperature	-40 to +100	Deg-C
Ifwd	LED forward current	35.0	mA

LED OPTICAL CHARACTERISTICS

LED Manufacturer specifications for reference purpose only

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Iv	Luminance Intensity Rank	Ifwd = 93mA	19.9	-	21.1	cd
X	White X coordinate			0.260		-
Y	White Y coordinate			0.270		-

LED RAIL ELECTRICAL CHARACTERISTICS

Ifwd = 29.17mA (6 Banks per Rail, 1 Rail per Display), Tled = +75Deg-C (LED's heat sinking to the display)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Vfwd	LED rail forward voltage drop		22.5	25.0	27.5	Vdc

TYPICAL LED RAIL PERFORMANCE GRAPHS

