



397 Route 281
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

ACR-2768

PRODUCT DATA SHEET – PAGE 1 OF 3

21.0" DUAL MODE LED RAIL

(Day LEDs: Six Banks, 70.5V @ 83.3mA)

(NVIS LEDs: Four Banks, 63V @ 30mA)

01/12/17

GENERAL DESCRIPTION

The ACR-2768 is designed as a replacement for dual rail, dual edge lit 23.8" / 24" LED displays.

The rail uses high performance LEDs capable of Day and NVIS Class B operations.

The rail requires the use of a constant current source to properly drive the LED's.

The LED rail is compatible with any of ACI's dual mode I-Drive series of LED Drivers.

MECHANICAL / ENVIRONMENTAL

Weight = 6 grams

Altitude = 35,000 Ft maximum


Humidity < 95% non-condensing

Size (L x W x H) = 21.000 IN x 0.175 IN x 0.096 IN

Flex PCB thickness = 0.007 IN

Input connector = CON1

RoHS compliant

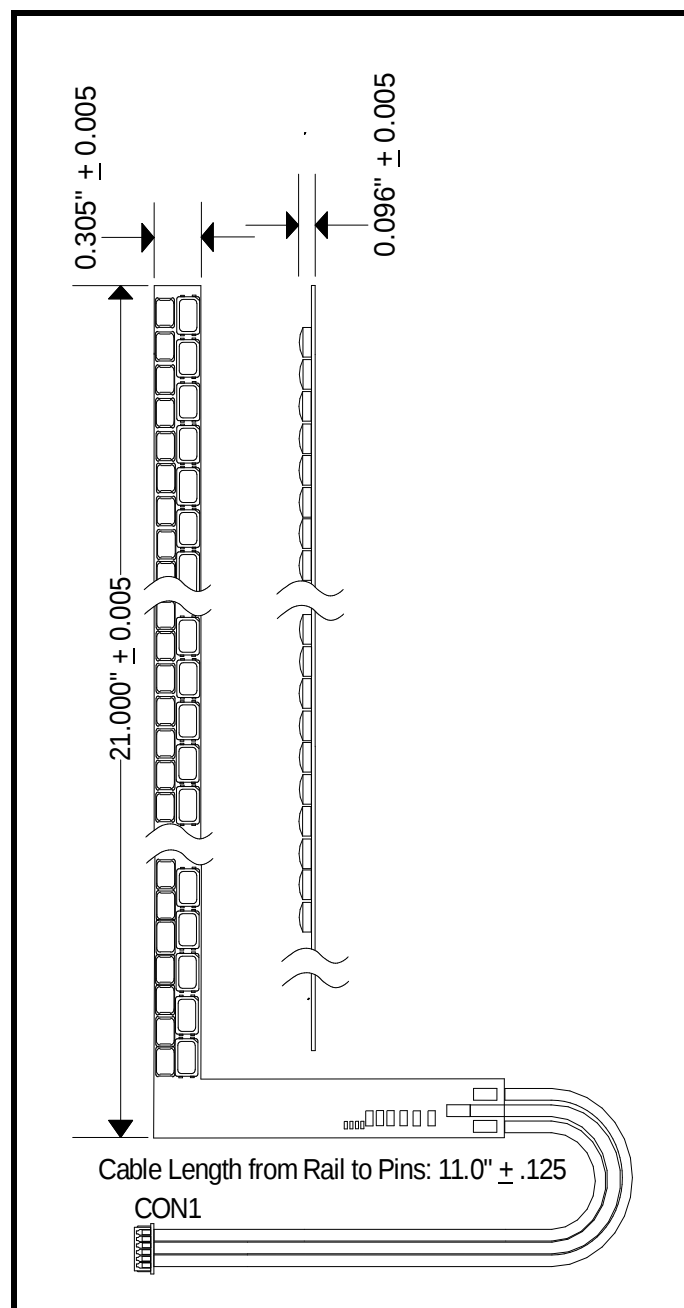

397 Route 281
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

PRODUCT DATA SHEET – PAGE 2 OF 3

DAY MODE

MAXIMUM RATINGS

01/12/17

Symbol	Parameter	Value	Unit
Tled	Operating temperature of LED edge light (light rail contact)	-30 to +85	Deg-C
Tstg	LED Rail storage temperature	-40 to +100	Deg-C
Ifwd	Maximum LED forward current (DC)	100	mA

LED OPTICAL CHARACTERISTICS

LED Manufacturer specifications for reference purpose only


Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
BL	LED Brightness	Ifwd = 93mA		21.4		cd
X	White X coordinate			0.265		
Y	White Y coordinate			0.260		

LED RAIL ELECTRICAL CHARACTERISTICS

Ifwd = 83.3mA (6 banks per rail), Tled = +75Deg-C (LED's heat sinking to the display)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Vfwd	LED rail forward voltage drop		63.5	70.5	77.5	Vdc

TYPICAL LED RAIL PERFORMANCE GRAPHS

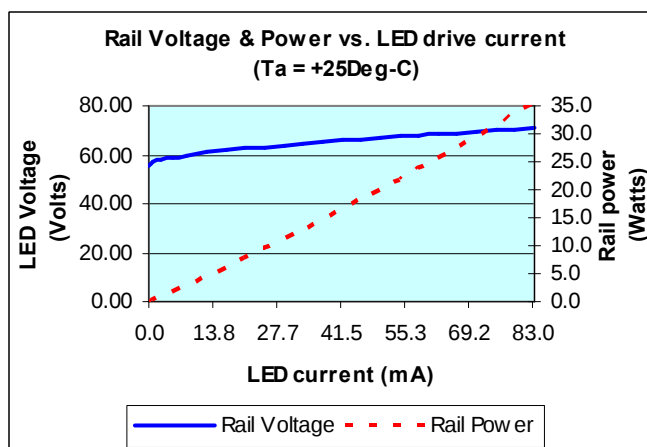

397 Route 281
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

PRODUCT DATA SHEET – PAGE 3 OF 3

NVIS MODE

MAXIMUM RATINGS

01/12/17

Symbol	Parameter	Value	Unit
Tled	Operating temperature of LED edge light (light rail contact)	-40 to +85	Deg-C
Tstg	LED Rail storage temperature	-40 to +100	Deg-C
Ifwd	Maximum LED forward current (DC)	36	mA

LED OPTICAL CHARACTERISTICS

LED Manufacturer specifications for reference purpose only

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
BL	LED Brightness	Ifwd = 20mA		80		mcd
X	White X coordinate			0.295		
Y	White Y coordinate			0.378		

LED RAIL ELECTRICAL CHARACTERISTICS

Ifwd = 30mA (4 banks per rail), Tled = +75Deg-C (LED's heat sinking to the display)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Vfwd	LED rail forward voltage drop		57	63	69	Vdc

TYPICAL LED RAIL PERFORMANCE GRAPHS

