



397 Route 281 – P.O. Box 1175
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

ACR-0801-1714

PRODUCT DATA SHEET – PAGE 1 OF 2

8.75" SINGLE BANK LED RAIL

(Single Bank, 74V @ 61mA)

02/17/10

GENERAL DESCRIPTION

The ACR-0801-1714 is designed as a replacement for field replaceable, dual tube, single edge lit 10.4" CCFL displays. The rail utilizes protection circuits to ensure the whole rail will not fail in the unlikely event of an individual LED failure.

The rail requires the use of a constant current source to properly drive the LED's.

The LED rail is compatible with both the I-Drive2 and I-Drive3 LED driver platforms.

MECHANICAL / ENVIRONMENTAL

Weight = 7.4 grams

Altitude = 35,000 Ft maximum


Humidity < 95% non-condensing

Size (L x W x H) = 8.750 IN x 0.240 IN x 0.128 IN

PCB thickness = 0.030 IN

Input connector = CON1

RoHS compliant

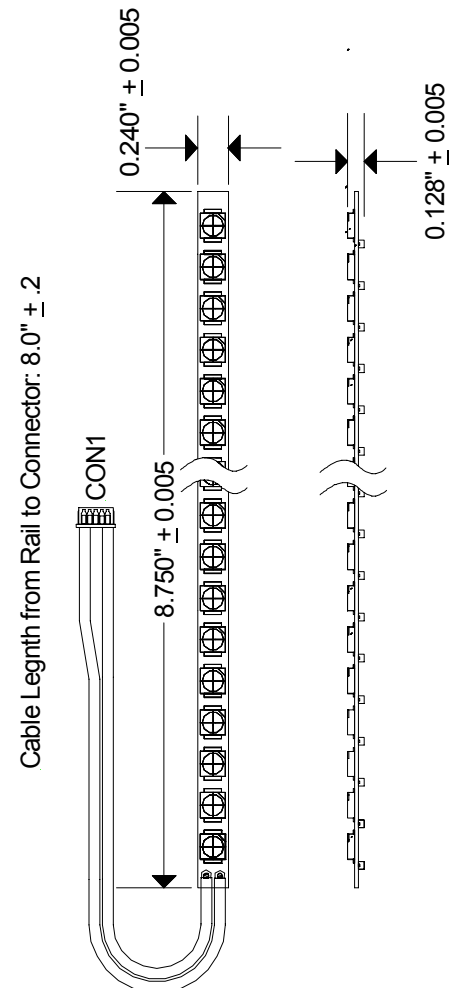

397 Route 281 – P.O. Box 1175
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

PRODUCT DATA SHEET – PAGE 2 OF 2

MAXIMUM RATINGS*

02/17/10

Symbol	Parameter	Value	Unit
Tled	Operating temperature of LED edge light (light rail contact)	-20 to +75	Deg-C
Tstg	LED Rail storage temperature	-40 to +105	Deg-C
Ifwd	Maximum LED edge-light forward current (DC)	150	Ma

*Maximum Ratings are those values beyond which damage may occur.

LED OPTICAL CHARACTERISTICS

LED Manufacturer specifications for reference purpose only

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
BL	LED Brightness	Ifwd = 350mA	51	55	60.5	Lm
X	White X coordinate			0.300		-
Y	White Y coordinate			0.295		-

LED RAIL ELECTRICAL CHARACTERISTICS

Ifwd = 61mA, Tled = +75Deg-C (LEDs without heat sinking to the display)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Vfwd	LED rail forward voltage drop		66	74	81	Vdc

TYPICAL LED RAIL PERFORMANCE GRAPHS

