



PROPRIETARY NOTE

THIS SPECIFICATION IS THE PROPERTY OF BOE HYDIS AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE HYDIS AND MUST BE RETURNED TO BOE HYDIS UPON ITS REQUEST.

TITLE : HV104X01-100
Product Specification for All American

Rev. O

BOE HYDIS TECHNOLOGY

SPEC. NUMBER	PRODUCT GROUP	REV.	ISSUE DATE	PAGE
S864-1272	TFT-LCD PRODUCT	O	2006.02.28	1 OF 25

		PRODUCT GROUP	REV.	ISSUE DATE
		TFT-LCD PRODUCT	O	2006.02.28
REVISION HISTORY				
REV.	ECN NO.	DESCRIPTION OF CHANGES	DATE	PREPARED
O	-	Initial Release	06.02.28	S.W. Kang
SPEC. NUMBER S864-1272		SPEC. TITLE HV104X01-100 Product Specification for All American		PAGE 2 OF 25

**PRODUCT GROUP**

REV.

ISSUE DATE

TFT-LCD PRODUCT

O

2006.02.28

Contents

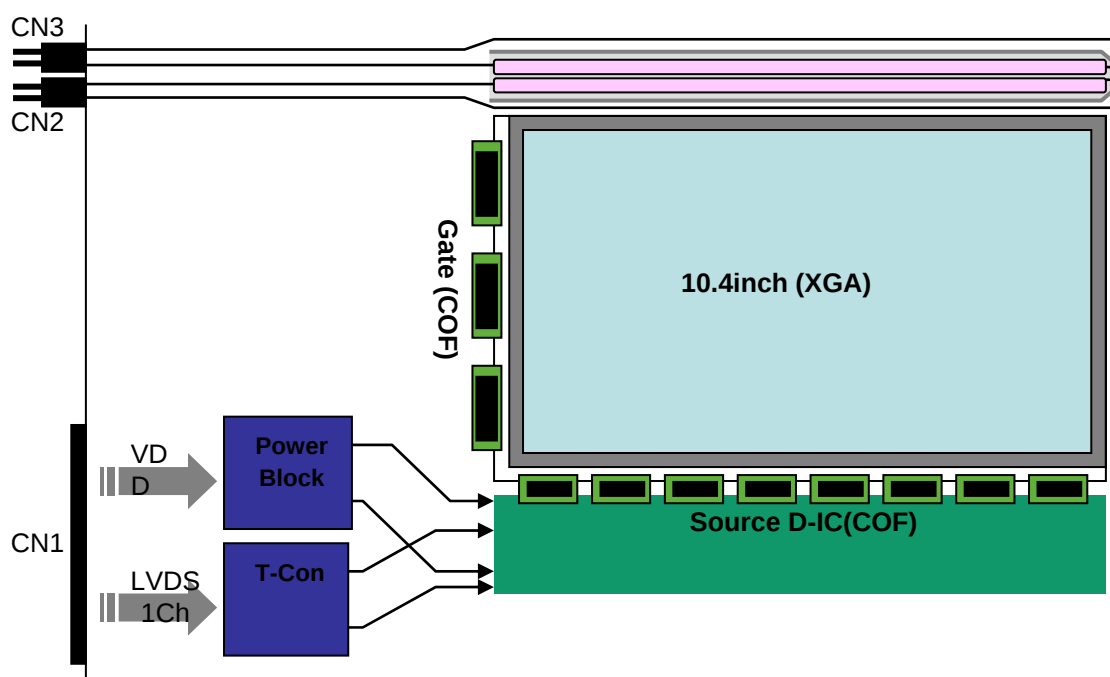
No	Item	Page
1.0	General Description	4
2.0	Absolute Maximum Ratings	5
3.0	Electrical Specifications	6
4.0	Optical Specifications	7
5.0	Interface Connection	9
6.0	Signal Timing Specifications	12
7.0	Input Signals, Display Colors & Gray Scale of Colors	14
8.0	Power Sequence	15
9.0	Mechanical Characteristics	16
10.0	Reliability Test	17
11.0	Handling & Cautions	18
12.0	Packing	19
13.0	Environment and Safety	20
14.0	Appendix	22

SPEC. NUMBER
S864-1272SPEC. TITLE
HV104X01-100 Product Specification
for All AmericanPAGE
3 OF 25

1.0 GENERAL DESCRIPTION

1.1 Introduction

HV104X01-100 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as active switching devices. This module has a 10.4 inch diagonally measured active area with XGA resolutions (1024 horizontal by 768 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 262,144 colors. The TFT-LCD panel used for this module is a low reflection and higher color type.



1.2 Features

- LVDS Interface with 1pixel / clock
- High Reliability Liquid Crystal Use
- 6-bit color depth, Display 262,144 colors
- Top-Side Edge type 2 lamps
- High luminance and contrast ratio, low reflection and wide viewing angle
- DE (Data Enable) mode only
- SLG (Single Level Gate) function use

1.3 Applications

- Module for Game Industry

**PRODUCT GROUP**

REV.

ISSUE DATE

TFT-LCD PRODUCT

O

2006.02.28

1.4 General Specifications

Parameter	Specification	Unit	Remark
Active area	210.432 X 157.824	mm	
Number of pixels	1024(H) × 768(V)	pixels	
Pixel pitch	0.2055(H) × 0.2055(V)	mm	
Pixel arrangement	RGB Vertical stripe		
Display colors	262,144	colors	
Display mode	Normally Black		
Dimensional outline	237.8(H) X 178.3(V) X 10.0(D) Typ.	mm	
Weight	485 Typ.	gram	
Back-light	Top-side edge 2-CCFL type		Note 1
Surface treatment	Haze 25, Anti-glare & hard-coating (3H)		

Note: 1. CCFL (Cold Cathode Fluorescent Lamp)

2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit.

[VSS = GND = 0V]

Parameter	Symbol	Min	Max	Unit	Remark
Power Input Voltage	V _{DD}	VSS-0.3	4.0	V	Ta = 25 °C
Logic Input Voltage	V _{IN}	VSS-0.3	V _{DD} +0.3	V	
Back-light Lamp Current	I _{BL}	2.0	7.0	mA	
Back-light lamp Frequency	F _L	40	80	KHz	
Operating Temperature	T _{OP}	-20	+70	°C	Note 1
Storage Temperature (Humidity)	T _{ST}	-20	+80	°C	
	RH		-	%	

Note 1. we could guarantee the readable condition at maximum temperature. And it could operate normally by driving function.

3.0 ELECTRICAL SPECIFICATIONS

SPEC. NUMBER S864-1272	SPEC. TITLE HV104X01-100 Product Specification for All American	PAGE 5 OF 25
---------------------------	---	-----------------



PRODUCT GROUP

REV.

ISSUE DATE

TFT-LCD PRODUCT

O

2006.02.28

[Ta = 25±2℃]

Parameter		Min	Typ	Max	Unit	Remark
Power Supply Voltage	V _{DD}	3.0	3.3	3.6	V	
Power Supply Current	I _{DD}	-	210	-	mA	Note1
Permissible Input Ripple Voltage	V _{RF}	-	-	100	mV	V _{DD} = 3.3V
High Level Differential Input Threshold Voltage	V _{IH}	-	-	+100	mV	V _{cm} = 1.2V typ.
Low Level Differential Input Threshold Voltage	V _{IL}	-100	-	-	mV	
Back-light Lamp Voltage	V _{BL}	-	520	-	V _{rms}	
Back-light Lamp Current	I _{BL}	2.0	6.0	7.0	mA _{rm}	
Back-light Lamp Frequency	F _L	40	60	80	KHz	Note 2
Lamp Start Voltage		-	-	950	V _{rms}	25℃, Note 3
		-	-	1150	V _{rms}	0℃, Note 3
Lamp Life		30,000	-	-	hrs	I _{BL} = 2.0~6.0mA
Power Consumption	P _D	-	0.8	-	W	
	P _{BL}	-	6.5	-	W	I _{BL} = 6.0mA, Note 4
	P _{total}	-	7.3	-	W	

Notes:

- The supply voltage is measured and specified at the interface connector of LCM.
The current draw and power consumption specified is for VDD = 3.3V, Frame rate = 60 Hz and Clock frequency = 65MHz.
Test Pattern of power supply current
a) Typ : Vertical color bar pattern
b) Max : Gray 228 @ Vertical 2 Skip line pattern
- The lamp frequency should be selected as different as possible from the horizontal synchronous frequency and its harmonics to avoid interference, which may cause line flow on the display
- The voltage above this value should be applied to the lamps for more than 1 second to startup. Otherwise the lamps may not to be turned on.
- Calculated value for reference (V_{BL} × I_{BL}) excluding inverter loss
This value is for 2 lamps.

4.0 OPTICAL SPECIFICATIONS

SPEC. NUMBER S864-1272	SPEC. TITLE HV104X01-100 Product Specification for All American	PAGE 6 OF 25
---------------------------	---	-----------------



PRODUCT GROUP

REV.

ISSUE DATE

TFT-LCD PRODUCT

O

2006.02.28

The measurement shall be executed after 30 minutes warm-up period.

Measuring equipment: TOPCON-BM5.

[VDD=3.3V, Frame rate=60Hz, Clock=65MHz, I_{BL} = 6.0mA, Ta = 25±2℃]

Parameter		Symbol	Condition	Min	Typ	Max	Unit	Remark
Viewing Angle	Horizontal	Θ_{3}	CR > 10	80	89	-	Deg	Note 1
		Θ_{9}		80	89	-	Deg	
	Vertical	Θ_{12}		80	89	-	Deg	
		Θ_{6}		80	89	-	Deg	
Contrast Ratio		CR	$\Theta = 0^{\circ}$ (Center) Normal Viewing Angle	-	500	-	-	Note 2
Luminance of white		Y_{L}		320	350	-	cd/m ²	Note 3
White luminance uniformity		ΔY		-	-	1.4	-	Note 4
Color Cord.	White	x_{W}		0.283	0.313	0.343	-	Note 5
		y_{W}		0.299	0.329	0.359	-	
	Red	x_{R}			-		-	
		y_{R}			-		-	
	Green	x_{G}			-		-	
		y_{G}			-		-	
	Blue	x_{B}			-		-	
		y_{B}			-		-	
Color Reproduction					40		%	
Response time	Ttotal (Tr + Td)	Ttotal		-	40	-	msec	Note 6
Cross talk		CT		-	-	2.0	%	Note 7

SPEC. NUMBER
S864-1272

SPEC. TITLE
HV104X01-100 Product Specification
for All American

PAGE
7 OF 25

**PRODUCT GROUP**

REV.

ISSUE DATE

TFT-LCD PRODUCT

O

2006.02.28

Note:

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 1 shown in Appendix).

2. Contrast measurements shall be made at viewing angle of $\Theta = 0^\circ$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state. (See FIGURE 1 shown in Appendix) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. Luminance of white is defined as a center point(#1) on LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.

4. The White luminance uniformity on LCD surface is then expressed as : $\Delta Y = \text{Maximum Luminance of 5 points} / \text{Minimum Luminance of 5 points}$ (see FIGURE 2 shown in Appendix).

5. The color chromaticity coordinates specified in Table 4 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.

6. The electro-optical response time measurements shall be made as FIGURE 3 shown in Appendix by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is Tr, and 90% to 10% is Td.

7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (Y_A) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (Y_B) of that same area when any adjacent area is driven dark. (See FIGURE 4 shown in Appendix).

SPEC. NUMBER
S864-1272

SPEC. TITLE
HV104X01-100 Product Specification
for All American

PAGE
8 OF 25

**PRODUCT GROUP**

REV.

ISSUE DATE

TFT-LCD PRODUCT

O

2006.02.28

5.0 INTERFACE CONNECTION**5.1 Electrical Interface**

CN1 Interface connector : DF19L-14P-1H (HIROSE) or equivalent

User side connector : DF19G-14S-1C (HIROSE) or equivalent

Pin No	Symbol	Function	Remark
1	VDD1	Power Supply: +3.3V	
2	VDD2	Power Supply: +3.3V	
3	VSS	Ground	
4	VSS	Ground	
5	RIN0-	LVDS Negative data signal (-)	Tx pin # 48
6	RIN0+	LVDS Positive data signal (+)	Tx pin # 47
7	RIN1-	LVDS Negative data signal (-)	Tx pin # 46
8	RIN1+	LVDS Positive data signal (+)	Tx pin # 45
9	RIN2-	LVDS Negative data signal (-)	Tx pin # 42
10	RIN2+	LVDS Positive data signal (+)	Tx pin # 41
11	RCLKIN-	LVDS Negative clock signal (-)	Tx pin # 40
12	RCLKIN+	LVDS Positive clock signal (+)	Tx pin # 39
13	VSS	Ground	
14	VSS	Ground	

5.2 Back-light Interface

CN2 / CN3 Connector : BHSR-02VS-1 (JST) or equivalent

User side connector : SM02B-BHSS-1 (JST) or equivalent

Pin No	INPUT	Function
1	HOT	High Voltage
2	COLD	Ground

SPEC. NUMBER
S864-1272SPEC. TITLE
HV104X01-100 Product Specification
for All AmericanPAGE
9 OF 25



PRODUCT GROUP

REV.

ISSUE DATE

TFT-LCD PRODUCT

O

2006.02.28

5.3 LVDS Interface

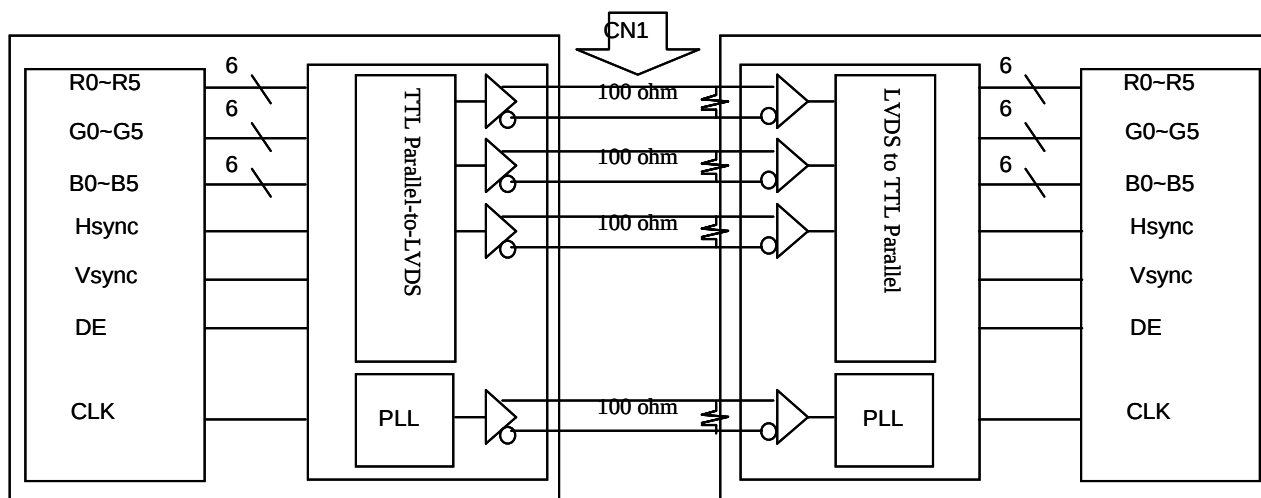
LVDS Transmitter: THC63LVDM83A or equivalent.

Input signal	Transmitter		Interface		DF19L-14P-1H	Remark
	Pin No	Pin No	System (Tx)	TFT-LCD (Rx)	Pin No.	
R0	51	48 47	OUT0- OUT0+	IN0- IN0+	5 6	
R1	52					
R2	54					
R3	55					
R4	56					
R5	3					
G0	4	46 45	OUT1- OUT1+	IN1- IN1+	7 8	
G1	6					
G2	7					
G3	11					
G4	12					
G5	14					
B0	15	42 41	OUT2- OUT2+	IN2- IN2+	9 10	
B1	19					
B2	20					
B3	22					
B4	23					
B5	24					
HSYNC	27					
VSYNC	28					
DE	30					
MCLK	31	40 39	CLKOUT- CLKOUT+	CLKIN- CLKIN+	11 12	

SPEC. NUMBER
S864-1272


SPEC. TITLE
HV104X01-100 Product Specification
for All American

PAGE
10 OF 25



[LVDS Interface Block Diagram]

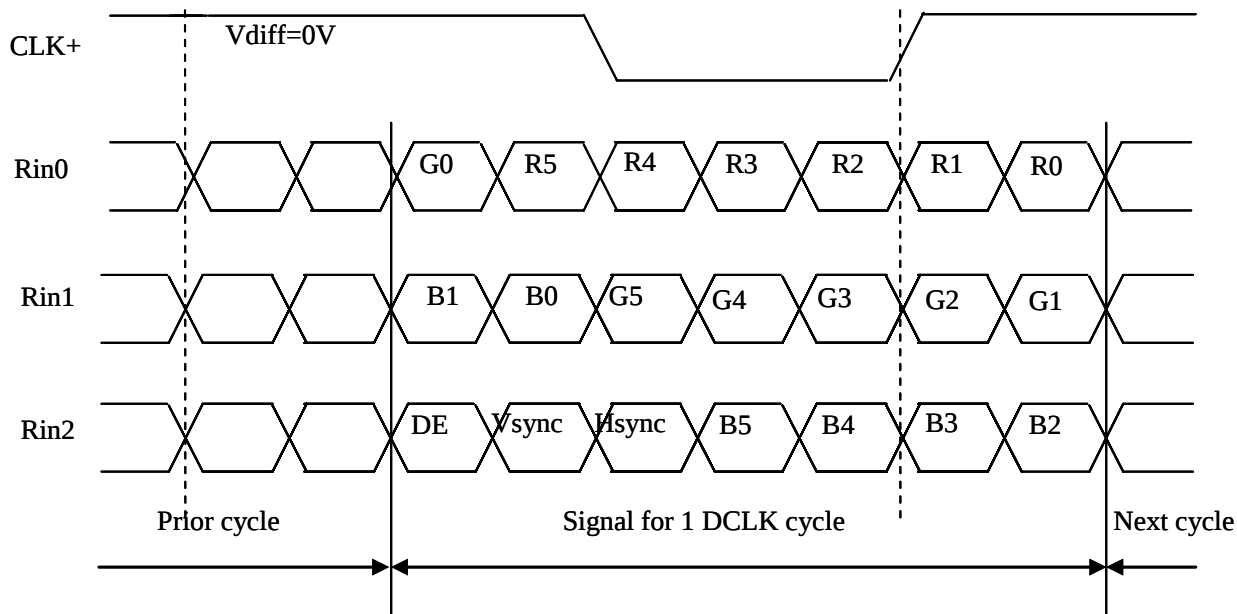5.4 LVDS Input Signal



6.0 SIGNAL TIMING SPECIFICATIONS

SPEC. NUMBER
S864-1272

SPEC. TITLE
HV104X01-100 Product Specification
for All American

PAGE
11 OF 25



PRODUCT GROUP

REV.

ISSUE DATE

TFT-LCD PRODUCT

O


2006.02.28

6.1 Signal Timing Specification

The HV104X01-100 is operated by the only DE (Data enable) mode (LVDS Transmitter Input)

Item	Symbols	Min	Typ	Max	Unit
Frame Period	T1	772	806	1022	lines
Vertical Display Period	T2	768	768	768	lines
One line Scanning Period	T3	1100	1344	2046	clocks
Horizontal Display Period	T4	1024	1024	1024	clocks
Clock Frequency	1/T5	-	65	80	MHz

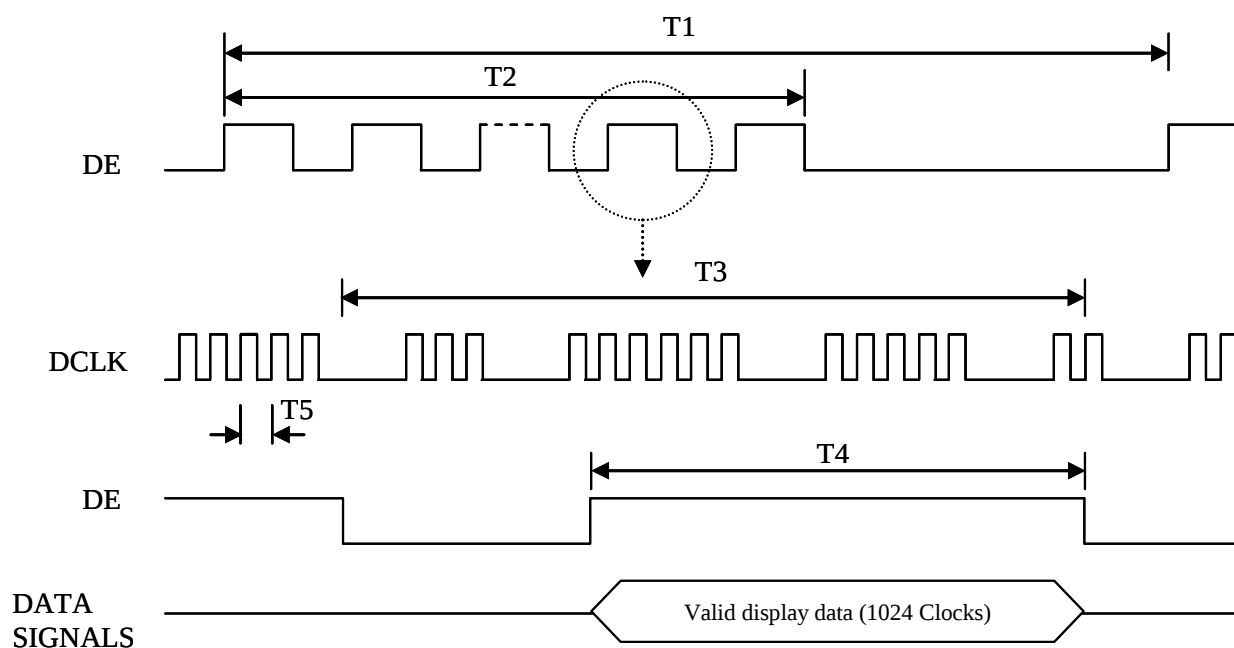6.2 Signal Timing Waveform



SPEC. NUMBER
S864-1272

SPEC. TITLE
HV104X01-100 Product Specification
for All American

PAGE
12 OF 25

**PRODUCT GROUP**

REV.

ISSUE DATE

TFT-LCD PRODUCT

O

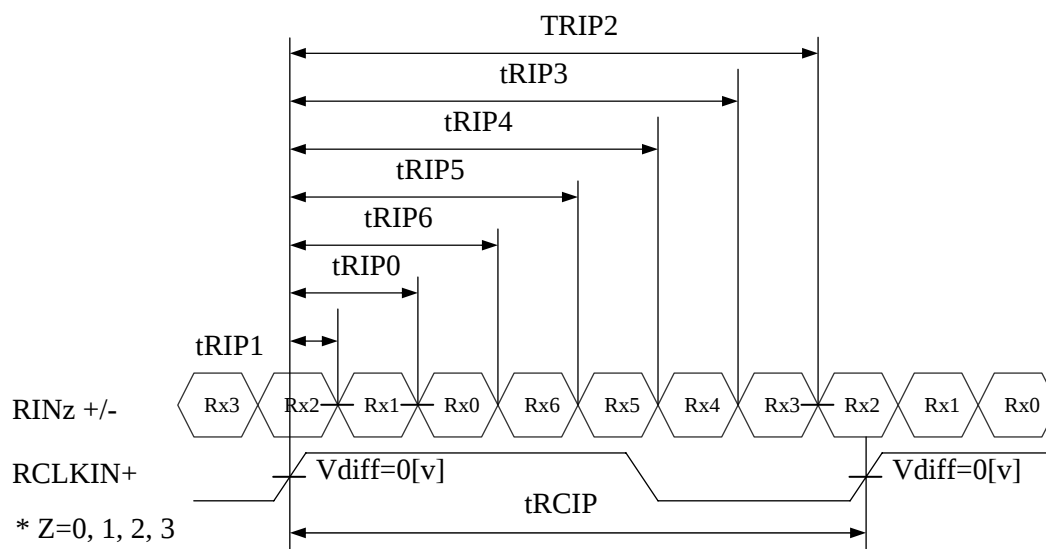
2006.02.28

6.3 LVDS Rx interface timing parameter

The specification of the LVDS Rx interface timing parameter

<LVDS Rx Interface Timing Specification>

Item	Symbol	Min	Typ	Max	Unit	Remark
CLKIN Period	tRCIP	12.5	15.38	-	nsec	
Input Data 0	tRIP1	-0.4	0.0	+0.4	nsec	
Input Data 1	tRIP0	$1 \cdot t_{RCIP}/7$ -0.4	$1 \cdot t_{RCIP}/7$	$1 \cdot t_{RCIP}/7$ +0.4	nsec	
Input Data 2	tRIP6	$2 \cdot t_{RCIP}/7$ -0.4	$2 \cdot t_{RCIP}/7$	$2 \cdot t_{RCIP}/7$ +0.4	nsec	
Input Data 3	tRIP5	$3 \cdot t_{RCIP}/7$ -0.4	$3 \cdot t_{RCIP}/7$	$3 \cdot t_{RCIP}/7$ +0.4	nsec	
Input Data 4	tRIP4	$4 \cdot t_{RCIP}/7$ -0.4	$4 \cdot t_{RCIP}/7$	$4 \cdot t_{RCIP}/7$ +0.4	nsec	
Input Data 5	tRIP3	$5 \cdot t_{RCIP}/7$ -0.4	$5 \cdot t_{RCIP}/7$	$5 \cdot t_{RCIP}/7$ +0.4	nsec	
Input Data 6	tRIP2	$6 \cdot t_{RCIP}/7$ -0.4	$6 \cdot t_{RCIP}/7$	$6 \cdot t_{RCIP}/7$ +0.4	nsec	



$$* V_{diff} = (RINz+) - (RINz-), (RCLKIN+) - (RCLKIN-)$$

SPEC. NUMBER
S864-1272SPEC. TITLE
HV104X01-100 Product Specification
for All AmericanPAGE
13 OF 25

**PRODUCT GROUP**

REV.

ISSUE DATE

TFT-LCD PRODUCT

O

2006.02.28

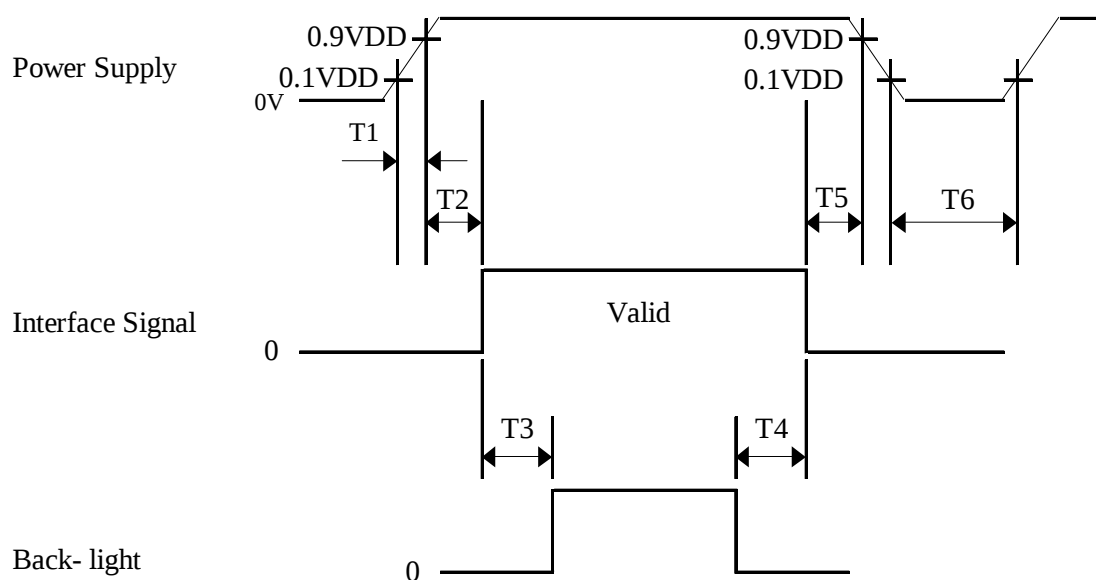
7.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

Colors & Gray Scale		Red Data						Green Data						Blue Data					
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale Of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Darker △	↓						↓						↓					
	▽	↓						↓						↓					
	Brighter	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	▽	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
Gray Scale Of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	Darker △	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
	▽	↓						↓						↓					
	Brighter	0	0	0	0	0	0	1	1	1	1	0	1	0	0	0	0	0	0
	▽	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Gray Scale Of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Darker △	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	▽	↓						↓						↓					
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	1
	▽	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
Gray Scale Of White & Black	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0	0	1
	Darker △	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0	0	1	0
	▽	↓						↓						↓					
	Brighter	1	1	1	1	0	1	1	1	1	1	0	1	1	1	1	1	0	1
	▽	1	1	1	1	1	0	1	1	1	1	1	0	1	1	1	1	1	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

SPEC. NUMBER
S864-1272SPEC. TITLE
HV104X01-100 Product Specification
for All AmericanPAGE
14 OF 25

8.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence should be as shown in below



- $0 < T1 \leq 10 \text{ ms}$
- $0 < T2 \leq 50 \text{ ms}$
- $100 \text{ ms} \leq T3, T4$
- $0 < T5 \leq 50 \text{ ms}$
- $1 \text{ sec} < T6$

Notes:

1. When the power supply VDD is 0V, Keep the level of input signals on the low or keep high impedance.
2. Do not keep the interface signal high impedance when power is on.
3. Back Light must be turn on after power for logic and interface signal are valid.

**PRODUCT GROUP**

REV.

ISSUE DATE

TFT-LCD PRODUCT

O

2006.02.28

9.0 MECHANICAL CHARACTERISTICS**9.1 Dimensional Requirements**

FIGURE 5, 6 shown in appendix shows mechanical outlines for the model.

Parameter	Specification	Unit
Dimensional outline		
Horizontal	238.6 ± 0.5	mm
Vertical	173.2 ± 0.5	
Thickness	10.0 Typ.	
Weight	485 Typ.	gram
Active area	$210.432 (H) \times 157.824 (V)$	mm
Pixel pitch	$0.2055 (H) \times 0.2055 (V)$	mm
Number of pixels	$1024 (H) \times 768 (V)$	pixels

9.2 Mounting

See FIGURE 5 shown in appendix

9.3 Anti-Glare and Polarizer Hardness.

The surface of the LCD has an anti-glare coating to minimize reflection and a coating to reduce scratching.

9.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50 cm from the screen with an overhead light level of 150lux. The manufacture shall furnish limit samples of the panel showing the light leakage acceptable.

SPEC. NUMBER
S864-1272

SPEC. TITLE
HV104X01-100 Product Specification
for All American

PAGE
16 OF 25



PRODUCT GROUP

REV.

ISSUE DATE

TFT-LCD PRODUCT

O

2006.02.28

10.0 RELIABILITY TEST

No	Test Items	Conditions
1	High temperature storage test	Ta = 80 °C, 240 hrs
2	Low temperature storage test	Ta = -20 °C, 240 hrs
3	High temperature & high humidity operation test	Ta = 50 °C, 80 %RH, 240 hrs
4	High temperature operation test	Ta = 70 °C (Note 1)
5	Low temperature operation test	Ta = -20 °C, 240 hrs
6	Thermal shock	Ta = -20 °C ↔ 60 °C (30 min), 100 cycle
7	Vibration test (non-operating)	Frequency : 10 ~ 300 Hz Gravity/AMP : 1.5G Period : X, Y, Z / 0.5 Hr.
8	Shock test (non-operating)	Gravity : 50G Pulse width : 11ms, half sine wave ±X, ±Y, ±Z Once for each direction
9	Electrostatic discharge test	Air : 150 pF, 330Ω , 15KV Contact : 150 pF, 330Ω , 8KV

Note 1. we could guarantee the readable condition at maximum temperature. And it could operate normally by driving function.

SPEC. NUMBER
S864-1272

SPEC. TITLE
HV104X01-100 Product Specification
for All American

PAGE
17 OF 25

**PRODUCT GROUP**

REV.

ISSUE DATE

TFT-LCD PRODUCT

O

2006.02.28

11.0 HANDLING & CAUTIONS**11.1 Cautions when taking out the module**

- Pick the pouch only, when taking out module from a shipping package.

11.2 Cautions for handling the module

- As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and backlight element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
- Do not pull the interface connector in or out while the LCD module is operating.
- Put the module display side down on a flat horizontal plane.
- Handle connectors and cables with care.

11.3 Cautions for the operation

- When the module is operating, do not lose MCLK, DE signals. If any one of these signals were lost, the LCD panel would be damaged.
- Obey the supply voltage sequence. If wrong sequence were applied, the module would be damaged.

11.4 Cautions for the atmosphere

- Dewdrop atmosphere should be avoided.
- Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer-packing pouch and under relatively low temperature atmosphere is recommended.

11.5 Cautions for the module characteristics

- Do not apply fixed pattern data signal to the LCD module at product aging.
- Applying fixed pattern for a long time may cause image sticking.

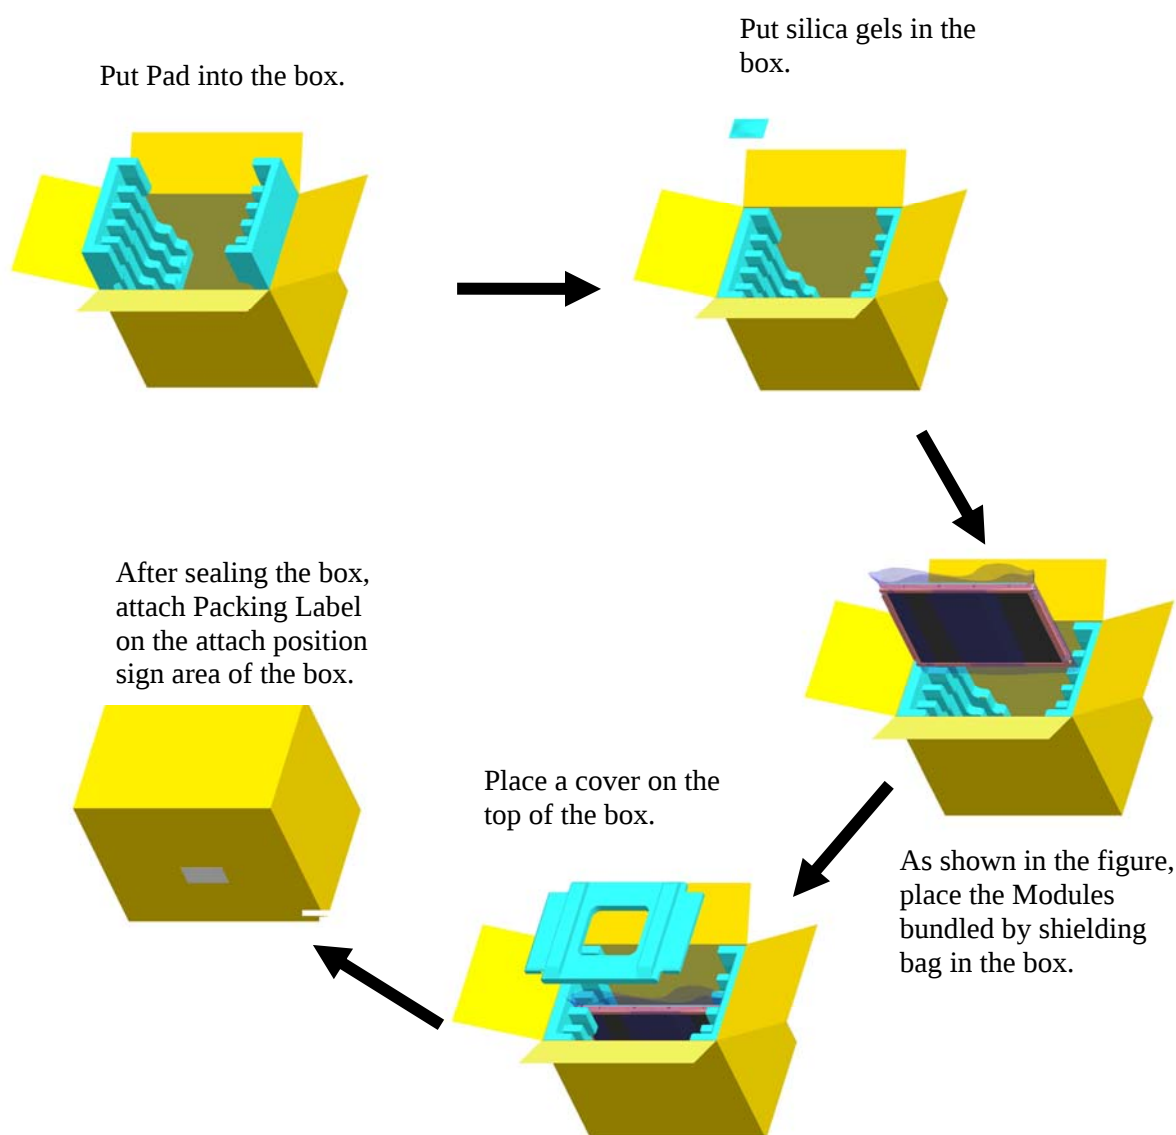
11.6 Other cautions

- Do not disassemble and/or re-assemble LCD module.
- Do not re-adjust variable resistor or switch etc.
- When returning the module for repair or etc, please pack the module not to be broken. We recommend using the original shipping packages.

SPEC. NUMBER
S864-1272SPEC. TITLE
HV104X01-100 Product Specification
for All AmericanPAGE
18 OF 25

12.0 PACKING

12.1 Packing Order (Internal Package)



Note


- 1) Total weight : Approx. 5.0kg
- 2) Box Dimension: 349mm(W) x 261mm(D) x 311mm(H)
- 3) Package Quantity in one Box: 9pcs

	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	O	2006.02.28

13.0 Environment & Safety

13.1 Packing Label

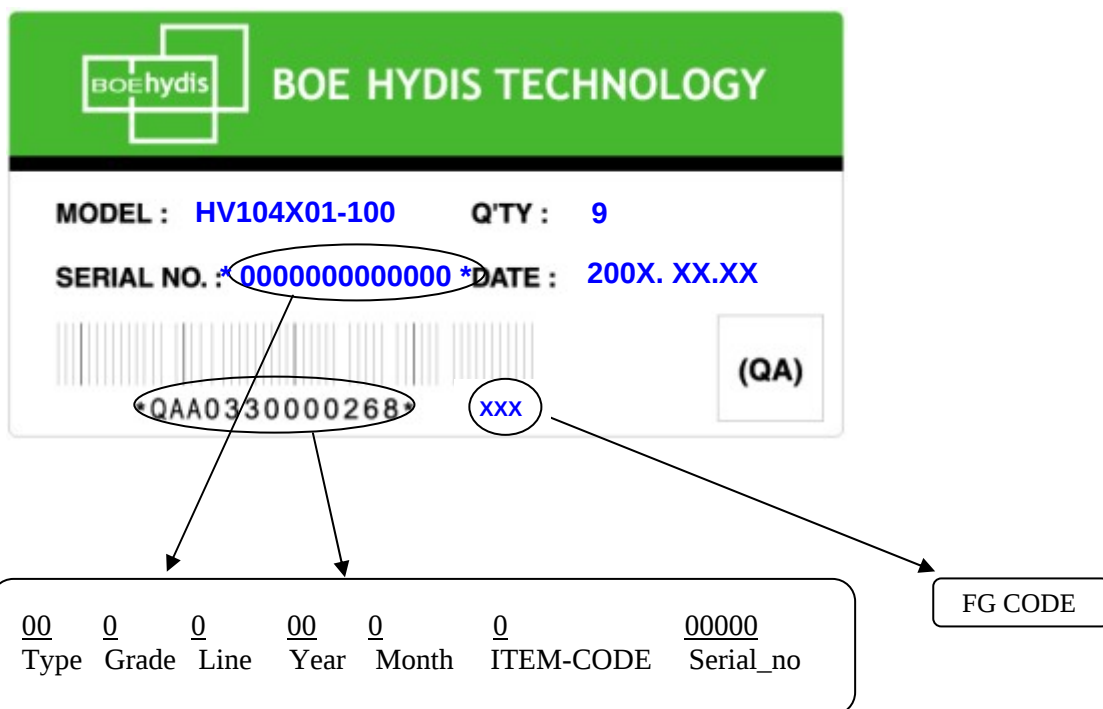- Label Size: 108 mm (L) × 56 mm (W)
- Contents
Model: HV104X01-100
Q`ty: Module Q`ty in one box
Serial No.: Box Serial No. See next figure for detail description.
Date: Packing Date
FG Code: FG Code of Product



13.2 Mercury disposal & High voltage caution

	HIGH VOLTAGE CAUTION	COLD CATHODE FLUORESCENT LAMP IN LCD PANEL CONTAINS A SMALL AMOUNT OF MERCURY. PLEASE FOLLOW LOCAL OR- DINANCES OR REGULATIONS FOR DISPOSAL.
	RISK OF ELECTRIC SHOCK. DISCONNECT THE ELECTRIC POWER BEFORE SERVICING	

SPEC. NUMBER S864-1272	SPEC. TITLE HV104X01-100 Product Specification for All American	PAGE 20 OF 25
---------------------------	---	------------------

	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	O	2006.02.28

13.3 Product Label



1	2	3	4	5	6	7
X X	X	X	X X	X	X X X X	X X X X X X

Type

No 1. Control

No 2. Rank

No 3. Line Classification(BOE HYDIS : H, LCM : L, BOE OT : A/B/C)

No 4. Year(2001 : 01, 2002 : 02, ...)



No 5. Month(1, 2, 3, ..., 9 X, Y, Z)

No 6. FG Code

No 7. Serial No.

14.0 APPENDIX

SPEC. NUMBER S864-1272	SPEC. TITLE HV104X01-100 Product Specification for All American	PAGE 21 OF 25
---------------------------	---	------------------

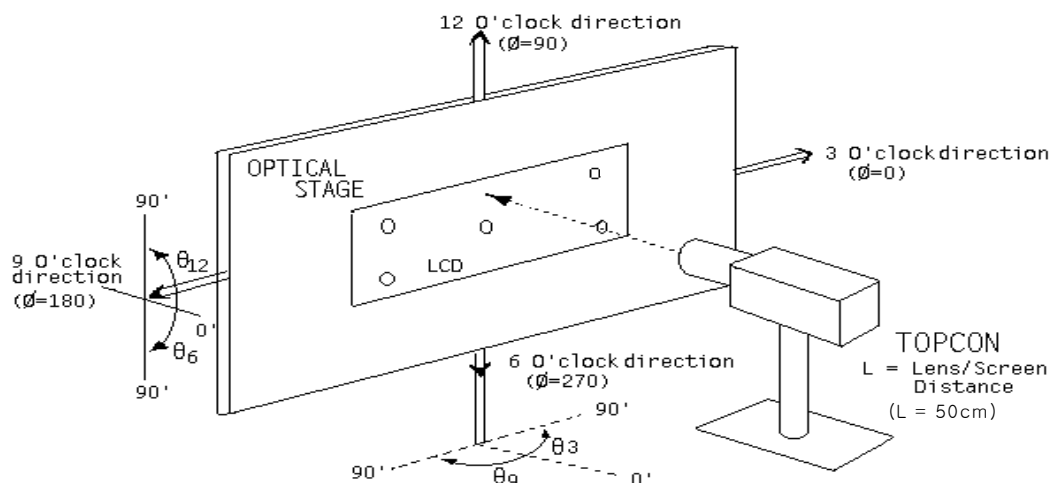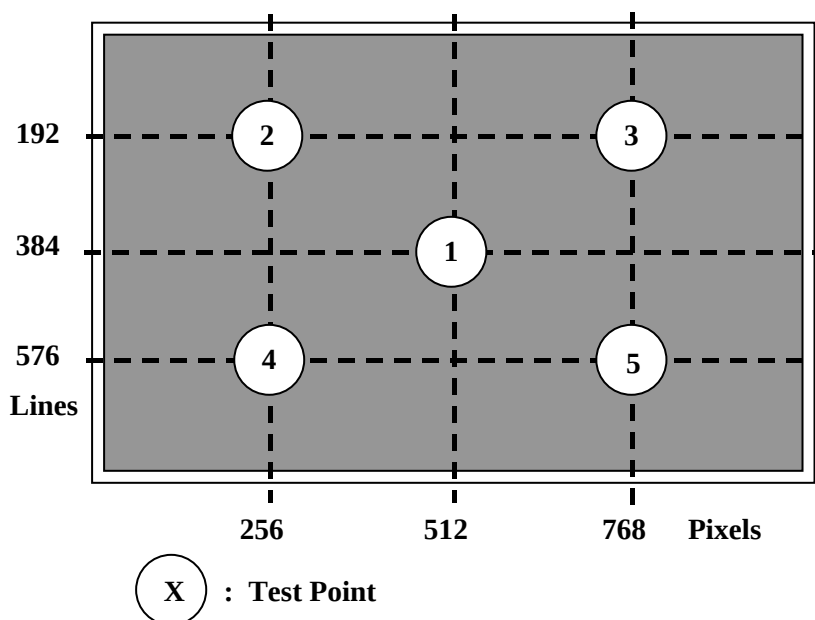Figure 1. Measurement Set Up

Figure 2. Average Luminance Measurement Locations & Uniformity Measurement Locations


	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	O	2006.02.28

Figure 3. Response Time Testing


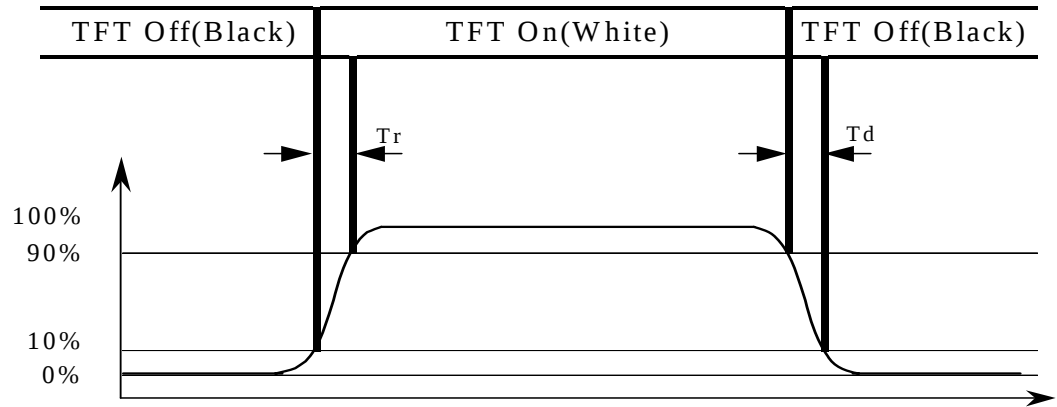


Figure 4. Cross Modulation Test Description

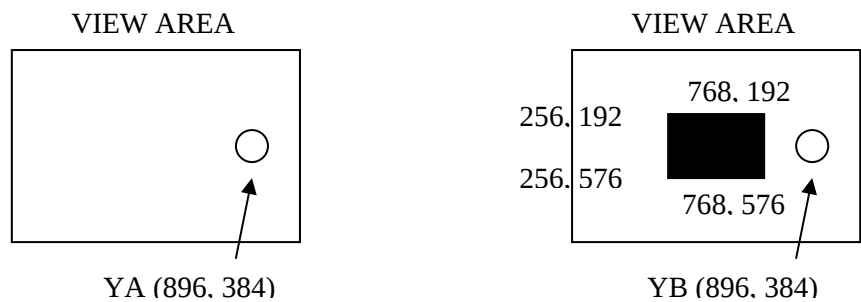

$$\text{Cross-Talk} = \left| \frac{Y_B - Y_A}{Y_A} \right| \times 100$$


Where:

Y_A = Initial luminance of measured area (cd/m²)

Y_B = Subsequent luminance of measured area (cd/m²)


The location measured will be exactly the same in both patterns.

SPEC. NUMBER S864-1272	SPEC. TITLE HV104X01-100 Product Specification for All American	PAGE 23 OF 25
---------------------------	---	------------------

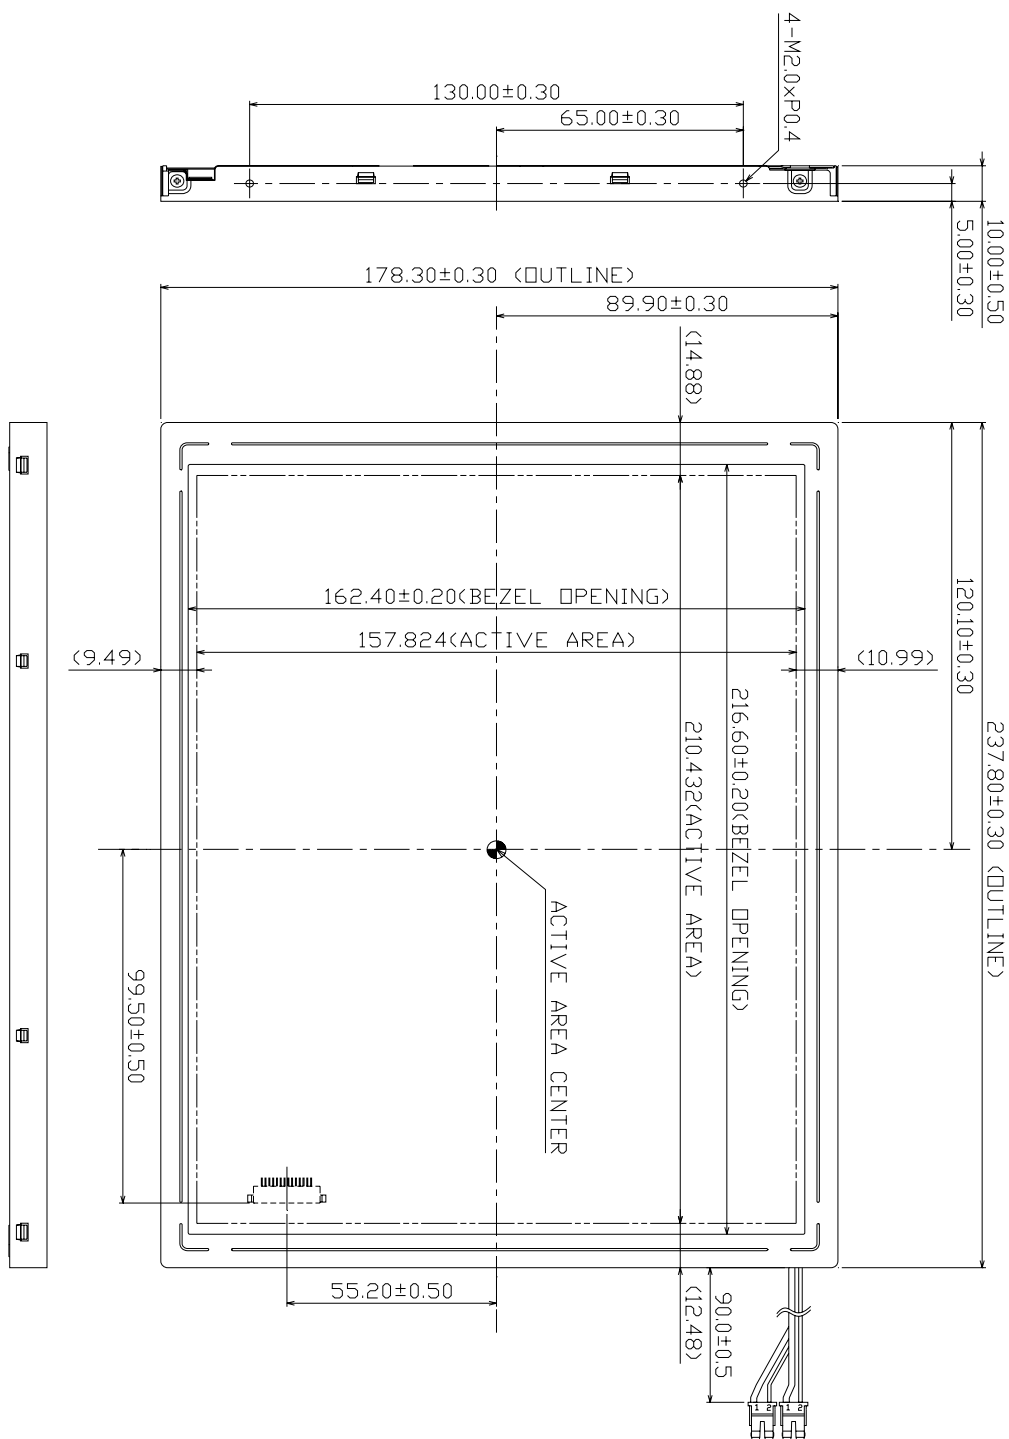Figure 5. TFT-LCD Module Outline Dimensions (Front view)


	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	O	2006.02.28

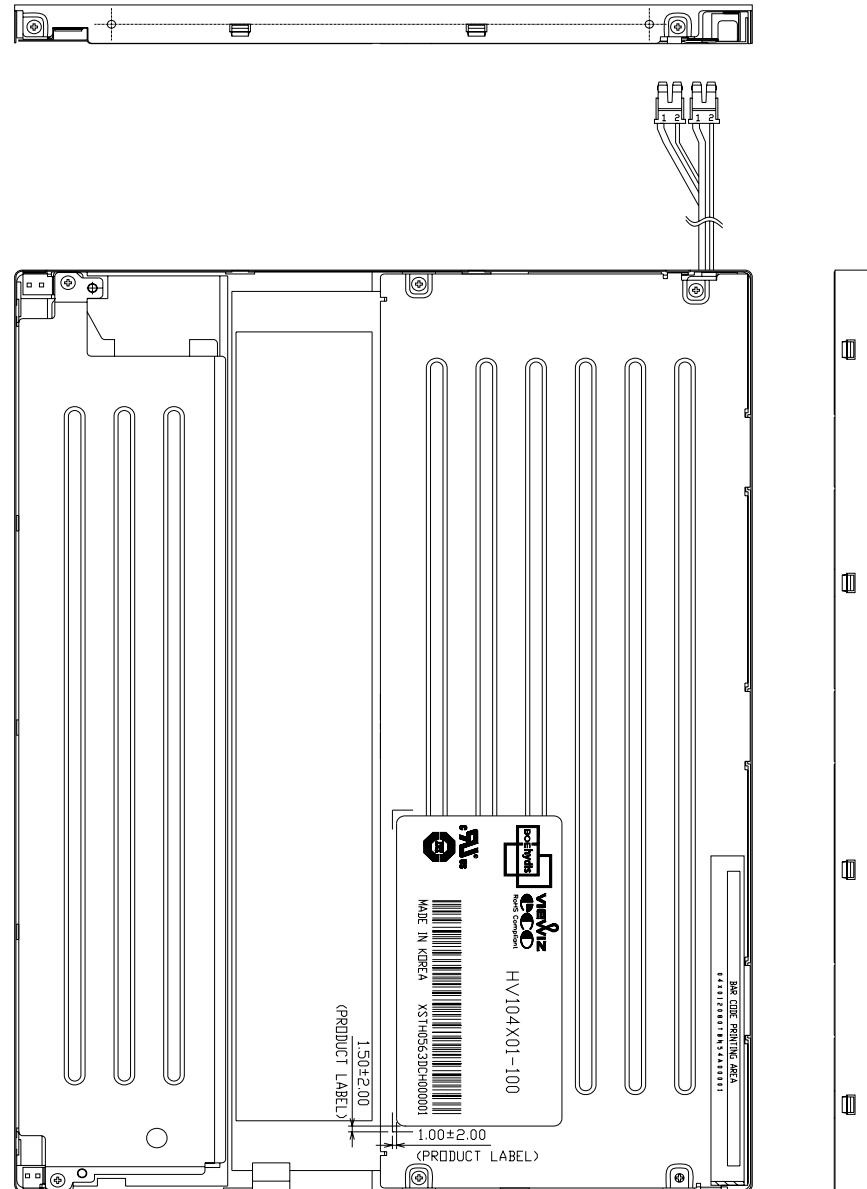Figure 6. TFT-LCD Module Outline Dimensions (Rear view)



NOTE

1. CN1: DF19K-20P-1H (20PIN/HIROSE)
2. CN2: BHSR-02VS-1 (2PIN/JST)
3. SCREW TORQUE : 2.3Kgf-cm
4. GENERAL TOLERANCE: ±0.50

SPEC. NUMBER S864-1272	SPEC. TITLE HV104X01-100 Product Specification for All American	PAGE 25 OF 25
---------------------------	---	------------------