


*** NOTE: USE IIP 04 for Incoming Cable Assembly
Inspection - ACI use ONLY

CONNECTOR RUN LIST:

FROM	TO	WIRE COLOR
P1-1	P2-1	RED
P1-2	P2-4	RED
P1-3	P2-5	RED
P1-4	P2-8	RED
P1-5	P2-9	RED
P1-6	P2-3	BLACK
P1-7	P2-2	BLACK
P1-8	P2-6	BLACK
P1-9	P2-7	BLACK
P1-10	P2-10	BLACK

This connector connects
to Led Driver Output

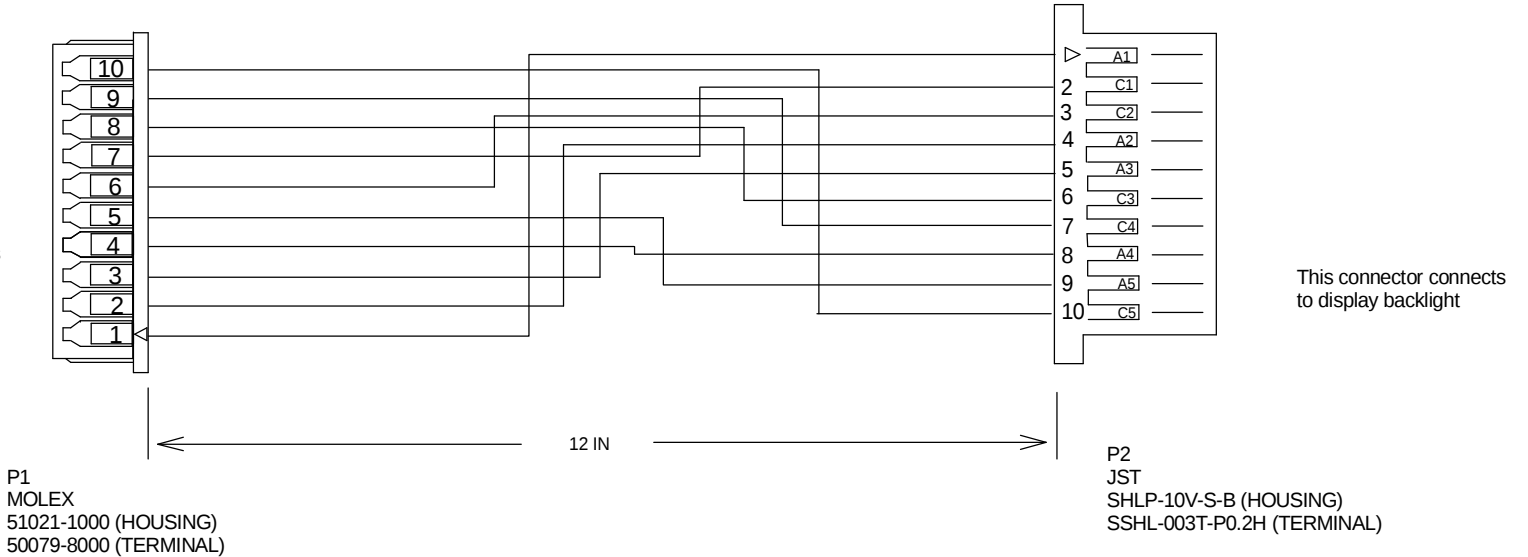

BOM				
REF.	QTY	MANUFACTURER	P/N	DESCRIPTION
P1	1	MOLEX	51021-1000	CONNECTOR HOUSING, 10 CIRCUIT
P1	10	MOLEX	50079-8000	CONTACT SOCKET (NOT SHOWN)
P2	1	JST	SHLP-10V-S-B	CONNECTOR HOUSING, 10 CIRCUIT
P2	10	JST	SSHL-003T-P0.2H	CONTACT SOCKET (NOT SHOWN)
WIRE, RED	AR	ALPHA WIRE OR EQUIVALENT	2842/7 RED	WIRE, RED, 28 (7/36) AWG, 105C
WIRE, BLACK	AR	ALPHA WIRE OR EQUIVALENT	2842/7 BLACK	WIRE, BLACK, 28 (7/36) AWG, 105C

Cable Assembly, Output, RoHS Compliant
(Connects output of ID6P to 1x5-channel Conn.)

LABEL INSTRUCTIONS

DRAWING NOT TO SCALE

SHEET 1 OF 1, 1/09/15

SD-0550

APPLIED CONCEPTS, INC.

27-R0118