


CONNECTOR RUN LIST:

FROM	TO	WIRE COLOR
P1-1	P2-1	RED
P1-6	P2-6	BLACK
P2-2	P2-3	RED
P2-4	P2-5	RED

This connector connects
to Led Driver Output

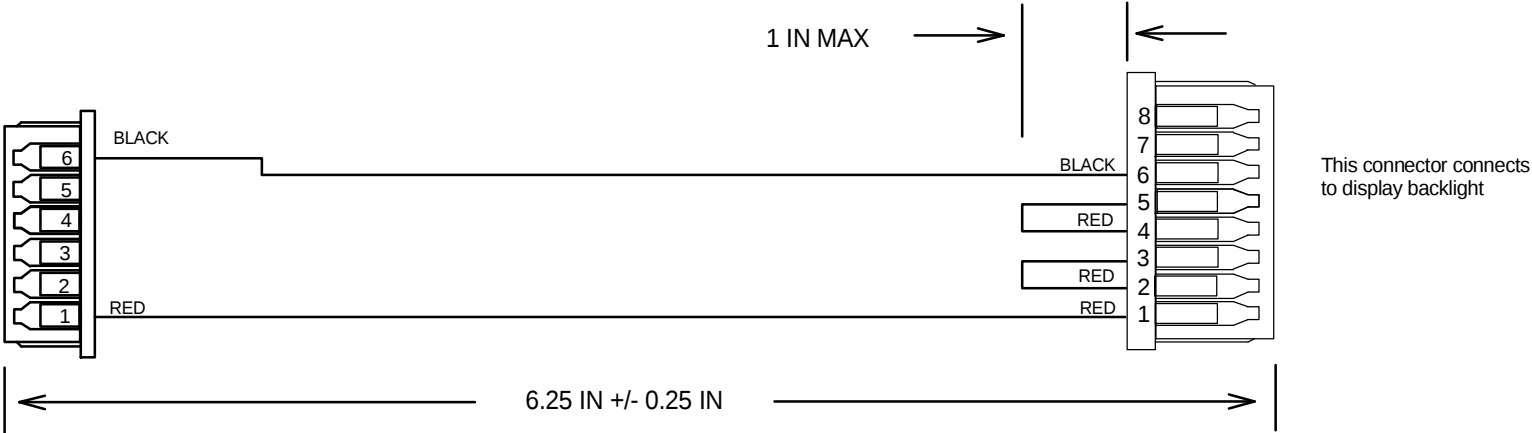

P1
MOLEX
51021-0600 (HOUSING)
50079-8000 (CONTACT SOCKET)

P2
JST
SHR-08V-S (RECEPTACLE HOUSING)
SSH-003T-P.02-H (PIN CONTACT)

BOM				
REF.	QTY	MANUFACTURER	P/N	DESCRIPTION
P1	1	MOLEX	51021-0600	CONNECTOR HOUSING, 6 CIRCUIT
P1	2	MOLEX	50079-8000	CONTACT SOCKET (NOT SHOWN)
P2	1	JST	SHR-08V-S	RECEPTACLE HOUSING, 8 CIRCUIT
P2	6	JST	SSH-003T-P.02-H	PIN CONTACT (NOT SHOWN)
WIRE, RED	AR	ALPHA WIRE OR EQUIVALENT	2842/7 RED	WIRE, RED, 28 (7/36) AWG, 105C
WIRE, BLACK	AR	ALPHA WIRE OR EQUIVALENT	2842/7 BLACK	WIRE, BLACK, 28 (7/36) AWG, 105C

Cable Assembly, Output, RoHS Compliant
(Connects output of ACI-2532
to NEC NL6448BC20-35D 6.5" X-4044)

LABEL INSTRUCTIONS	DRAWING NOT TO SCALE	SHEET 1 OF 1, 09/26/14
SD-0550	APPLIED CONCEPTS, INC.	27-R0199