


REF.	FROM	TERM.	TO	TERM.
W1	P2-1	SSH-003T-P0.2-H	SOLDER SPLICE S1	
W2	P1-1	50079-8000	P2-2 SSH-003T-P0.2-H	
W3	P2-3	SSH-003T-P0.2-H	SOLDER SPLICE S1	
W4	P1-2	50079-8000	P2-4 SSH-003T-P0.2-H	
W5	P2-5	SSH-003T-P0.2-H	SOLDER SPLICE S1	
W6	P1-3	50079-8000	P2-6 SSH-003T-P0.2-H	
W7	P2-7	SSH-003T-P0.2-H	SOLDER SPLICE S1	
W8	P1-4	50079-8000	P2-8 SSH-003T-P0.2-H	
W9	P2-9	SSH-003T-P0.2-H	SOLDER SPLICE S1	
W10	P1-5	50079-8000	P2-10 SSH-003T-P0.2-H	
W11	P2-11	SSH-003T-P0.2-H	SOLDER SPLICE S1	
W12	P1-6	50079-8000	P2-12 SSH-003T-P0.2-H	
W13	P1-8	50079-8000	SOLDER SPLICE S1	

*** NOTE: USE IIP 04 for Incoming Cable Assembly Inspection - ACI use ONLY

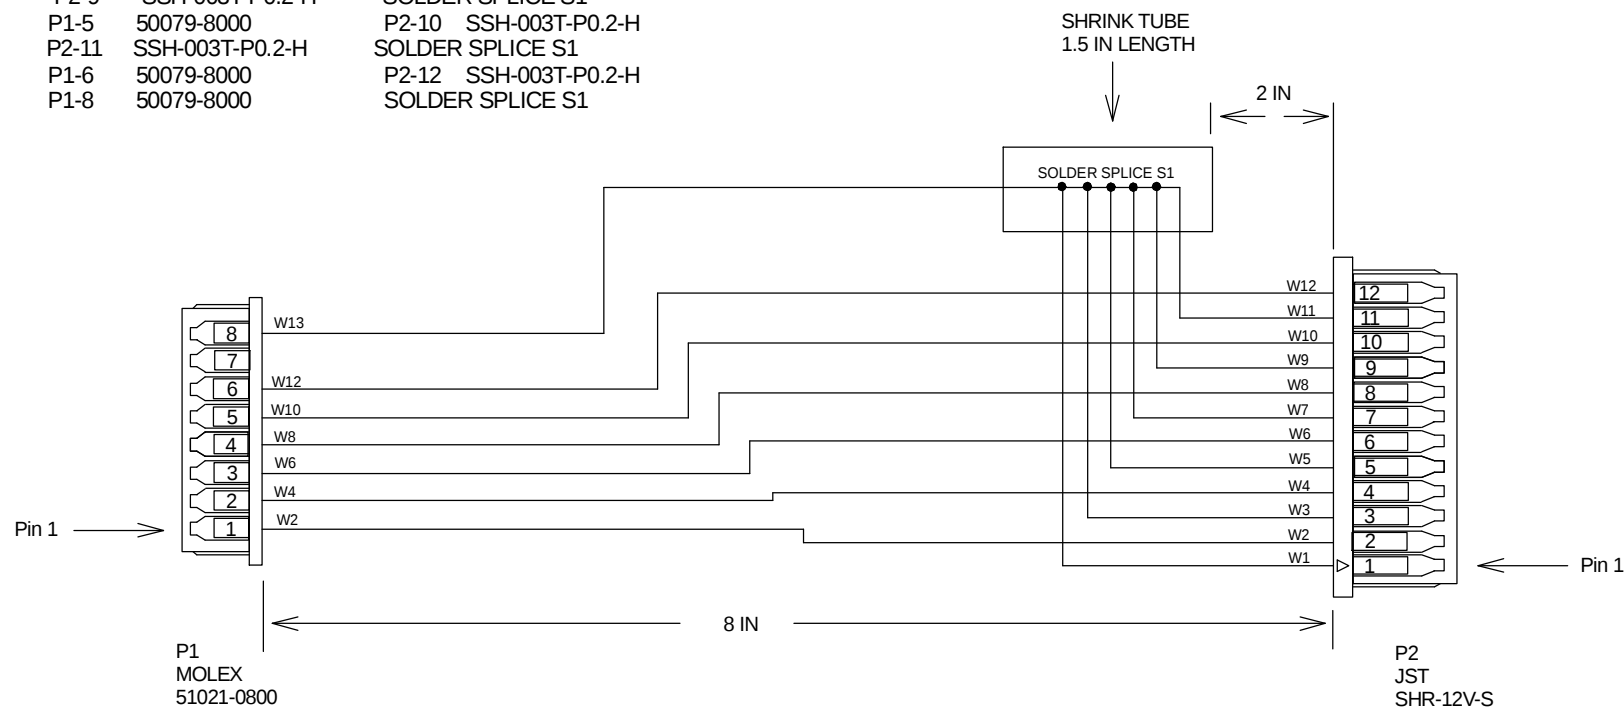

BOM

REF.	QTY	MANUFACTURER	P/N	DESCRIPTION
P1	1	MOLEX	51021-0800	CONNECTOR HOUSING, 8 CIRCUIT
P1	7	MOLEX	50079-8000	CONNECTOR CONTACT (NOT SHOWN)
P2	1	JST	SHR-12V-S	CONNECTOR HOUSING, 12 CIRCUIT
P2	12	JST	SSH-003T-P0.2-H	CONNECTOR CONTACT (NOT SHOWN)
W2,W4,W6,W8,W10,W12	AR	ALPHA OR EQUIVALENT	2842/7 BLACK	WIRE, 28 AWG STRANDED, 105C RATED, COLOR = BLACK
W1,W3,W5,W7,W9,W11,W13	AR	ALPHA OR EQUIVALENT	2842/7 RED	WIRE, 28 AWG STRANDED, 105C RATED, COLOR = RED
SHRINK TUBE	AR			COLOR = BLACK
SOLDER	AR			ROHS COMPLIANT

COMMON ANODE

SHEET 1 OF 1, 01/09/15

Cable Assembly, RoHS Compliant

LABEL INSTRUCTIONS

DRAWING NOT TO SCALE

SD-0550

APPLIED CONCEPTS, INC.

27-R0090