


REF.	FROM	TERM.	WIRE COLOR	TO	TERM.
W1	P1-1	50079-8000	RED	P2-4	SSHL-003T-P0.2H
W2	P1-2	50079-8000	RED	P2-5	SSHL-003T-P0.2H
W3	P1-3	50079-8000	RED	P2-8	SSHL-003T-P0.2H
W4	P1-4	50079-8000	RED	P2-9	SSHL-003T-P0.2H
W5	P1-5	50079-8000	BLACK	P2-3	SSHL-003T-P0.2H
W6	P1-6	50079-8000	BLACK	P2-6	SSHL-003T-P0.2H
W7	P1-7	50079-8000	BLACK	P2-7	SSHL-003T-P0.2H
W8	P1-8	50079-8000	BLACK	P2-10	SSHL-003T-P0.2H

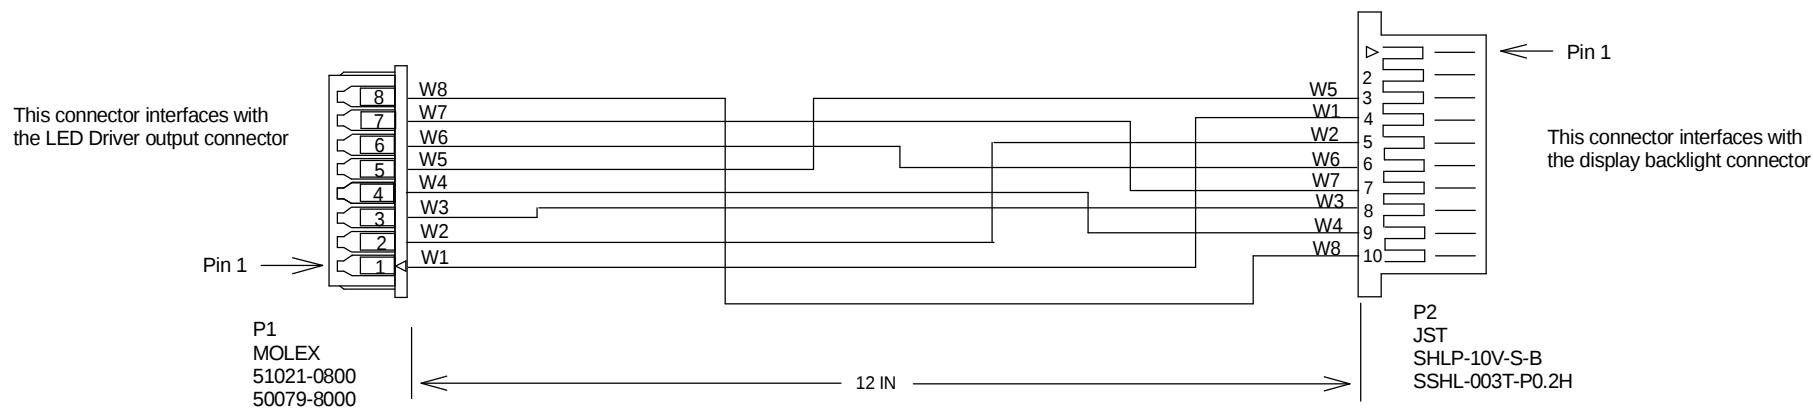

BOM

REF.	QTY	MANUFACTURER	P/N	DESCRIPTION
P1	1	MOLEX	51021-0800	CONNECTOR HOUSING, 8 CIRCUIT
P1	8	MOLEX	50079-8000	CONTACT SOCKET (NOT SHOWN)
P2	1	JST	SHLP-10V-S-B	CONNECTOR HOUSING, 10 CIRCUIT
P2	8	JST	SSHL-003T-P0.2H	CONTACT SOCKET (NOT SHOWN)
W1, W2, W3, W4	AR	ALPHA WIRE OR EQUIVALENT	2842/ 7 RED	WIRE, RED, 28 (7/36) AWG, 105C
W5, W6, W7, W8	AR	ALPHA WIRE OR EQUIVALENT	2842/ 7 BLACK	WIRE, BLACK, 28 (7/36) AWG, 105C

Cable Assembly, Output, RoHS Compliant
(The eight-channel ID5 will use
two per driver, to drive an eight-channel display)

LABEL INSTRUCTIONS

DRAWING NOT TO SCALE

SHEET 1 OF 1, 01/09/14

SD-0550

APPLIED CONCEPTS, INC.

27-R0097