


FROM	TERMINATION	TO	TERMINATION
P1-1	SSHL-003T-P0.2	P2-1	DF19-2830SCFA
P1-2	SSHL-003T-P0.2	P2-3	DF19-2830SCFA
P1-3	SSHL-003T-P0.2	P2-5	DF19-2830SCFA
P1-4	SSHL-003T-P0.2	P2-2	DF19-2830SCFA
P1-5	SSHL-003T-P0.2	P2-4	DF19-2830SCFA
P1-6	SSHL-003T-P0.2	P2-6	DF19-2830SCFA

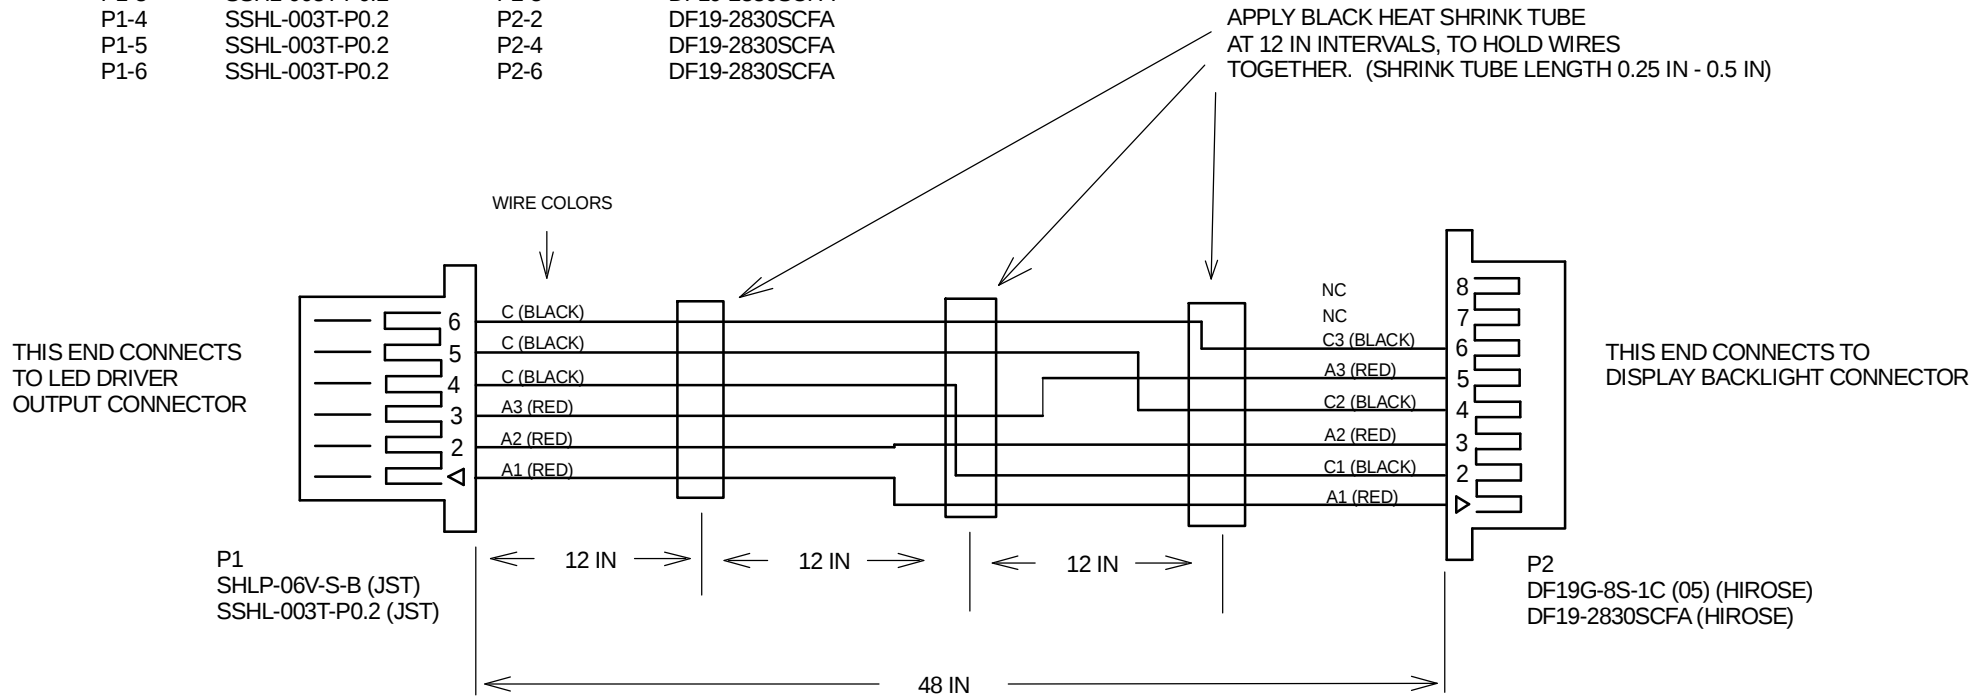

BOM REF.	QTY	MANUFACTURER	P/N	DESCRIPTION
P1	1	JST	SHLP-06V-S-B	CONNECTOR HOUSING
P1	6	JST	SSHL-003T-P0.2	CONTACT (NOT SHOWN)
P2	1	HIROSE	DF19G-8S-1C(05)	CONNECTOR HOUSING
P2	6	HIROSE	DF19-2830SCFA	CONTACT (NOT SHOWN)
WIRE	AR	ALPHA OR EQUIVALENT	2842/7 RED	WIRE, 28 AWG 7/36, INSULATION OD 0.5MM - 0.6MM, 105C RATED
WIRE	AR	ALPHA OR EQUIVALENT	2842/7 BLACK	WIRE, 28 AWG 7/36, INSULATION OD 0.5MM - 0.6MM, 105C RATED
SHRINK TUBE	AR			SHRINK TUBE, BLACK

Custom Output Cable Assembly
For ACI-A038025-2032
RoHS Compliant

LABEL INSTRUCTIONS

SD-0550

DRAWING NOT TO SCALE

APPLIED CONCEPTS, INC.

SHEET 1 OF 1, 01/09/14

27-R0105