


*** NOTE: USE IIP 04 for Incoming Cable Assembly
Inspection - ACI use ONLY

CONNECTOR RUN LIST:

FROM	TO	WIRE COLOR
P1-1	P3-1	RED
P1-2	P3-3	RED
P1-3	P3-5	RED
P1-4	P3-2	BLACK
P1-5	P3-4	BLACK
P1-6	P3-6	BLACK
P2-1	P3-7	RED
P2-2	P3-9	RED
P2-3	P3-11	RED
P2-4	P3-8	BLACK
P2-5	P3-10	BLACK
P2-6	P3-12	BLACK

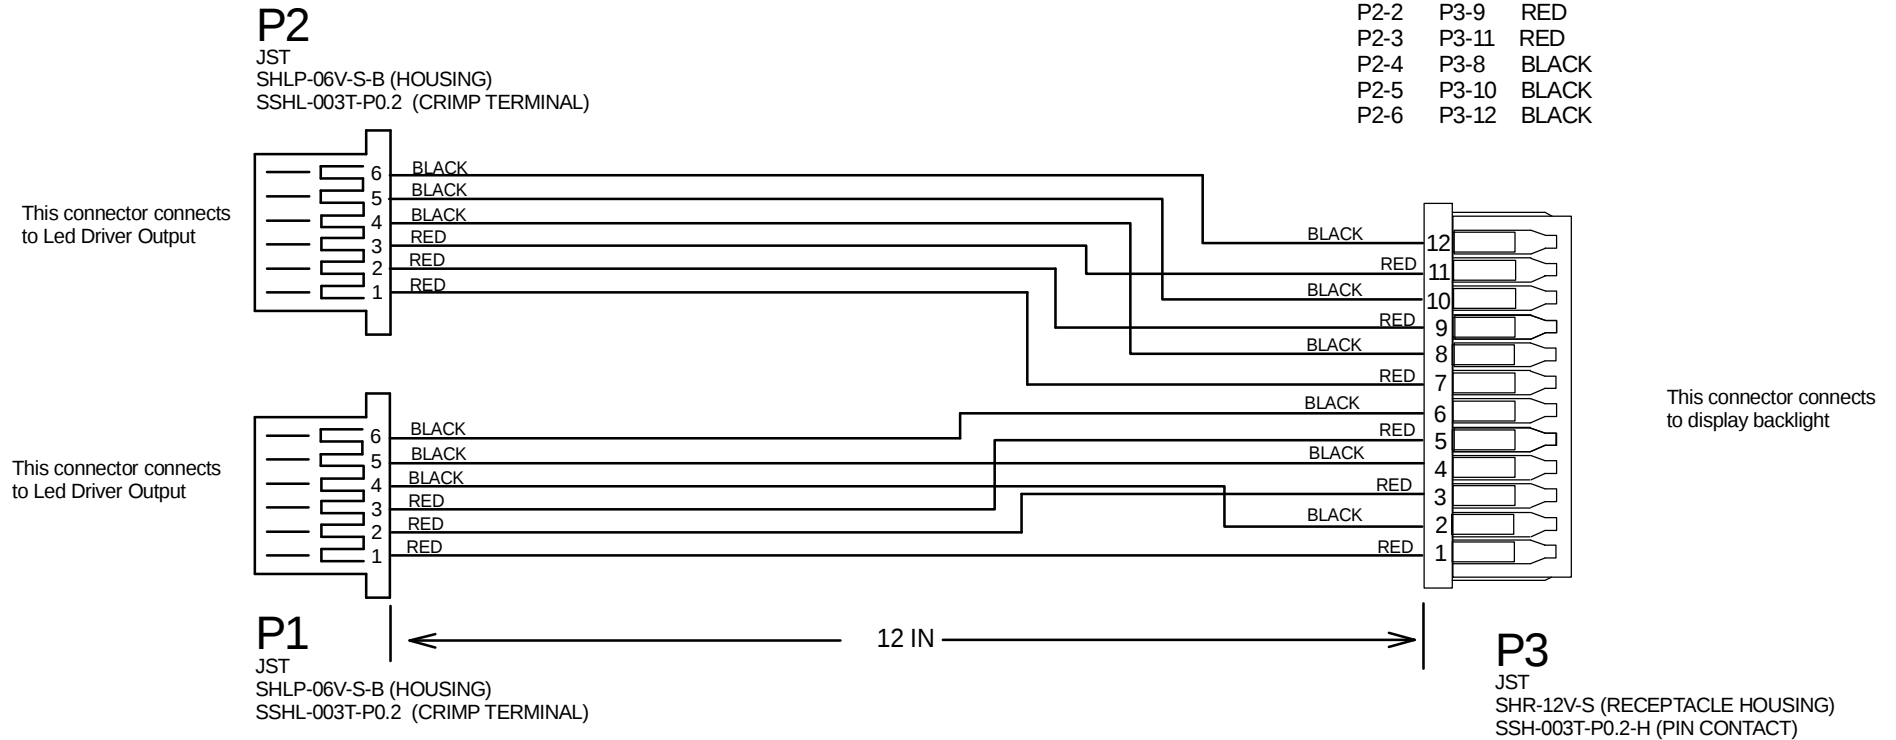

BOM

REF.	QTY	MANUFACTURER	P/N	DESCRIPTION
P1, P2	2	JST	SHLP06V-S-B	CONNECTOR HOUSING, 6 CIRCUIT
P1, P2	12	JST	SSHL-003T-P0.2	CRIMP TERMINAL (NOT SHOWN)
P3	1	JST	SHR-12V-S	RECEPTACLE HOUSING, 12 CIRCUIT
P3	12	JST	SSH-003T-P0.2-H	PIN CONTACT (NOT SHOWN)
WIRE, RED	AR	ALPHA WIRE OR EQUIVALENT	2842/7 RED	WIRE, RED, 28 (7/36) AWG, 105C RATED
WIRE, BLACK	AR	ALPHA WIRE OR EQUIVALENT	2842/7 BLACK	WIRE, BLACK, 28 (7/36) AWG, 105C RATED

Cable Assembly, Output, RoHS Compliant
(Connects output of ACI-A036050-2322
to NLT NL10276BC30-39 15.0" X-3813)

LABEL INSTRUCTIONS

DRAWING NOT TO SCALE

SHEET 1 OF 1, 4/13/15

SD-0550

APPLIED CONCEPTS, INC.

27-R0156